


RESISTOR READER

SET1 BOOT VOLTAGE=1V, R3=OPEN; R2=75K OHMS

SET2 PFM DISABLED, TCOMP=5C, R11=OPEN; R10=147K OHMS

SET3 RETRY,400KHZ_AV49 AND 25KHZ CLAMP DISABLED, R9= 25.5K OHMS; R8= 16.5K OHMS

SET4 SS= 0.157MV/US, RR=200KOHM AND AVMULTI=2X, R6= 332K OHMS;R5=154K OHMS

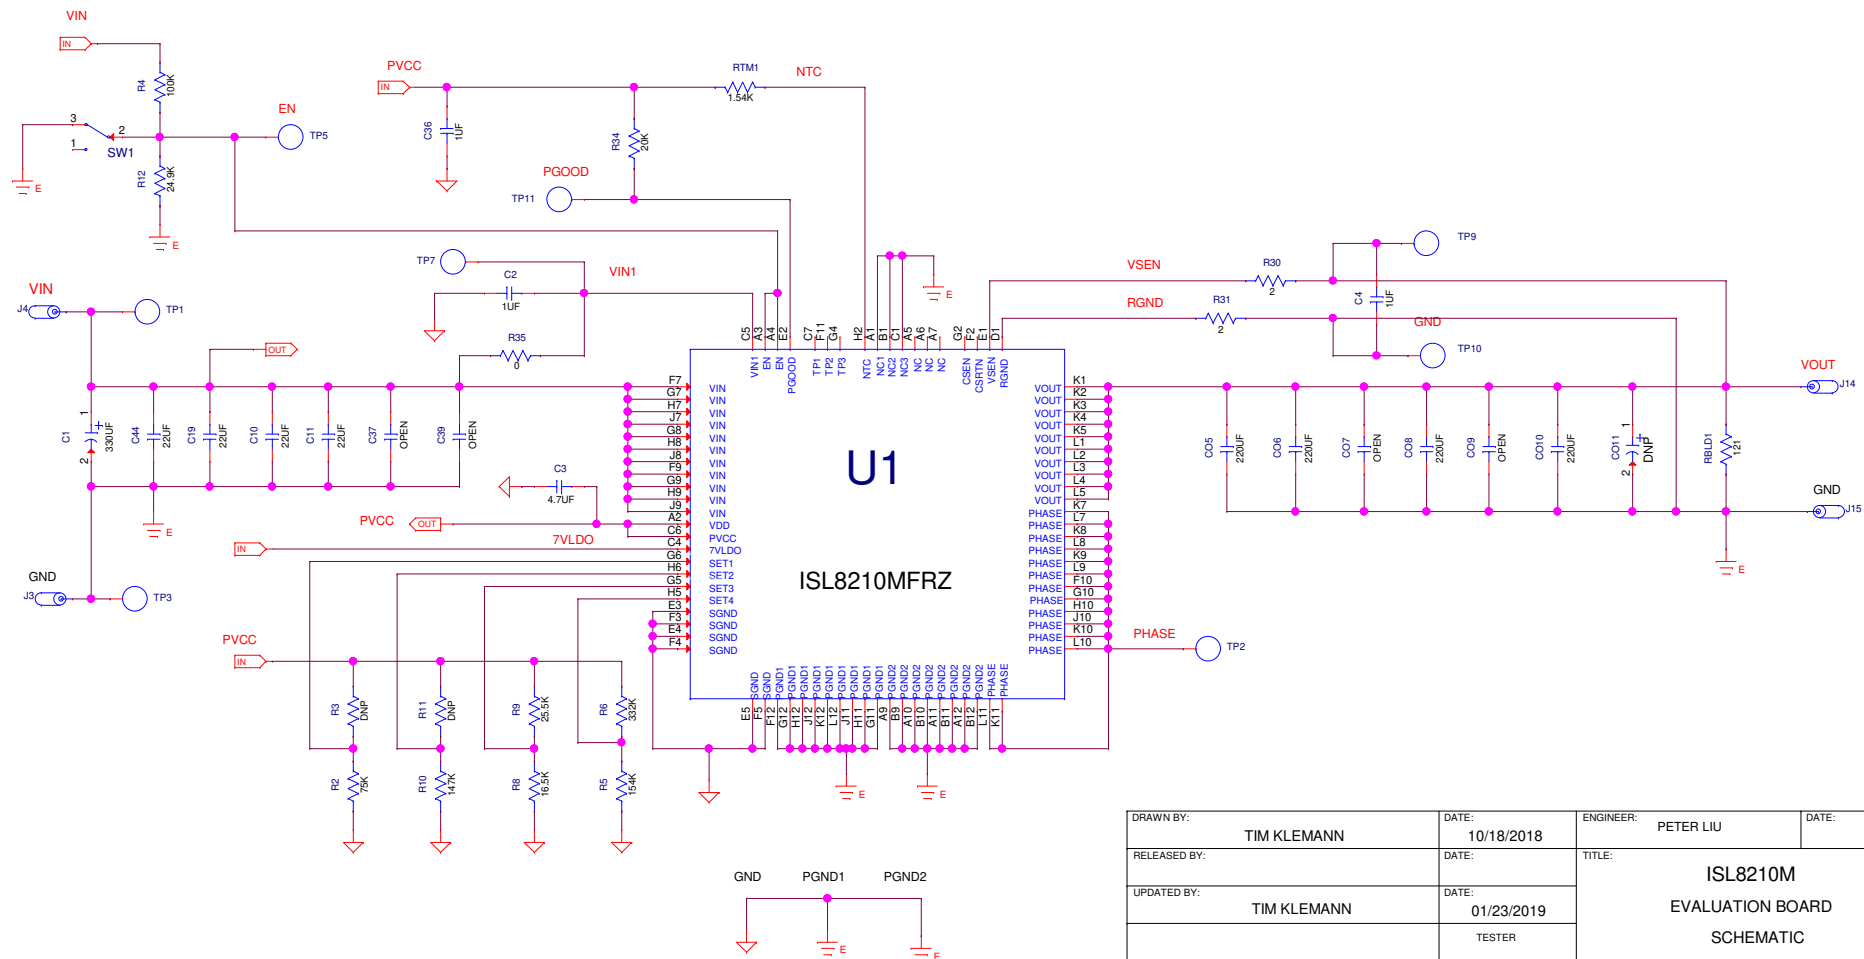

DRAWN BY:	TIM KLEMMANN	DATE:	10/18/2018	ENGINEER:	PETER LIU	DATE:	
RELEASED BY:		DATE:		TITLE:	ISL8210M EVALUATION BOARD SCHEMATIC		
UPDATED BY:	TIM KLEMMANN	DATE:	01/23/2019	TESTER:			
				MASK#	HRDWR ID	REV.	A1
				FILENAME: ~\ISL8210M\ISL8210MEVAL1ZA		SHEET	1 OF 1