
ISL71091SEH33**Neutron Test Report**

Introduction

This report summarizes the results of 1MeV equivalent neutron testing of the [ISL71091SEH33](#) precision voltage reference. The test was conducted to determine the sensitivity of the part to Displacement Damage (DD) caused by neutron or proton environments. Neutron fluences ranged from $5 \times 10^{11} \text{ n/cm}^2$ to $1 \times 10^{14} \text{ n/cm}^2$. This project was carried out in collaboration with Honeywell Aerospace in Clearwater, FL, and their support is gratefully acknowledged. This report is also applicable to the other variants (ISL71091SEH20 (2.048V), ISL71091SEH40 (4.096V) and ISL71091SEH10 (10.0V).

Product Description

The ISL71091SEH33 is an ultra-low noise, high DC accuracy precision voltage reference with a wide input voltage range from 4.6V to 30V. It uses the Renesas advanced proprietary bipolar technology, PR40, to achieve $5.2 \mu\text{V}_{\text{P-P}}$ 0.1Hz to 10Hz noise with an initial voltage accuracy of 0.05% across the operating temperature range of -55°C to +125°C. This device is fabricated on Silicon on Insulator (SOI) and is immune to single event latch-up.

The ISL71091SEH33 offers a 3.3V output voltage option with 6ppm/°C temperature coefficient and also provides excellent line and load regulation. The device is offered in an 8 Ld flatpack package.

Specifications for Rad Hard QML devices are controlled by the Defense Logistics Agency (DLA) in Columbus, OH. The SMD is the controlling document and must be cited when ordering.

Related Literature

For a full list of related documents, visit our website:

- [ISL71091SEH33](#), [ISL71091SEH20](#), [ISL71091SEH40](#), [ISL71091SEH10](#) device pages
- MIL-STD-883 test method 1017

1. Test Description

1.1 Irradiation Facility

Neutron fluence irradiations were performed on the test samples on June 25, 2018, at the WSMR Fast Burst Reactor (FBR) per Mil-STD-883G, Method 1017.2, with each part unpowered during irradiation and all leads shorted. The target irradiation levels were $5 \times 10^{11} \text{n/cm}^2$, $2 \times 10^{12} \text{n/cm}^2$, $1 \times 10^{13} \text{n/cm}^2$, and $1 \times 10^{14} \text{n/cm}^2$. As neutron irradiation activates many of the heavier elements found in a packaged integrated circuit, the parts exposed at the higher neutron levels required (as expected) some cooldown time before being shipped back to Renesas (Palm Bay, FL) for electrical testing.

1.2 Test Fixturing

No formal irradiation test fixturing is involved, as these DD tests are considered bag tests, which means the parts are irradiated with all leads shorted together.

1.3 Radiation Dosimetry

[Table 1](#) shows the TLD and Sulfur pellet dosimetry from WSMR indicating the total accumulated gamma dose and actual neutron fluence exposure levels for each set of samples. This dosimetry process is traceable to NIST (IAW ASTM E722).

Table 1. ISL71091SEH33 Neutron Fluence Dosimetry Data

TLD		Sulfur Pellet						
TLD #	cGy(Si)	Pellet #	Distance (inches)	Exposure ID	Flu > 3MeV (n/cm ²)	% Unc	Total Fluence (n/cm ²)	1Mev Si (n/cm ²)
296	1.168E+02	7001	26.6	Free Field	7.611E+10	7.1%	6.154E+11	5.294E+11
276	3.608E+02	6412	13.45	Free Field	2.810E+11	7.1%	2.217E+12	1.966E+12
261	2.295E+03	6486	24	Free Field	1.474E+12	7.1%	1.182E+13	1.023E+13
250	1.575E+04	6465	8	Free Field	1.136E+13	7.1%	8.916E+13	7.965E+13

Notes:

1. 1cGy(Si) = 1rad(Si)
2. The Uncertainty (% Unc) column is applicable only to the Fluence > 3MeV.

1.4 Characterization Equipment and Procedures

Electrical testing was performed before and after irradiation using the production Automated Test Equipment (ATE). All electrical testing was performed at room temperature.

1.5 Experimental Matrix

Testing proceeded in general accordance with the guidelines of MIL-STD-883 TM 1017. The experimental matrix consisted of five samples irradiated at $5 \times 10^{11} \text{n/cm}^2$, five irradiated at $2 \times 10^{12} \text{n/cm}^2$, five irradiated at $1 \times 10^{13} \text{n/cm}^2$, and five irradiated at $1 \times 10^{14} \text{n/cm}^2$. Three control units were used.

ISL71091SEH33 samples were drawn from lots WXM8XDB and WXM8AFBA. Samples were packaged in the 8 Ld ceramic flatpack package (package code KCJ). Samples were processed through burn-in before irradiation and screened to the SMD limits at room, low, and high temperatures before the start of neutron testing.

2. Results

Neutron testing of the ISL71091SEH33 is complete and the results are reported in the balance of this report. It should be understood when interpreting the data that each neutron irradiation was performed on a different set of samples; this is not total dose testing, where the damage is cumulative.

2.1 Attributes Data

[Table 2](#) summarizes the neutron exposure test results. The maximum planned fluence of $1 \times 10^{14} \text{ n/cm}^2$ was not achieved; the actual maximum fluence reached $7.97 \times 10^{13} \text{ n/cm}^2$.

Table 2. Attributes Data

Fluence, (n/cm ²)		Sample Size	Pass (Note 3)	Fail
Planned	Actual			
5×10^{11}	5.30×10^{11}	5	5	0
2×10^{12}	1.97×10^{12}	5	5	0
1×10^{13}	1.02×10^{13}	5	5	5
1×10^{14}	7.97×10^{13}	5	0	5

Note:

3. Pass indicates a sample that passes all SMD limits.

2.2 Variables Data

The plots in [Figures 1](#) through [6](#) show data plots for key parameters before and after irradiation to each level. The plots show the mean of each parameter as a function of neutron irradiation. The plots include error bars at each down-point, representing the minimum and maximum measured values of the samples, although in some plots the error bars might not be visible due to their values compared to the scale of the graph. While the applicable electrical limits taken from the SMD are also shown, it should be noted that these limits are provided for guidance only, the ISL71091SEH33 is not specified for the neutron environment.

All samples passed the post-irradiation SMD limits after all exposures up to and including $1 \times 10^{13} \text{ n/cm}^2$, but failed at $1 \times 10^{14} \text{ n/cm}^2$, with one part failing output voltage accuracy, as shown in [Figure 1](#), and all of the parts failing line regulation as shown in [Figure 3](#).

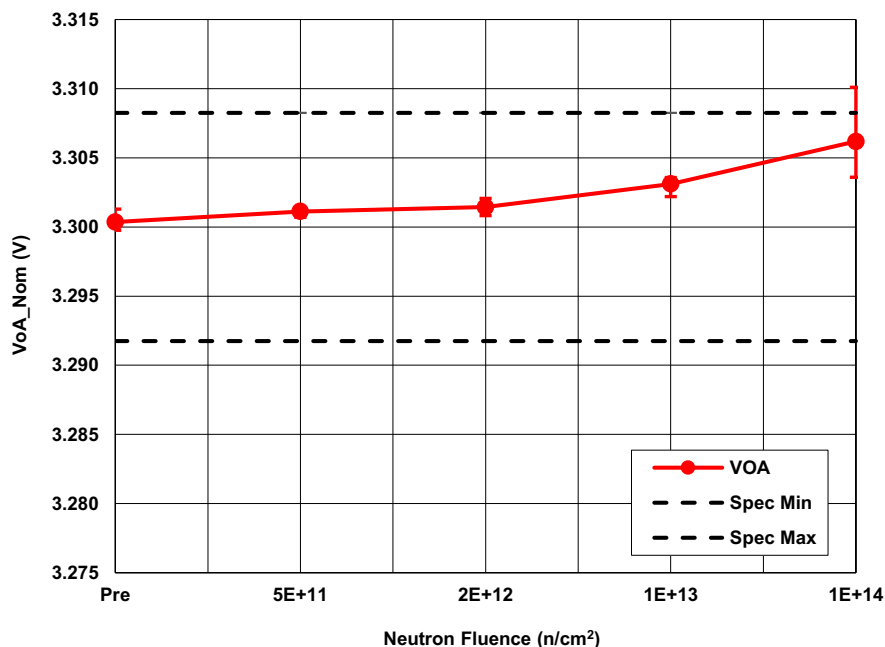


Figure 1. ISL71091SEH33 output voltage (V_{OA}), following irradiation to each neutron fluence level. The error bars, if visible, represent the minimum and maximum measured values. The post-irradiation SMD limits are 3.29175V minimum and 3.30825V maximum ($\pm 0.25\%$).

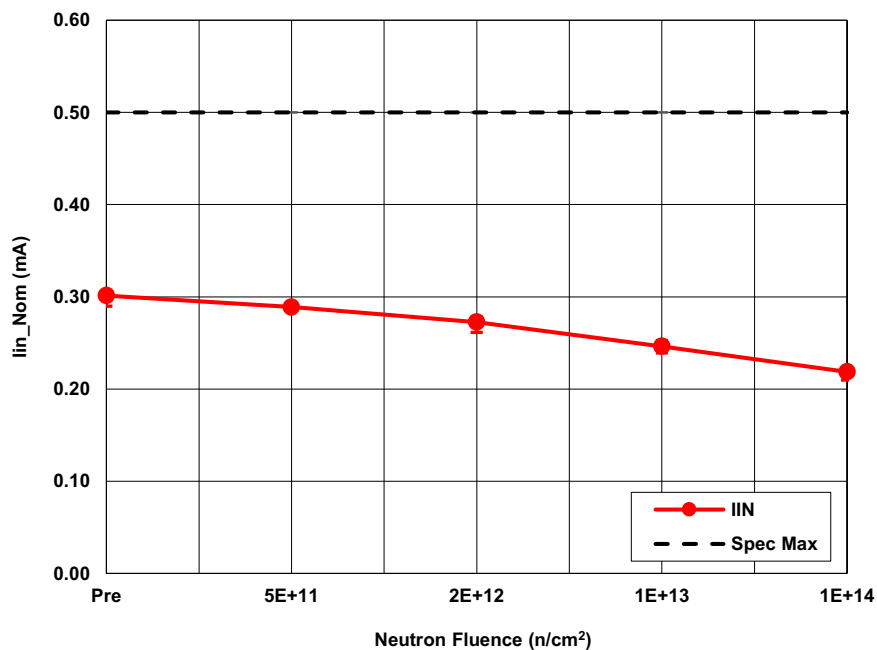


Figure 2. ISL71091SEH33 supply current (I_{IN}), following irradiation to each neutron fluence level. The error bars, if visible, represent the minimum and maximum measured values. The post-irradiation SMD limit is 0.5mA maximum.

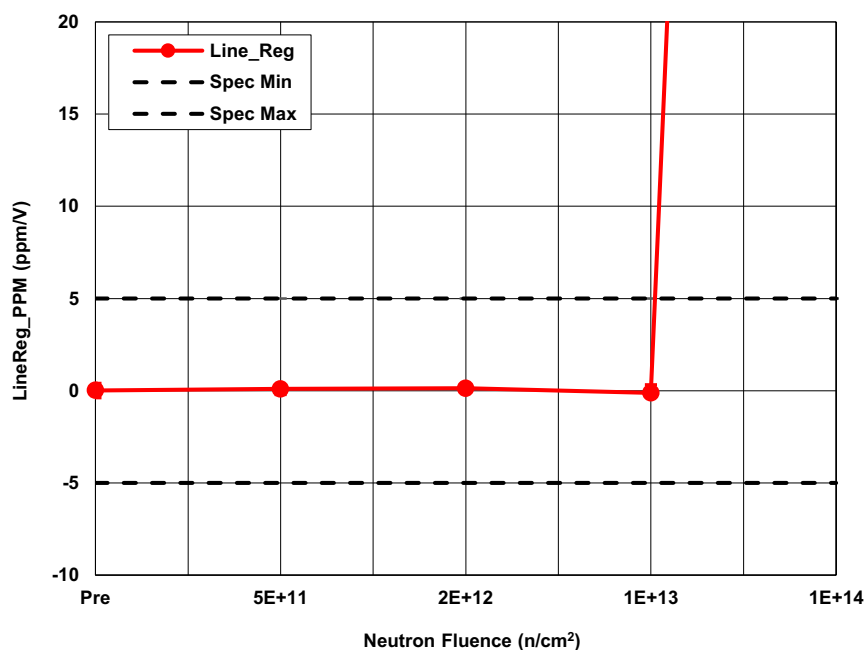


Figure 3. ISL71091SEH33 line regulation ($\Delta V_{OUT}/\Delta V_{IN}$), following irradiation to each neutron fluence level. The error bars, if visible, represent the minimum and maximum measured values. The post-irradiation SMD limits are -5ppm/V minimum and +5ppm/V maximum. Note: The 1E+14n/cm² data point is not shown to show the performance of the part below that level (the average value was 228ppm/V).

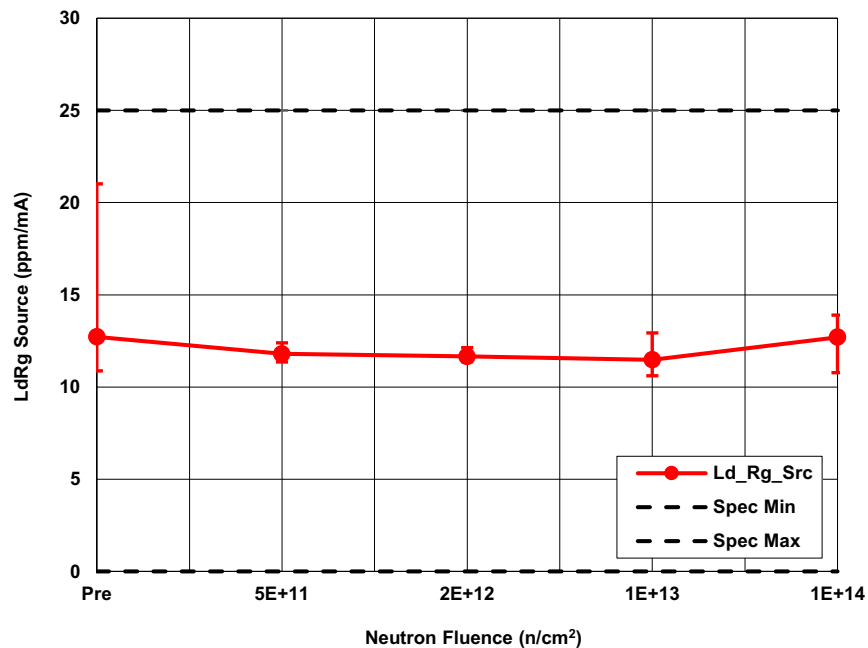


Figure 4. ISL71091SEH33 load regulation sourcing 10mA ($\Delta V_{OUT}/\Delta I_{OUT}$), following irradiation to each neutron fluence level. The error bars, if visible, represent the minimum and maximum measured values. The post-irradiation SMD limit is -25ppm/V minimum and +25ppm/V maximum.

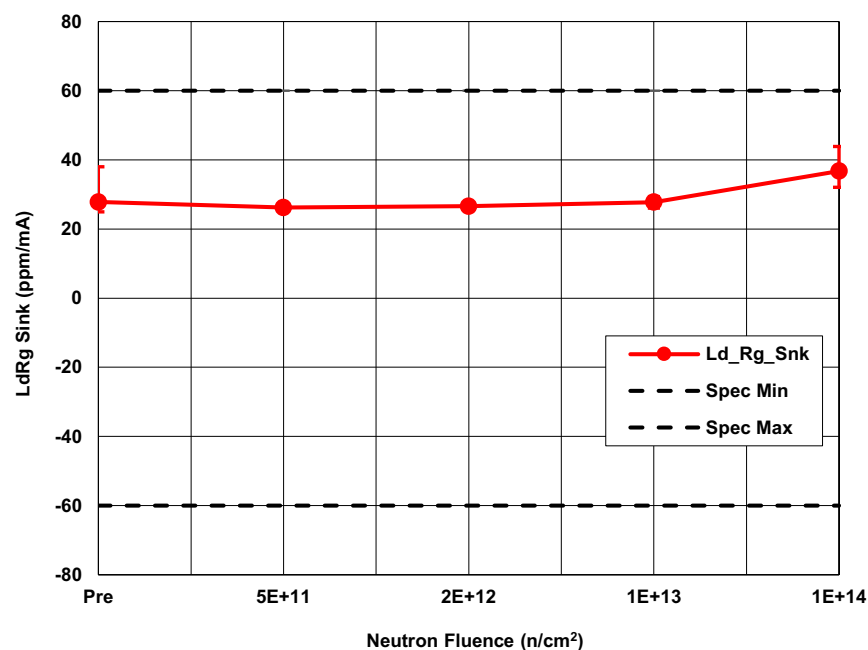


Figure 5. ISL71091SEH33 load regulation sinking 5mA ($\Delta V_{OUT}/\Delta I_{OUT}$), following irradiation to each neutron fluence level. The error bars, if visible, represent the minimum and maximum measured values. The post-irradiation SMD limit -60ppm/V minimum and +60ppm/V maximum.

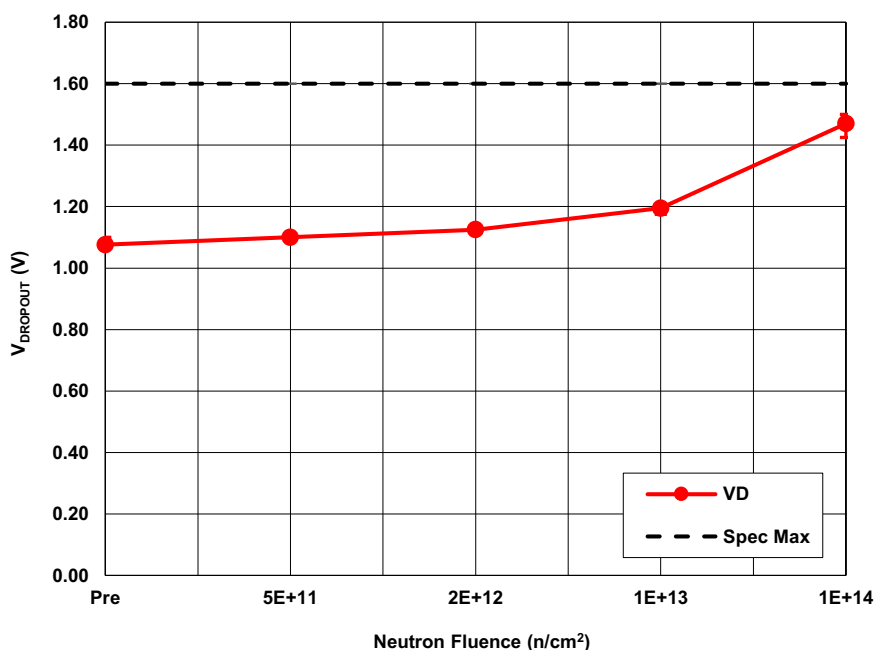


Figure 6. ISL71091SEH33 dropout voltage (V_D), following irradiation to each neutron fluence level. The error bars, if visible, represent the minimum and maximum measured values. The post-irradiation SMD limit is 1.6V maximum.

3. Discussion and Conclusion

The results of 1MeV equivalent neutron testing of the ISL71091SEH33 precision voltage reference were reported. Parts were tested at $5 \times 10^{11} \text{ n/cm}^2$, $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, and $1 \times 10^{14} \text{ n/cm}^2$. The results of key parameters before and after irradiation to each level are plotted in [Figures 1](#) through [6](#). The plots show the mean of each parameter as a function of neutron irradiation, with error bars that represent the minimum and maximum measured values. All samples passed the SMD limits after all exposures up to and including $1 \times 10^{13} \text{ n/cm}^2$, but failed at $1 \times 10^{14} \text{ n/cm}^2$.

4. Appendices

4.1 Reported Parameters

Figure	Parameter	Symbol	Limit, Low	Limit, High	Units	Notes
1	V_{OUT} Accuracy	V_{OA}	-0.25	0.25	%	3.29175V to 3.30825V
2	Supply Current	I_{IN}	-	0.5	mA	
3	Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	-5	5	ppm/V	
4	Load Regulation, Sourcing	$\Delta V_{OUT}/\Delta I_{OUT}$	-25	25	ppm/mA	10mA
5	Load Regulation, Sinking	$\Delta V_{OUT}/\Delta I_{OUT}$	-60	60	ppm/mA	5mA
6	Dropout Voltage	V_D	-	1.6	V	

5. Revision History

Rev.	Date	Description
1.00	Oct.21.19	Initial release

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/