


32-PIN PLASTIC SOP (13.34 mm (525))

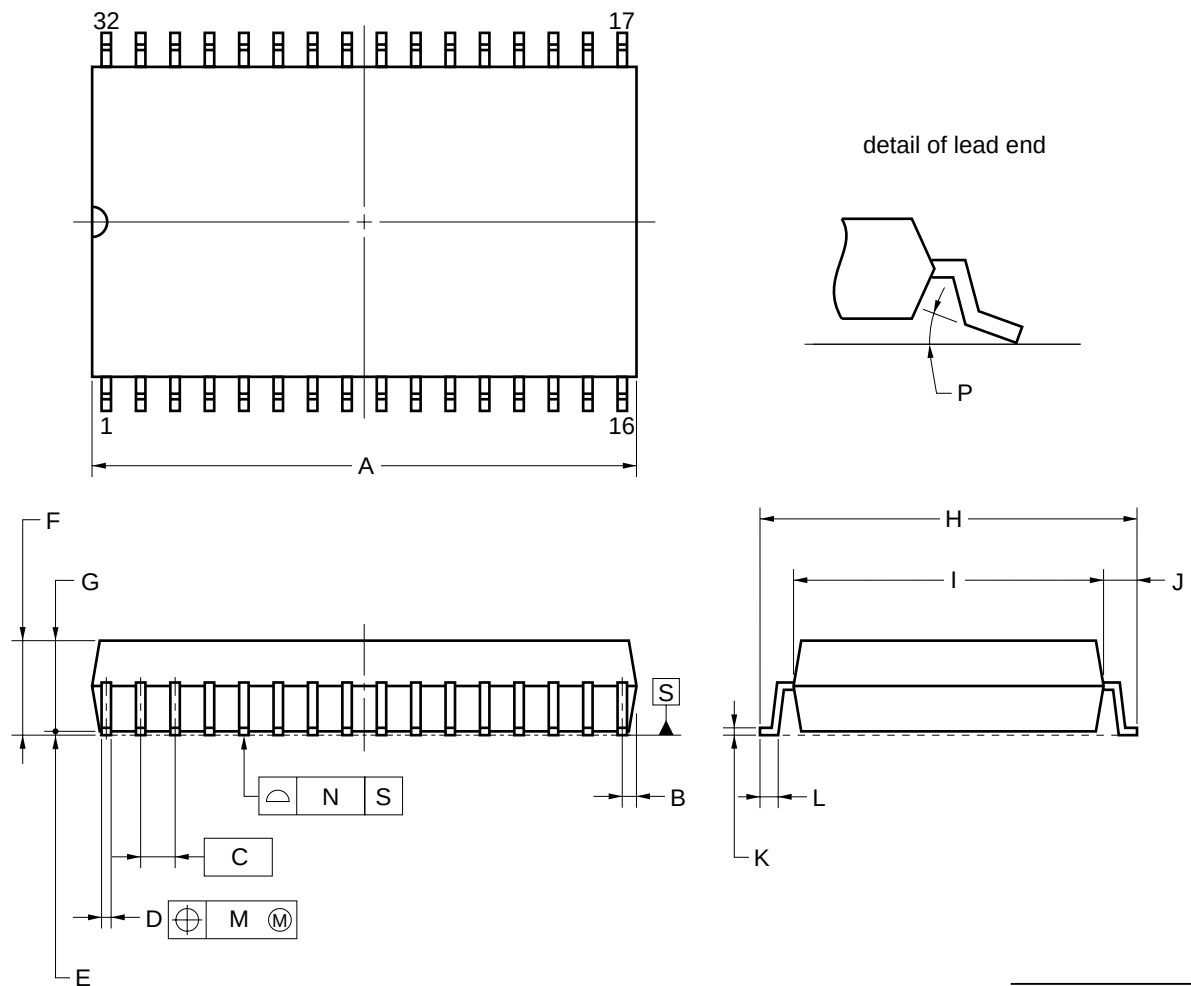

NOTE

Each lead centerline is located within 0.12 mm of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS
A	20.61 MAX.
B	0.78 MAX.
C	1.27 (T.P.)
D	0.40 ^{+0.10} _{-0.05}
E	0.05±0.05
F	2.85 MAX.
G	2.7
H	14.1±0.3
I	11.3
J	1.4
K	0.20 ^{+0.10} _{-0.05}
L	0.8±0.2
M	0.12
N	0.10
P	5°±5°

S32GM-50-525A-3