

致尊敬的顾客

关于产品目录等资料中的旧公司名称

NEC电子公司与株式会社瑞萨科技于2010年4月1日进行业务整合（合并），整合后的新公司暨“瑞萨电子公司”继承两家公司的所有业务。因此，本资料中虽还保留有旧公司名称等标识，但是并不妨碍本资料的有效性，敬请谅解。

瑞萨电子公司网址：<http://www.renesas.com>

2010年4月1日
瑞萨电子公司

【发行】瑞萨电子公司（<http://www.renesas.com>）

【业务咨询】<http://www.renesas.com/inquiry>

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

M16C/Tiny 系列

定时器 B 操作（脉冲周期测量模式）

1. 要点

在脉冲周期/脉冲宽度测量模式中，可以选择如表 1 中所列的各种功能。在表 1 中用符号“○”表示本篇资料所选的项目，图 1 是定时器的工作时序图。本篇资料的参考例程是定时器 B0 选择脉冲周期测量模式的例子。

2. 说明

本篇资料，适用于 M16C/26A、M16C/28、M16C/29 群单片机。

本篇资料中的参考例程也适用于 M16C 族产品中与 M16C/26A、M16C/28、M16C/29 群具有相同 SFR（特殊功能寄存器）定义的产品。

由于 M16C 系列产品中有些功能会有所改进，请参看用户手册。如果使用本篇资料中所列功能时，请仔细检查每一步操作。

3. 选定功能

表 1. 选定功能

设定项目	设定内容	
计数源	○	内部计数源（f1, f2, f8, f32, fC32）
测量模式	○	脉冲周期测量（从测量脉冲的下降沿到下一个下降沿之间的测量）
		脉冲周期测量（从测量脉冲的上升沿到下一个上升沿之间的测量）
		脉冲宽度测量（从测量脉冲的下降沿到下一个上升沿之间的测量和从测量脉冲的上升沿到下一个下降沿之间的测量）

4. 定时器 B 的操作

- (1) 把计数开始标志位置为“1”，计数器开始对计数脉冲源进行计数。
- (2) 当第一次检测到脉冲电平由“H”变为“L”时，计数器值变为“0000h”，并开始测量。在这种情况下，重加载寄存器的值不定，定时器 Bi 不产生中断请求。
- (3) 当再次检测到脉冲电平由“H”变为“L”时，将计数器的值传送给重加载寄存器，定时器 Bi 中断请求标志位置为“1”。然后，计数器变为“0000h”，开始下一次测量。

注意事项:

- 当检测到脉冲的有效沿输入或定时器 Bi 计数溢出时，定时器 Bi 中断请求标志置为“1”。在中断程序中通过检测 Bi 溢出标志位，对中断请求的原因进行判断。
- 在计数开始时计数器的值不定。因此，从开始计数到另一有效沿输入时间间隔内，定时器 Bi 溢出标志位可能为“1”，并有可能产生定时器 Bi 中断请求。
- 复位后，定时器 Bi 溢出标志的值不定。在计数开始标志位为“1”的状态下，若进行定时器 Bi 模式寄存器的写入操作，定时器 Bi 溢出标志位变为“0”，并且该标志位不能通过程序置“1”。

选择脉冲周期测量模式的定时器工作时序图如下所示:


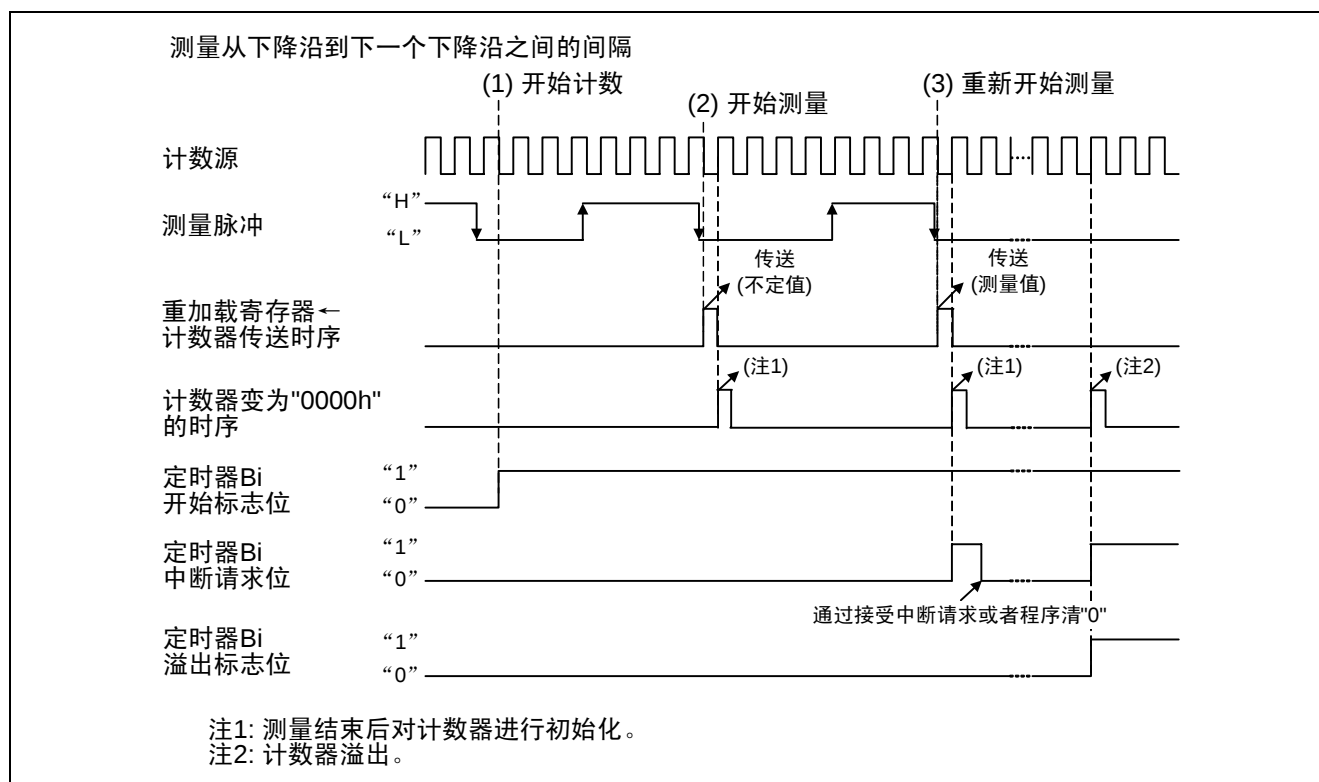


图 1. 脉冲周期测量模式工作时序图

5. 寄存器设置


为了能够实现定义在“4. 定时器 B 的操作”的功能，下列寄存器必须按步骤进行设置。对于每个寄存器的具体结构请参考 M16C/26A 群、M16C/28 群、M16C/29 群的硬件手册。

(1) 选择脉冲周期/脉冲宽度测量模式

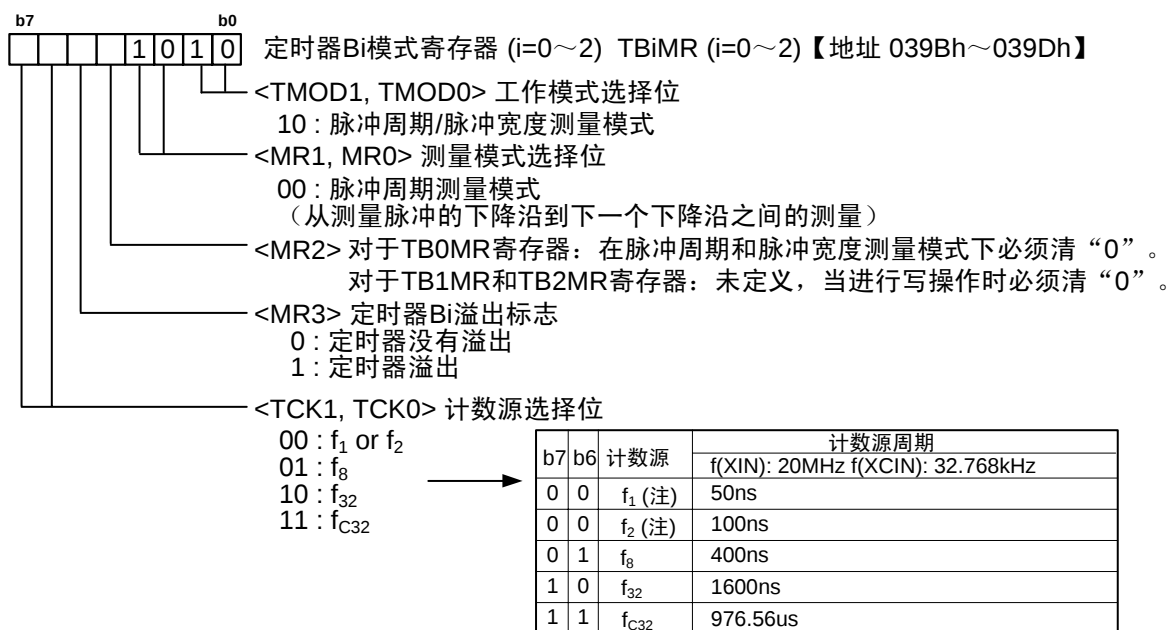


(2) 设置时钟预分频器复位标志


（这一功能只在选择 f_{C32} 作为计数源时有效。复位预分频器是为了产生XCIN时钟的32分频即 f_{C32} ）

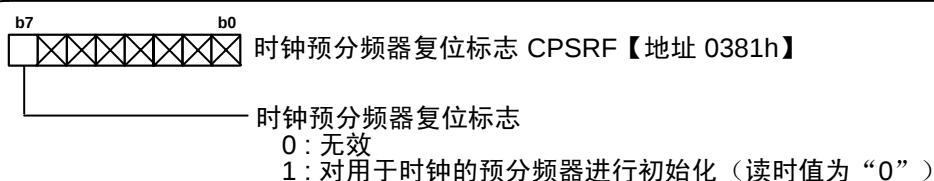

(3) 设置定时器计数开始标志

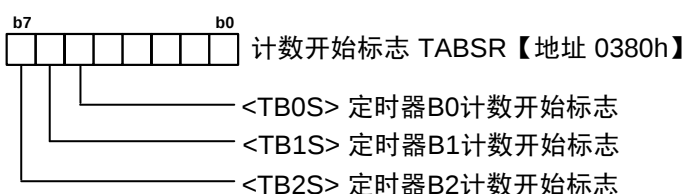

(4) 清除溢出标志

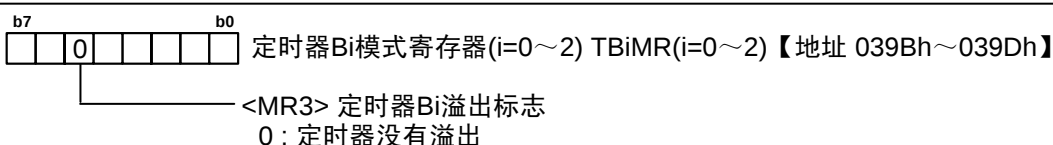

6. 参考例程

```

/*****
/*
/* M16C/Tiny Series Program Collection
/*
/* File name      : rec05b0011-0101_src.c
/* CPU            : M16C/29 Group
/* Function       : Operation of Timer B
/*                (pulse period measurement mode)
/* Version        : 2006.04.13 Ver 1.01
/*
/* Copyright (C) 2005. Renesas Technology Corp.
/* All right reserved.
/*
*****/

/*****
/*      Include File
*****/
#include "sfr29.h"          // Special function register header file

/*****
/*      Definition Interrupt
*****/
#pragma interrupt tb0_int

/*****
/*      Function Declaration
*****/
void mcu_init(void);        // MCU initialize routine
void timerB0_init(void);    // Timer B0 initialize routine
void wait_10ms(void);       // Main clock oscillation stable wait routine

/*****
/*      Define Label
*****/
#define PRODUCT_TYPE 0      // 28,29 group: 0    26A group: 1
#define PIN_TYPE 0         // 80 pin: 0      64 pin: 1 (28,29 group)
                          // 48 pin: 0      42 pin: 1 (26A group)

/*****
/*      Main Program
*****/
void main(void) {
    mcu_init();             // MCU initialize routine

    timerB0_init();         // Timer B0 initialize routine

    tabsr = 0x20;           // Setting count start flag
                          // <TB0S> : TimerB0 Starts counting

    asm("nop");             // Wait next count timing
    asm("nop");
    asm("nop");
    asm("nop");
    asm("nop");

```

```

mr3_tb0mr = 0;    // This flag is indeterminate after reset. When the TB0S bit=1,
                  // the MR3 bit is cleared to "0" by writing to the TB0MR register
                  // at the next count timing or later after the MR3 bit was
                  // set to "1".

asm("fset i");    // Interrupt enabled

while(1);
}

/*****
/*    MCU Initialize Routine                                */
/*****/
void mcu_init(void) {
    prcr = 0x03;    // Protect register
                  // <PRC0> : Protect bit 0 (Enable write to CM0, CM1, CM2,
                  // ROCR, PLC0, PCLKR and CCLKR registers)
                  // <PRC1> : Protect bit 1 (Enable write to PM0, PM1, PM2,
                  // TB2SC, INVC0 and INVC1 registers)

    pm0 = 0x00;    // Processor mode register 0
                  // Single-chip mode

    pm1 = 0x08;    // Processor mode register 1
                  // <PM10> : Flash data block access bit (0: Disable)
                  // <PM17> : Wait bit (0: No wait state)

    wait_10ms();    // Waiting for main clock oscillation stable

    cm2 = 0x00;    // System clock select Main clock or PLL clock

    cm1 = 0x20;    // System clock control register 1
                  // <CM11> : System clock select bit 1 (0: Main clock)
                  // <CM15> : Xin-Xout drive capacity select bit (1: High)
                  // <CM17-16> : Main clock division select bits (00: No
                  // division mode)

    cm0 = 0x08;    // System clock control register 0
                  // <CM03> : Xcin-Xcout drive capacity select bit (1: High)
                  // <CM06> : Main clock division select bit 0 (0: CM16 and
                  // CM17 valid)
                  // <CM07> : Main clock division select bit 0 (0: Main clock,
                  // PLL clock, or on-chip oscillator clock)

    pclk_r = 0x03;    // Peripheral clock select register
                  // <PCLK0> : Timer A/B clock select bit (1: f1)
                  // <PCLK1> : SI/O clock select bit (1: f1SI0)

    prcr = 0x00;    // Protects registers
                  // Protect all registers

    #if PRODUCT_TYPE    // Product selection: 26A group
        ifsr2a = 1;    // Interrupt request cause select register2 IFSR2A
                  // <IFSR20> : Reserved bit (Must be set to "1")

        prcr = 0x04;    // Protect register off
        #if PIN_TYPE    // Port setting

```

```

        pacr = 0x01;    // 42pin type
    #else
        pacr = 0x04;    // 48pin type
    #endif
    prcr = 0x00;        // Protect register on
#else
    // Product selection: 28,29 group
    ifsr2a = 0;        // Interrupt request cause select register2 IFSR2A
    // <IFSR20> : Reserved bit (Must be set to "0")

    prcr = 0x04;        // Protect register off
    #if PIN_TYPE
        // Port setting
        pacr = 0x02;    // 64pin type
    #else
        pacr = 0x03;    // 80pin type
    #endif
    prcr = 0x00;        // Protect register on
#endif
}

/*****
/*    Main Clock Oscillation Stable Wait 10ms Routine    */
*****/
void wait_10ms(void) {
    ta0mr = 0x00;        // Set Timer A0 mode register (Timer mode, count source: f1)

    ta0 = 20000-1;        // Setting counter value (10msec @4MHz/2, f1)

    ta0ic = 0x00;        // Clear interrupt request bit

    tabsr = 0x01;        // Timer A0 start counting

    while (ir_ta0ic == 0){    }

    ir_ta0ic = 0;        // Clear interrupt request bit

    tabsr = 0x00;        // Timer A0 stops counting
}

/*****
/*    Timer B0 Initialize Routine    */
*****/
void timerB0_init(void) {
    tb0mr = 0x42;    // Timer B0 mode register
    // <TMOD1-0> : Operation mode select bit (10: Pulse period/pulse
    // width measurement mode)
    // <MR1-0> : Measurement mode select bit (00: Pulse period
    // measurement, measurement between a falling edge and the next
    // falling edge of measured pulse)
    // <MR2> : Must be set to "0" in pulse period and pulse width
    // measurement mode
    // <MR3> : Timer B0 overflow (0: Timer did not overflow)
    // <TCK1-0> : Count source select bit (01: f8)

    tb0ic = 0x03;    // Interrupt control register
    // <ILVL2-0> : Interrupt priority level (011: Level 3)
}

```

```

/*****
/*      Timer B0 Interrupt Program      */
/*****/
void tb0_int(void)
{
    // TB0 interrupt routine
}

```

如下所示，为使程序正常运行，需定义定时器 B0 的中断向量地址，使之指向中断服务程序。必须在启动文件“sect30.inc”的中断向量表中，定义定时器 B0 的中断程序地址“_tb0_int”。

序号为 26 的软件中断（定时器 B0 中断）

```

.glob _tb0_int
.lword _tb0_int ; timer B0(for user)(vector 26)

```

7. 参考文献

数据手册

M16C/26A（M16C/26A、M16C/26T）群硬件手册 Rev.1.00

M16C/28 群硬件手册 Rev.1.01

M16C/29 群硬件手册 Rev.1.00

（最新版本请从瑞萨科技网页上取得）

技术信息/技术更新

（最新信息请从瑞萨科技网页上取得）

公司主页和咨询窗口

瑞萨科技公司主页

<http://www.cn.renesas.com>

咨询

<http://www.renesas.com/inquiry>

修订记录

Rev.	发行日	修订内容	
		页	要点
1.00	2006.04.14	—	初版发行

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.
Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors.
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.

注意

本文只是参考译文，前页所载英文具有正式效力。

请遵循安全第一进行电路设计

1. 虽然瑞萨科技尽力提高半导体产品的质量和可靠性，但是半导体产品也可能发生故障。半导体的故障可能导致人身伤害、火灾事故以及财产损害。在电路设计时，请充分考虑安全性，采用合适的如冗余设计、利用非易燃材料以及故障或者事故防止等的安全设计方法。

关于利用本资料时的注意事项

1. 本资料是为了让用户根据用途选择合适的瑞萨科技产品的参考资料，不转让属于瑞萨科技或者第三者所有的知识产权和其它权利的许可。
2. 对于因使用本资料所记载的产品数据、图、表、程序、算法以及其它应用电路的例子而引起的损害或者对第三者的权力的侵犯，瑞萨科技不承担责任。
3. 本资料所记载的产品数据、图、表、程序、算法以及其它所有信息均为本资料发行时的信息，由于改进产品或者其它原因，本资料记载的信息可能变动，恕不另行通知。在购买本资料所记载的产品时，请预先向瑞萨科技或者经授权的瑞萨科技产品经销商确认最新信息。
本资料所记载的信息可能存在技术不准确或者印刷错误。因这些错误而引起的损害、责任问题或者其它损失，瑞萨科技不承担责任。
同时也请通过各种方式注意瑞萨科技公布的信息，包括瑞萨科技半导体网站。
(<http://www.renesas.com>)
4. 在使用本资料所记载部分或者全部数据、图、表、程序以及算法等信息时，在最终做出有关信息和产品是否适用的判断前，务必对作为整个系统的所有信息进行评价。由于本资料所记载的信息而引起的损害、责任问题或者其它损失，瑞萨科技不承担责任。
5. 瑞萨科技的半导体产品不是为在可能和人命相关的环境下使用的设备或者系统而设计和制造的产品。在研讨将本资料所记载的产品用于运输、机动车辆、医疗、航空宇宙用、原子能控制、海底中继器的设备或者系统等特殊用途时，请与瑞萨科技或者经授权的瑞萨产品经销商联系。
6. 未经瑞萨科技的书面许可，不得翻印或者复制全部或者部分资料的内容。
7. 如果本资料所记载的某产品或者技术内容受日本出口管理限制，必须在得到日本政府的有关部门许可后才能出口，并且不准进口到批准目的地国家以外的国家。
禁止违反日本和（或者）目的地国家的出口管理法和法规的任何转卖、挪用或者再出口。
8. 如果需要了解本资料所记载的信息或者产品的详细，请与瑞萨科技联系。