

Application Note

Simultaneous Dual Motor Control

AN-CM-323

Abstract

This application note describes the HVPAK configured as a controller for two brushed DC motors with independent control. The application note comes complete with design files which can be found in the Reference section.

Simultaneous Dual Motor Control

Contents

Abstract	1
Contents	2
Figures.....	2
Tables	2
1 Terms and Definitions.....	3
2 References	3
3 Introduction.....	4
4 Idea and Construction	4
5 Design Analysis.....	5
6 Circuit Analysis	6
7 Test Results	8
8 Conclusion.....	10
Revision History	11

Figures

Figure 1: Examples of Micro DC Motors	4
Figure 2: Schematic Representation of The Light Effect Machine	5
Figure 3: Design View	5
Figure 4: Control Blocks' Settings	6
Figure 5: Typical Application Circuit	7
Figure 6: Test Board Photos.....	7
Figure 7: Full View of the Light Effect Machine	8
Figure 8: Figures Created with The Light Effect Machine	9

Tables

Table 1: Motor Parameters.....	7
--------------------------------	---

Simultaneous Dual Motor Control

1 Terms and Definitions

PWM	Pulse width modulation
DC	Direct current
MCU	Microcontroller unit
HV	High voltage
GPO	General purpose output
LUT	Look up table
DFF	D flip-flop
OSC	Oscillator
IC	Integrated circuit
DLY	Delay
DC	Duty cycle
LED	Light emitting diode
VDD	Supply voltage
GND	Ground

2 References

For related documents and software, please visit:

<https://www.dialog-semiconductor.com/products/greenpak>

Download our free **GreenPAK** Designer software [1] to open the .gp files [2] and view the proposed circuit design. Use the **GreenPAK** development tools [3] to freeze the design into your own customized IC in a matter of minutes. Find out more in a complete library of application notes [4] featuring design examples as well as explanations of features and blocks within the GreenPAK IC.

- [1] [GreenPAK Designer Software](#), Software Download and User Guide
- [2] [AN-CM-323 Simultaneous Dual Motor Control.gp](#), **GreenPAK** Design File
- [3] [GreenPAK Development Tools](#), **GreenPAK** Development Tools Webpage
- [4] [GreenPAK Application Notes](#), **GreenPAK** Application Notes Webpage

Simultaneous Dual Motor Control

3 Introduction

DC electric motors are very widely used. Their popularity is due to their simple control and power supply. DC motors require only two poles, negative and positive, supplied from the source of electromotive force (EMF). When current passes through the DC motor's rotor coils, the shaft rotates. If you change the polarity, the direction of rotation will also change. It is also simple to control the velocity of the DC motor. There are many methods to do so—for example, changing the motor's supply voltage or using pulse-width modulation (PWM) signals.



Figure 1: Examples of Micro DC Motors

There is an incredibly wide range of applications for DC motors, even considering just those that are small in size and power consumption. Such motors are used in various tools and auxiliary equipment requiring precise mechanical movements. For example, DC motors are used in various position control systems of optical elements. It is also impossible to imagine modern children's toys without the use of various electric motors, such as models of cars and airplanes, helicopters or ships, and all possible types of robots. DC motors are also often used in Arduino projects. They rotate wheels, propellers, or robot manipulators, and move 3D printer cartridge cradles. It is also worth mentioning the indispensable role of DC motors in office equipment, position control systems for video surveillance systems, in servomotors for smart lock devices, personal and medical care devices, and other consumer electronics.

In order to ensure the correct and error-free use of DC motors in all these applications, it is necessary to meet a certain set of conditions required of a system that directly controls these motors. This Application Note uses the SLG47105 as an example of such a control system. The controller starts and stops the electric motor, changes the direction of rotation, smoothly adjusts the speed, and protects against emergency situations. Each of these functions can be performed simultaneously for two independent motors, which gives an additional advantage over existing solutions. An example light effect machine demonstrates the simplicity and ease of use of the SLG47105 to control two DC motors simultaneously and independently.

4 Idea and Construction

To demonstrate the concept of independent control of two motors, we'll use the example of a simple light machine which modulates a laser beam via two moving mirrors. The movement of the mirrors, specifically their rotation, is provided by two DC micro motors. Laser beam modulation is achieved by changing the speed and direction of rotation of the mirrors mounted on the shafts of these two motors.

Warning!

All necessary safety measures must be observed when working with laser radiation!



A point that performs two harmonic oscillations in two orthogonal directions forms an ellipse when the periods of both oscillations are equal. In more complex cases, the figures depend on the relation between the periods (frequencies), phases, and amplitudes of both oscillations. To obtain a full-size

Simultaneous Dual Motor Control

image of the figure (drawn by a variable laser point), the mirrors must have two directions of incidence of the beam: tangential reflection (at a slight angle of $\sim 1^\circ$) relative to the plane perpendicular to the motor axis and reflection at an angle of 45° relative to the beam. See Figure 2 for an illustration.

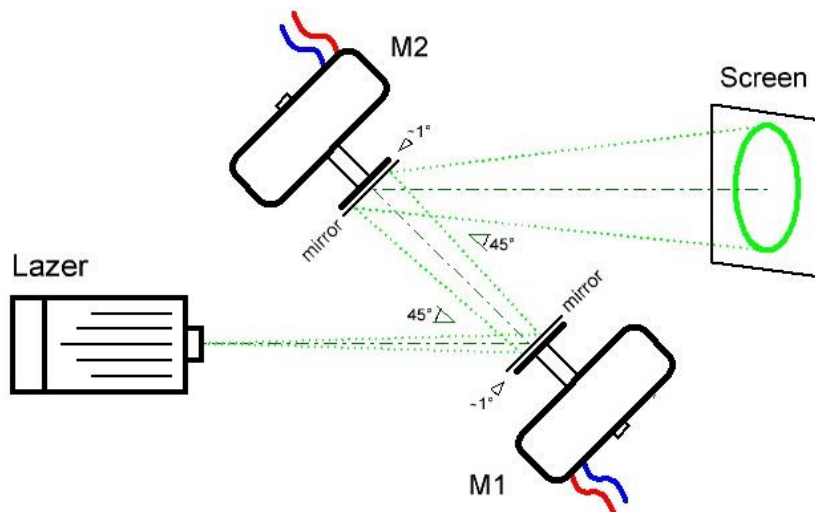


Figure 2: Schematic Representation of The Light Effect Machine

If such a modulated beam is projected onto a screen, you can create a wide variety of figures. The simple light effect machine was built in this way.

5 Design Analysis

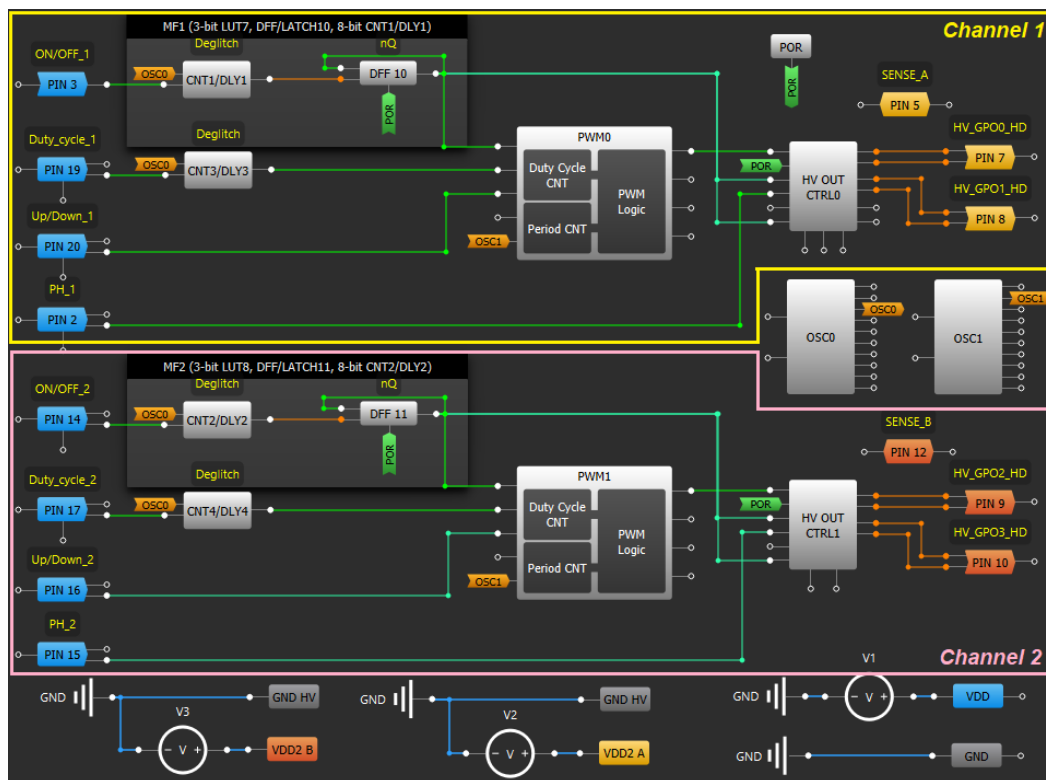


Figure 3: Design View

Simultaneous Dual Motor Control

In general, the design is made of two parts with identical functions. Channel 1 controls the M1 motor and Channel 2 controls the M2 motor (Figure 3). To ensure independent motor control, along with the additional possibility to change the direction of rotation, the “Full Bridge” mode was selected in the “HV out mode” option (see the “HV OUT CTRL” settings windows in Figure 4). The direction of rotation of micro motors can be changed with the help of external signals from switches, as seen in the electrical diagram (Figure 5). Speed is controlled by changing the value (from 0% to 100%) of the duty cycle of PWM signals forming the corresponding blocks (Figure 4).

The figure displays four configuration windows for the control blocks, arranged in a 2x2 grid. Each window has a green header bar with the block name: HV OUT CTRL0, PWM0, HV OUT CTRL1, and PWM1. The settings are as follows:

- HV OUT CTRL0:** Slew rate: Fast for pre-driver; HV OUT mode: Full bridge; Mode control: PH-EN; Thermal shutdown: Enable; OCP deglitch time enable: Without deglitch ti; Control delay of OCP0 retry: Delay 492 us; Control delay of OCP1 retry: Delay 492 us; VDD2A UVLO: Disable.
- PWM0:** PWM period: 295.8 us; PWM frequency: 3.38066 kHz; Resolution: 8-bit; Duty Cycle source: Duty Cycle CNT; Initial duty cycle value: 255; Initial duty cycle: 100.00 %; Duty Cycle CLK: Ext. Clk. (From matr); Keep/Stop mode: Keep; Continuous/Autostop: Autostop; Boundary OSC disable: OSC always ON; Sync reset (PD): Sync Pwr-Down; Deadband time: No Deadband; Phase Correct: Disable; OUT+ polarity: Non-inverted (OUT); OUT- polarity: Non-inverted (OUT); Period CLK: OSC1 Flex-Div; CLK frequency: 862.069 kHz.
- HV OUT CTRL1:** Slew rate: Fast for pre-driver; HV OUT mode: Full bridge; Mode control: PH-EN; Thermal shutdown: None; OCP deglitch time enable: Without deglitch ti; Control delay of OCP2 retry: Delay 492 us; Control delay of OCP3 retry: Delay 492 us; VDD2B UVLO: Disable.
- PWM1:** PWM period: 295.8 us; PWM frequency: 3.38066 kHz; Resolution: 8-bit; Duty Cycle source: Duty Cycle CNT; Initial duty cycle value: 255; Initial duty cycle: 100.00 %; Duty Cycle CLK: Ext. Clk. (From matr); Keep/Stop mode: Keep; Continuous/Autostop: Autostop; Boundary OSC disable: OSC always ON; Sync reset (PD): Sync Pwr-Down; Deadband time: No Deadband; Phase Correct: Disable; OUT+ polarity: Non-inverted (OUT); OUT- polarity: Non-inverted (OUT); Period CLK: OSC1 Flex-Div; CLK frequency: 862.069 kHz.

Figure 4: Control Blocks' Settings

Each motor is switched on and off by a corresponding external button (PIN#3 for Channel 1 and PIN#14 for Channel 2) which changes the state of the corresponding trigger each time it is pressed (DFF10 for Channel 1 and DFF11 for Channel 2). In addition, external buttons (PIN#19, PIN#20 for Channel 1; PIN#17, PIN#16 for Channel 2) are used to change the duty cycle of control PWM signals, that is, change the speed of rotation of the motors. In our case, this method of control was chosen using external signals from buttons and switches. If necessary, the design can be easily modified for control via the I2C interface.

6 Circuit Analysis

Figure 5 shows a schematic circuit diagram of the light effect machine. The total power supply of the circuit is 6V from the linear voltage stabilizer IC1. To rotate the mirrors, RF-300ca-09550-type DC micro motors are used. Their electrical characteristics are presented in Table 1.

Simultaneous Dual Motor Control

Table 1: Motor Parameters

RF-300CA-09550											
Voltage		No Load		At Maximum Efficiency					Stall		
Operating Range	Nominal	Speed	Current	Speed	Current	Torque		Output	Torque		Current
		r/min	mA	r/min	mA	mN·m	g·cm	w	mN·m	g·cm	
DC 1-6V	DC 3V	2700	0.012	2100	0.042	0.27	2.8	0.06	1.24	13	0.15

The light effect machine is controlled by four buttons and four switches (two switches and a button per channel). The buttons SB1 and SB3 are used to switch on/off the M1 and M2 motors, respectively (Figure 6). The switch SA1 sets the direction of rotation of the M1 motor, and the switch SA3 sets the direction of rotation of the M2 motor. The direction for changes of the duty cycle of PWM signal (speed increase or decrease) is selected using switches SA2 (motor M1) and SA4 (motor M2). Direct change of speed (change of duty cycle of PWM signal) per unit is carried out by signals from the buttons SB2 (motor M1) and SB4 (motor M2). The LED1 light indicates the power supply status to the entire system.


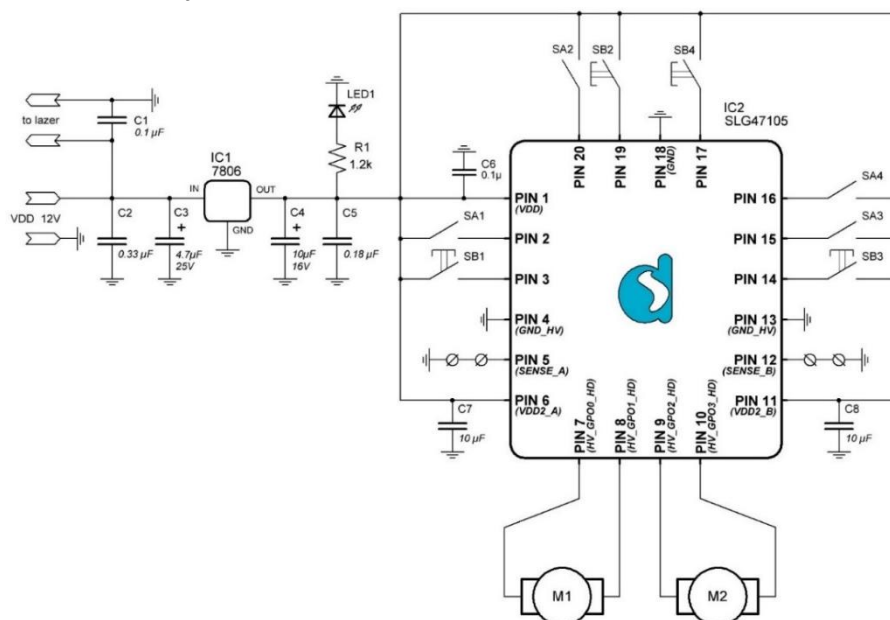


Figure 5: Typical Application Circuit



Bottom view

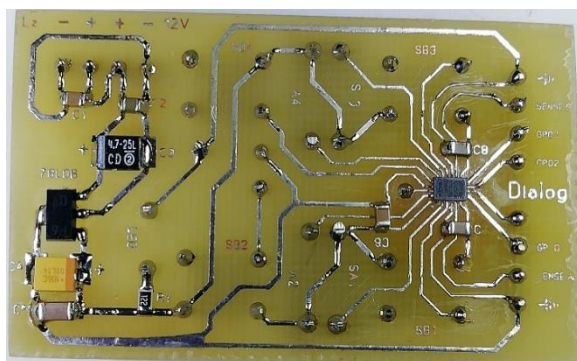

Top view

Figure 6: Test Board Photos

7 Test Results

The light effect machine is shown in [Figure 7](#). The following elements are mounted on a wooden base:

- Two motors rotating the mirrors
- Green radiation laser and its power supply module
- The motor control module made with the SLG47105 (shown in [Figure 6](#))
- In the process of testing, we changed the speed and direction of rotation of the motors, resulting in figures of different shapes and complexity ([Figure 8](#)).

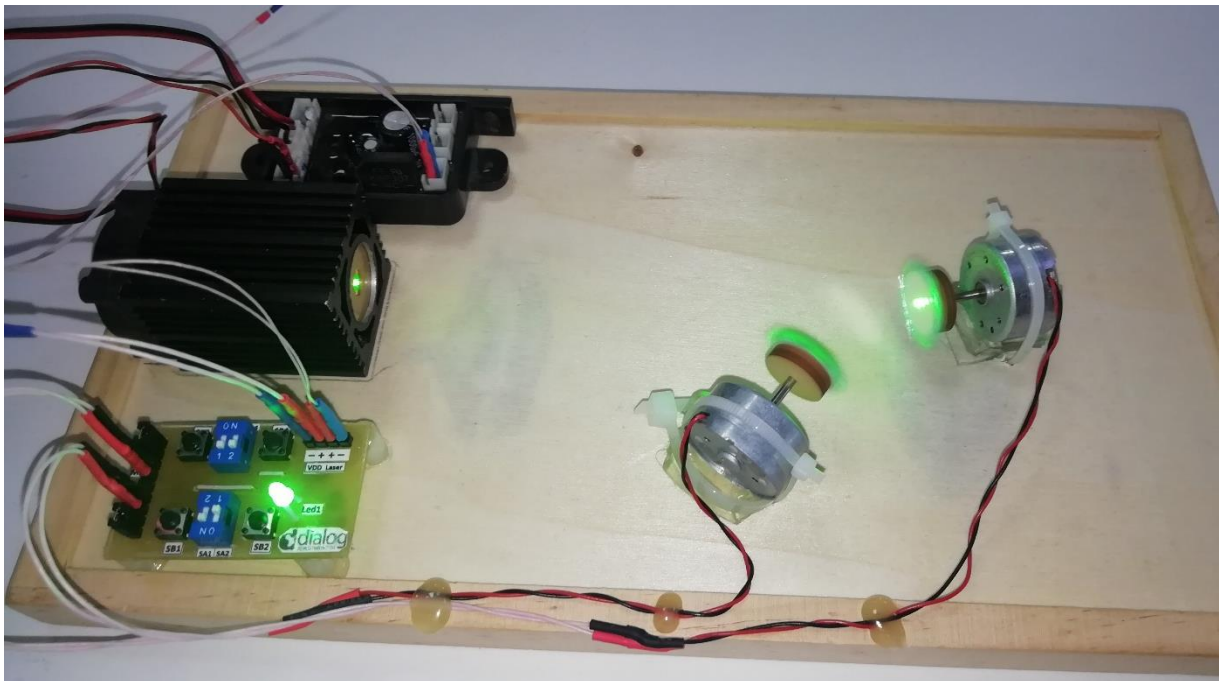


Figure 7: Full View of the Light Effect Machine

Simultaneous Dual Motor Control

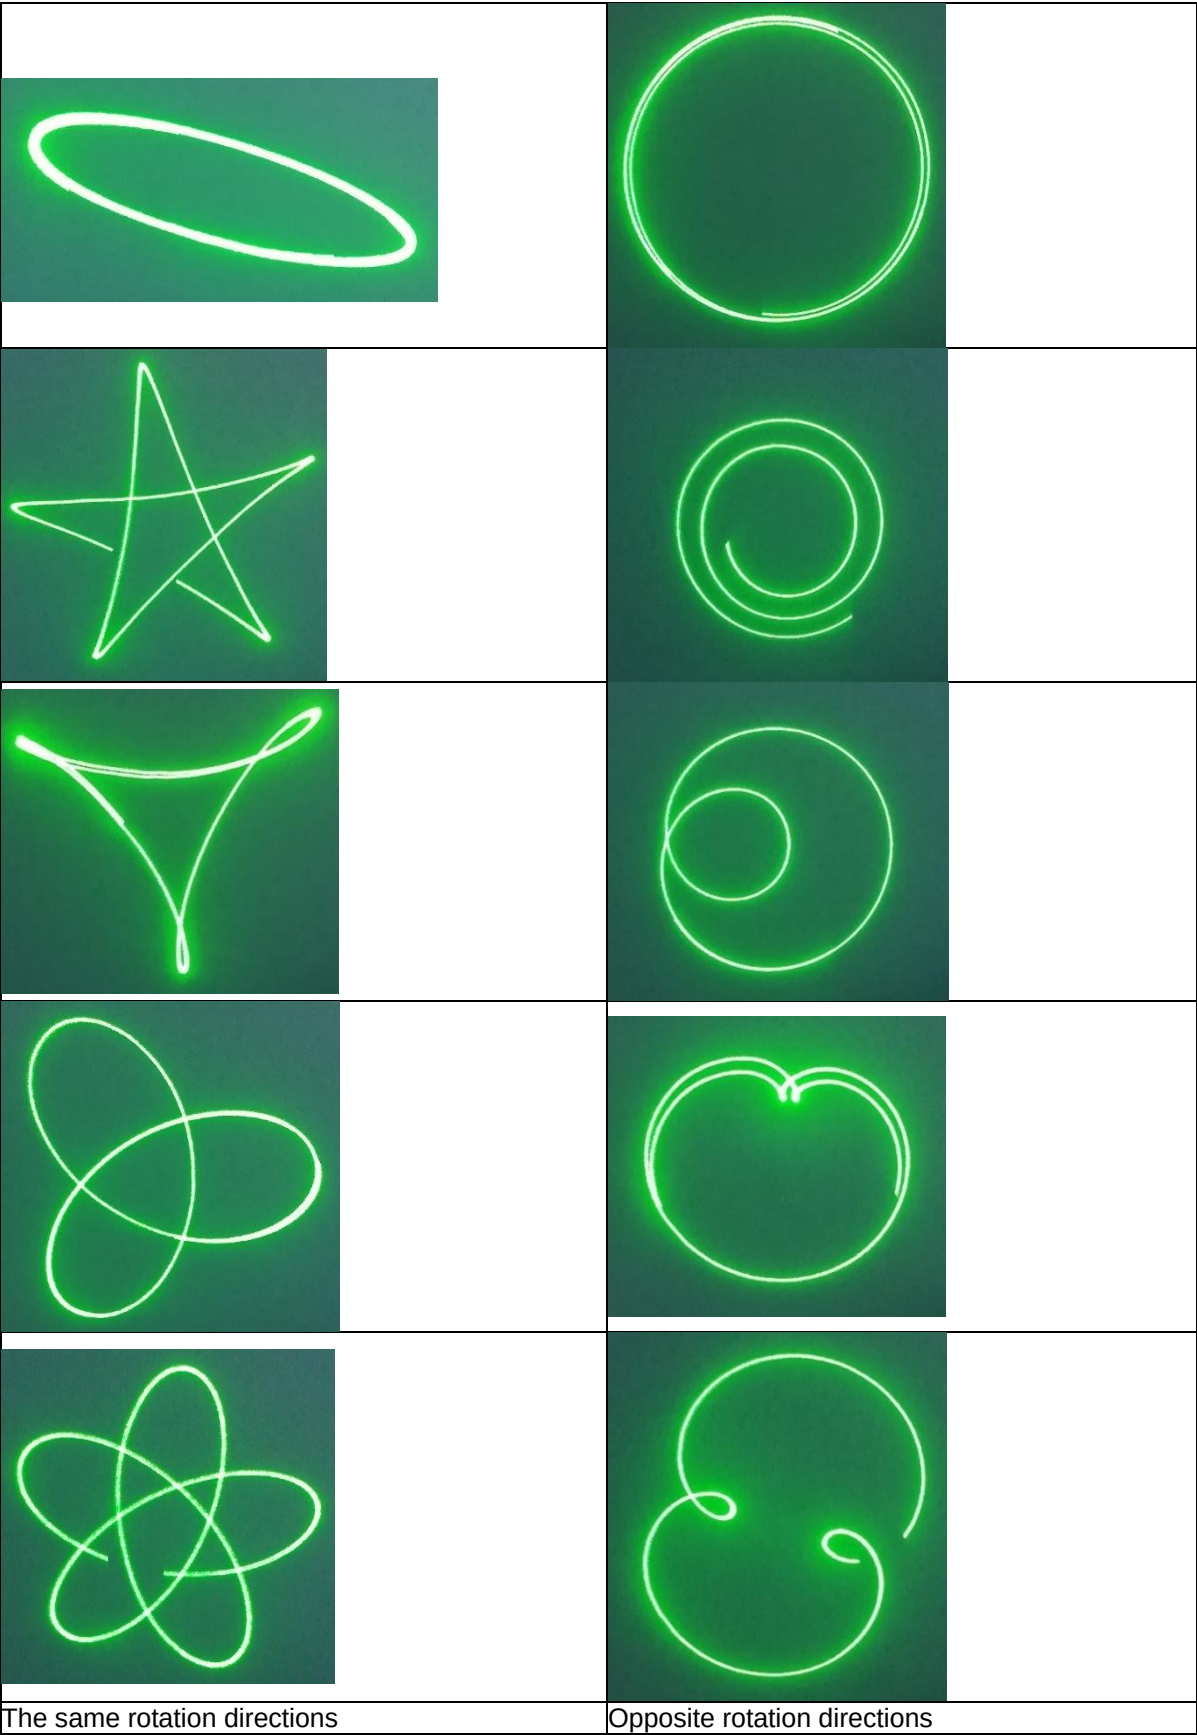


Figure 8: Figures Created with The Light Effect Machine.

8 Conclusion

This Application Note describes the HVPAK product SLG47105 configured and used as a driver for two brushed DC motors with independent control. The use of the HVPAK product in such an engineering solution turned out to be a very good choice. Thanks to its functional versatility, easy setup, and a large selection of internal resources, creating a design based on SLG47105 for specific applications is a fairly simple procedure. Low power consumption, small chip size, and low cost are additional advantages when choosing products. You can find an interesting application for the HVPAK on your own, as the full list of HVPAK possibilities is limited only by your imagination.

Simultaneous Dual Motor Control

Revision History

Revision	Date	Description
1.0	04-Oct-2021	Initial version