

## General Description


The 813N322I-02 device uses IDT's fourth generation FemtoClock® NG technology for optimal high clock frequency and low phase noise performance, combined with a low power consumption and high power supply noise rejection. The 813N322I-02 is a PLL based synchronous multiplier that is optimized for Ethernet to SONET/PDH clock jitter attenuation and frequency translation.

The 813N322I-02 is a fully integrated Phase Locked loop utilizing a FemtoClock NG Digital VCXO that provides the low jitter, high frequency SONET/PDH output clock that easily meets OC-48 jitter requirements. This VCXO technology simplifies PLL design by replacing the pullable crystal requirement of analog VCXOs with a fixed 27MHz generator crystal. Jitter attenuation down to 10Hz is provided by an external loop filter. Pre-divider and output divider multiplication ratios are selected using device selection control pins. The multiplication ratios are optimized to support most common clock rates used in PDH, SONET and Ethernet applications. The device requires the use of an external, inexpensive fundamental mode 27MHz crystal. The device is packaged in a space-saving 32-VFQFN package and supports industrial temperature range.

## Features

- Fourth Generation FemtoClock® NG technology
- Two LVPECL output pairs
- Each output supports independent frequency selection at 19.44MHz, 77.76MHz, 155.52MHz and 622.08MHz
- Two differential inputs support the following input types: LVPECL, LVDS, LVHSTL, HCSL
- Accepts input frequencies from 8kHz to 156.25MHz including 8kHz, 19.44MHz, 25MHz, 62.5MHz, 77.76MHz, 125MHz, 155.52MHz and 156.25MHz
- Crystal interface designed for a 27MHz, 10pF parallel resonant crystal
- Attenuates the phase jitter of the input clock by using a low-cost fundamental mode crystal
- Customized settings for jitter attenuation and reference tracking using an external loop filter connection
- FemtoClock NG frequency multiplier provides low jitter, high frequency output
- Absolute pull range:  $\pm 50\text{ppm}$
- Power supply noise rejection (PSNR): -95dB (typical)
- FemtoClock NG VCXO frequency: 2488.32MHz
- RMS phase jitter @ 155.52MHz, using a 27MHz crystal (12kHz – 20MHz): 0.674ps (typical)
- 3.3V supply voltage
- -40°C to 85°C ambient operating temperature
- Available in lead-free (RoHS 6) package

## Pin Assignment

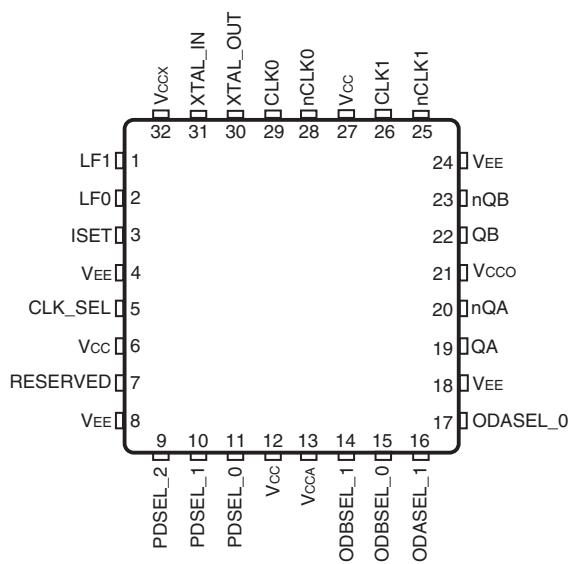

813N322I-02


32 Lead VFQFN

5mm x 5mm x 0.925mm package body

K Package

Top View

## Block Diagram

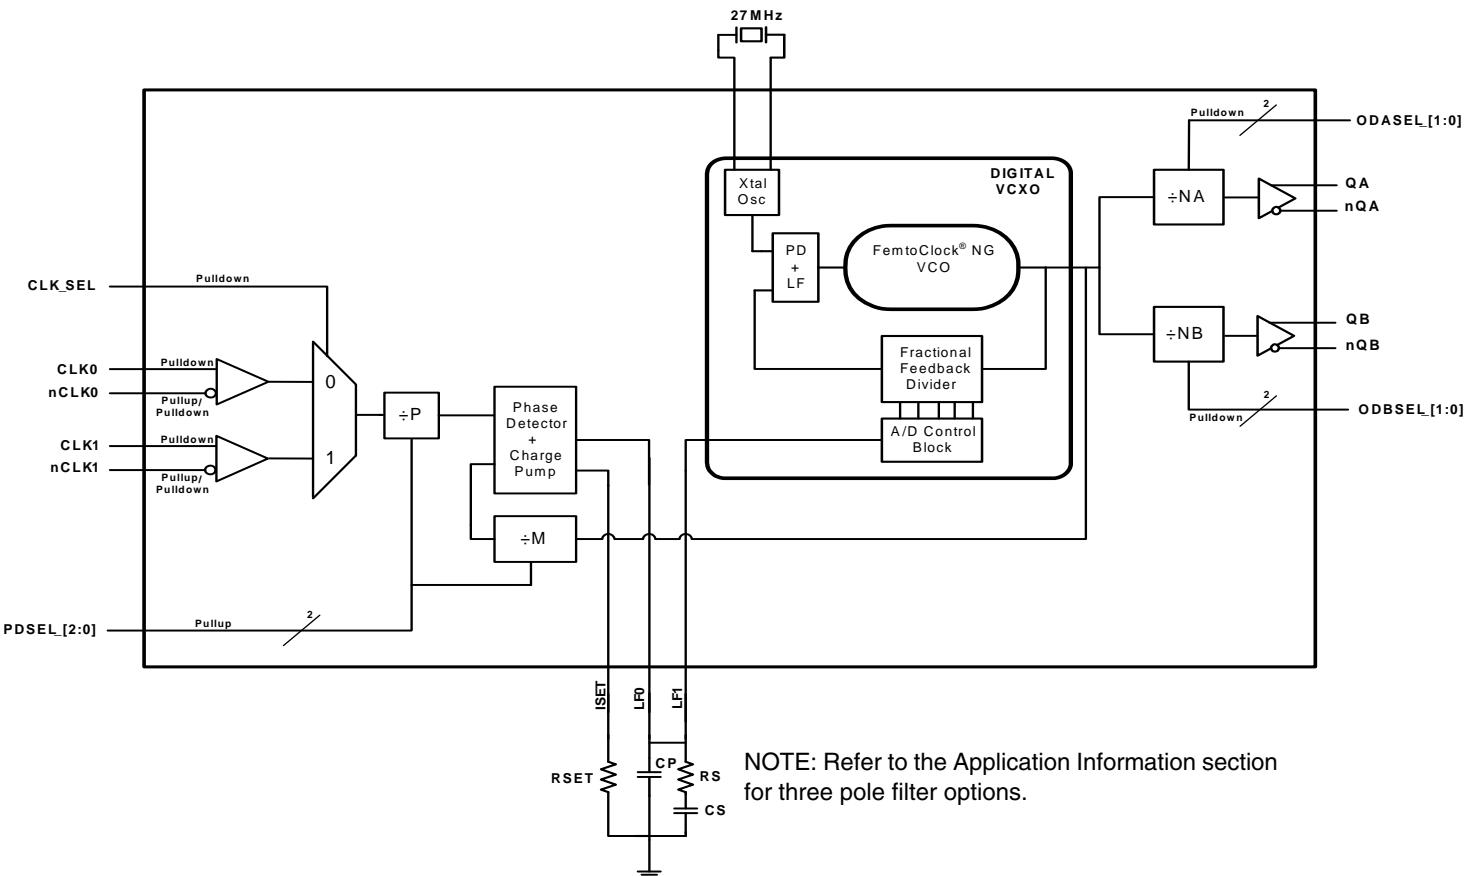

## Pin Description and Pin Characteristic Tables

Table 1. Pin Descriptions

| Number          | Name                            | Type                |                     | Description  |
|-----------------|---------------------------------|---------------------|---------------------|--|
| 1, 2            | LF1, LF0                        | Analog Input/Output |                     | Loop filter connection node pins. LF0 is the output. LF1 is the input.   |
| 3               | ISET                            | Analog Input/Output |                     | Charge pump current setting pin.   |
| 4, 8, 18, 24    | V <sub>EE</sub>                 | Power               |                     | Negative supply pins.  |
| 5               | CLK_SEL                         | Input               | Pulldown            | Input clock select. When HIGH selects CLK1, nCLK1. When LOW, selects CLK0, nCLK0. LVCMOS / LVTTL interface levels. |
| 6, 12, 27       | V <sub>CC</sub>                 | Power               |                     | Core supply pins.  |
| 7               | RESERVED                        | Reserve             |                     | Reserve pin.   |
| 9,<br>10,<br>11 | PDSEL_2,<br>PDSEL_1,<br>PDSEL_0 | Input               | Pullup              | Pre-divider select pins. LVCMOS/LVTTL interface levels.<br>See Table 3A.   |
| 13              | V <sub>CCA</sub>                | Power               |                     | Analog supply pin.   |
| 14,<br>15       | ODBSEL_1,<br>ODBSEL_0           | Input               | Pulldown            | Frequency select pins for Bank B output. See Table 3B.<br>LVCMOS/LVTTL interface levels.                           |
| 16,<br>17       | ODASEL_1,<br>ODASEL_0           | Input               | Pulldown            | Frequency select pins for Bank A output. See Table 3B.<br>LVCMOS/LVTTL interface levels.                           |
| 19, 20          | QA, nQA                         | Output              |                     | Differential Bank A clock outputs. LVPECL interface levels.  |
| 21              | V <sub>CCO</sub>                | Power               |                     | Output supply pin.   |
| 22, 23          | QB, nQB                         | Output              |                     | Differential Bank B clock outputs. LVPECL interface levels.  |
| 25              | nCLK1                           | Input               | Pullup/<br>Pulldown | Inverting differential clock input. V <sub>CC</sub> /2 bias voltage when left floating.                            |
| 26              | CLK1                            | Input               | Pulldown            | Non-inverting differential clock input.  |
| 28              | nCLK0                           | Input               | Pullup/<br>Pulldown | Inverting differential clock input. V <sub>CC</sub> /2 bias voltage when left floating.                            |
| 29              | CLK0                            | Input               | Pulldown            | Non-inverting differential clock input.  |
| 30,<br>31       | XTAL_OUT,<br>XTAL_IN            | Input               |                     | Crystal oscillator interface. XTAL_IN is the input. XTAL_OUT is the output.  |
| 32              | V <sub>CCX</sub>                | Power               |                     | Power supply pin for the crystal oscillator  |

NOTE: *Pullup* and *Pulldown* refer to internal input resistors. See Table 2, *Pin Characteristics*, for typical values.

Table 2. Pin Characteristics

| Symbol                | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------------|-------------------------|-----------------|---------|---------|---------|-------|
| C <sub>IN</sub>       | Input Capacitance       |                 |         | 3.5     |         | pF    |
| R <sub>PULLUP</sub>   | Input Pullup Resistor   |                 |         | 51      |         | kΩ    |
| R <sub>PULLDOWN</sub> | Input Pulldown Resistor |                 |         | 51      |         | kΩ    |

## Function Tables

Table 3A. Pre-Divider Selection Function Table

| Inputs  |         |         | $\div P$ Value  |
|---------|---------|---------|-----------------|
| PDSEL_2 | PDSEL_1 | PDSEL_0 |                 |
| 0       | 0       | 0       | 1               |
| 0       | 0       | 1       | 1944            |
| 0       | 1       | 0       | 2500            |
| 0       | 1       | 1       | 6250            |
| 1       | 0       | 0       | 7776            |
| 1       | 0       | 1       | 12500           |
| 1       | 1       | 0       | 15552           |
| 1       | 1       | 1       | 15625 (default) |

Table 3B. Output Divider Function Table

| Inputs   |          | $\div Nx$ Value |
|----------|----------|-----------------|
| ODxSEL_1 | ODxSEL_0 |                 |
| 0        | 0        | 128 (default)   |
| 0        | 1        | 32              |
| 1        | 0        | 16              |
| 1        | 1        | 4               |

NOTE: x denotes A or B.

Table 3C. Example Configurations for Selected Output and Input Frequencies

| User Configuration and Frequencies |                        |             |              | Internal Divider Values and Frequencies |                    |   |   |                   |
|------------------------------------|------------------------|-------------|--------------|---|--------------------|---|---|-------------------|
| Input Frequency (MHz)              | Output Frequency (MHz) | PDSEL [2:0] | ODxSEL [1:0] | Pre-Divider P                           | Feedback Divider M | Fractional Feedback Divider FemtoClock NG | FemtoClock NG VCXO Center Frequency (MHz) | Output Divider Nx |
| 0.008                              | 19.44                  | 000         | 00           | 1                                       | 128                | 2430                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |
| 19.44                              | 19.44                  | 001         | 00           | 1944                                    | 128                | 1944                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |
| 25                                 | 19.44                  | 010         | 00           | 2500                                    | 128                | 1944                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |
| 62.5                               | 19.44                  | 011         | 00           | 6250                                    | 128                | 1944                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |
| 77.76                              | 19.44                  | 100         | 00           | 7776                                    | 128                | 1944                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |
| 125                                | 19.44                  | 101         | 00           | 12500                                   | 128                | 1944                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |
| 155.52                             | 19.44                  | 110         | 00           | 15552                                   | 128                | 1944                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |
| 156.25                             | 19.44                  | 111         | 00           | 15625                                   | 128                | 1944                                      | 2488.32                                   | 128               |
|                                    | 77.76                  |             | 01           |   |                    |   |   | 32                |
|                                    | 155.52                 |             | 10           |   |                    |   |   | 16                |
|                                    | 622.08                 |             | 11           |   |                    |   |   | 4                 |

NOTE: ODxSEL denotes ODASEL or ODBSEL.

## Absolute Maximum Ratings

NOTE: Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

| Item  | Rating                               |
|---|--------------------------------------|
| Supply Voltage, $V_{CC}$                              | 3.63V                                |
| Inputs, $V_I$<br>XTAL_IN<br>Other Inputs              | 0V to 2V<br>-0.5V to $V_{CC} + 0.5V$ |
| Outputs, $I_O$<br>Continuous Current<br>Surge Current | 50mA<br>100mA                        |
| Package Thermal Impedance, $\theta_{JA}$              | 33.1°C/W (0 mps)                     |
| Storage Temperature, $T_{STG}$                        | -65°C to 150°C                       |

## DC Electrical Characteristics

**Table 4A. LVPECL Power Supply DC Characteristics,  $V_{CC} = V_{CCO} = V_{CCX} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol    | Parameter                  | Test Conditions | Minimum         | Typical | Maximum  | Units |
|-----------|----------------------------|-----------------|-----------------|---------|----------|-------|
| $V_{CC}$  | Core Supply Voltage        |                 | 3.135           | 3.3     | 3.465    | V     |
| $V_{CCA}$ | Analog Supply Voltage      |                 | $V_{CC} - 0.30$ | 3.3     | $V_{CC}$ | V     |
| $V_{CCO}$ | Output Supply Voltage      |                 | 3.135           | 3.3     | 3.465    | V     |
| $V_{CCX}$ | Charge Pump Supply Voltage |                 | 3.135           | 3.3     | 3.465    | V     |
| $I_{EE}$  | Power Supply Current       |                 |                 |         | 274      | mA    |
| $I_{CCA}$ | Analog Supply Current      |                 |                 |         | 30       | mA    |

**Table 4B. LVC MOS/LV TTL DC Characteristics,  $V_{CC} = V_{CCO} = V_{CCX} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol   | Parameter          | Test Conditions                           | Minimum                           | Typical | Maximum        | Units   |
|----------|--------------------|---|-----------------------------------|---------|----------------|---------|
| $V_{IH}$ | Input High Voltage |   | 2                                 |         | $V_{CC} + 0.3$ | V       |
| $V_{IL}$ | Input Low Voltage  |   | -0.3                              |         | 0.8            | V       |
| $I_{IH}$ | Input High Current | CLK_SEL,<br>ODASEL_[1:0],<br>ODBSEL_[1:0] | $V_{CC} = V_{IN} = 3.465V$        |         | 150            | $\mu A$ |
|          |                    | PDSEL_[2:0]                               | $V_{CC} = V_{IN} = 3.465V$        |         | 10             | $\mu A$ |
| $I_{IL}$ | Input Low Current  | CLK_SEL,<br>ODASEL_[1:0],<br>ODBSEL_[1:0] | $V_{CC} = 3.465V$ , $V_{IN} = 0V$ | -10     |                | $\mu A$ |
|          |                    | PDSEL_[2:0]                               | $V_{CC} = 3.465$ , $V_{IN} = 0V$  | -150    |                | $\mu A$ |

**Table 4C. Differential DC Characteristics,  $V_{CC} = V_{CCO} = V_{CCX} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$** 

| Symbol    | Parameter                         | Test Conditions                | Minimum  | Typical | Maximum         | Units   |
|-----------|-----------------------------------|--------------------------------|----------|---------|-----------------|---------|
| $I_{IH}$  | Input High Current                | $V_{CC} = V_{IN} = 3.465V$     |          |         | 150             | $\mu A$ |
| $I_{IL}$  | Input Low Current                 | $V_{CC} = 3.465V, V_{IN} = 0V$ | -10      |         |                 | $\mu A$ |
|           |                                   | $V_{CC} = 3.465V, V_{IN} = 0V$ | -150     |         |                 | $\mu A$ |
| $V_{PP}$  | Peak-to-Peak Input Voltage        |                                | 0.15     |         | 1.3             | V       |
| $V_{CMR}$ | Common Mode Input Voltage; NOTE 1 |                                | $V_{EE}$ |         | $V_{CC} - 0.85$ | V       |

NOTE 1. Common mode voltage is defined at the cross point.

**Table 4D. LVPECL DC Characteristics,  $V_{CC} = V_{CCO} = V_{CCX} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$** 

| Symbol      | Parameter                         | Test Conditions | Minimum          | Typical | Maximum          | Units |
|-------------|-----------------------------------|-----------------|------------------|---------|------------------|-------|
| $V_{OH}$    | Output High Voltage; NOTE 1       |                 | $V_{CCO} - 1.10$ |         | $V_{CCO} - 0.75$ | V     |
| $V_{OL}$    | Output Low Voltage; NOTE 1        |                 | $V_{CCO} - 2.0$  |         | $V_{CCO} - 1.6$  | V     |
| $V_{SWING}$ | Peak-to-Peak Output Voltage Swing |                 | 0.6              |         | 1.0              | V     |

NOTE 1: Outputs terminated with  $50\Omega$  to  $V_{CCO} - 2V$ . See Parameter Measurement Information section, *3.3V Output Load Test Circuit*.

## AC Electrical Characteristics

**Table 5. AC Characteristics,  $V_{CC} = V_{CCO} = V_{CCX} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$**

| Symbol                  | Parameter                               | Test Conditions  | Minimum | Typical | Maximum | Units |
|-------------------------|---|--|---------|---------|---------|-------|
| $f_{IN}$                | Input Frequency                         |  | 0.008   |         | 156.25  | MHz   |
| $f_{OUT}$               | Output Frequency                        |  | 19.44   |         | 622.08  | MHz   |
| $t_{jitter}(\emptyset)$ | RMS Phase Jitter, (Random),<br>NOTE 1   | 77.76MHz $f_{OUT}$ , 27MHz crystal,<br>Integration Range: 12kHz – 20MHz  |         | 0.823   | 0.951   | ps    |
|                         |   | 155.52MHz $f_{OUT}$ , 27MHz crystal,<br>Integration Range: 12kHz – 20MHz |         | 0.674   | 0.788   | ps    |
|                         |   | 622.08MHz $f_{OUT}$ , 27MHz crystal,<br>Integration Range: 12kHz – 20MHz |         | 0.616   | 0.736   | ps    |
| $t_{sk(o)}$             | Output Skew; NOTE 2, 3                  |  |         |         | 50      | ps    |
| $t_R / t_F$             | Output Rise/Fall Time                   | 20% to 80%   | 100     |         | 450     | ps    |
| $odc$                   | Output Duty Cycle                       |  | 48      |         | 52      | %     |
| PSNR                    | Power Supply Noise Rejection; NOTE 4    | VPP = 50mV Sine Wave,<br>Integration Range: 10kHz - 10MHz                |         | -95     |         | dB    |
| $t_{LOCK}$              | Output-to-Input Phase Lock Time; NOTE 5 | Reference Clock Input is $\pm 50\text{ppm}$ from Nominal Frequency       |         | 3       |         | s     |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

NOTE: Characterized with outputs at the same frequency using the loop filter components for the 44Hz loop bandwidth.

Refer to Jitter Attenuator Loop Bandwidth Selection Table.

NOTE 1: Refer to the Phase Noise Plot.


NOTE 2: This parameter is defined in accordance with JEDEC Standard 65.

NOTE 3: Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at the output differential cross points.


NOTE 4: PSNR results achieved by injecting noise on  $V_{CCA}$  supply pin with no external filter network.

NOTE 5: Lock Time measured from power-up to stable output frequency.


## Typical Phase Noise at 155.52MHz

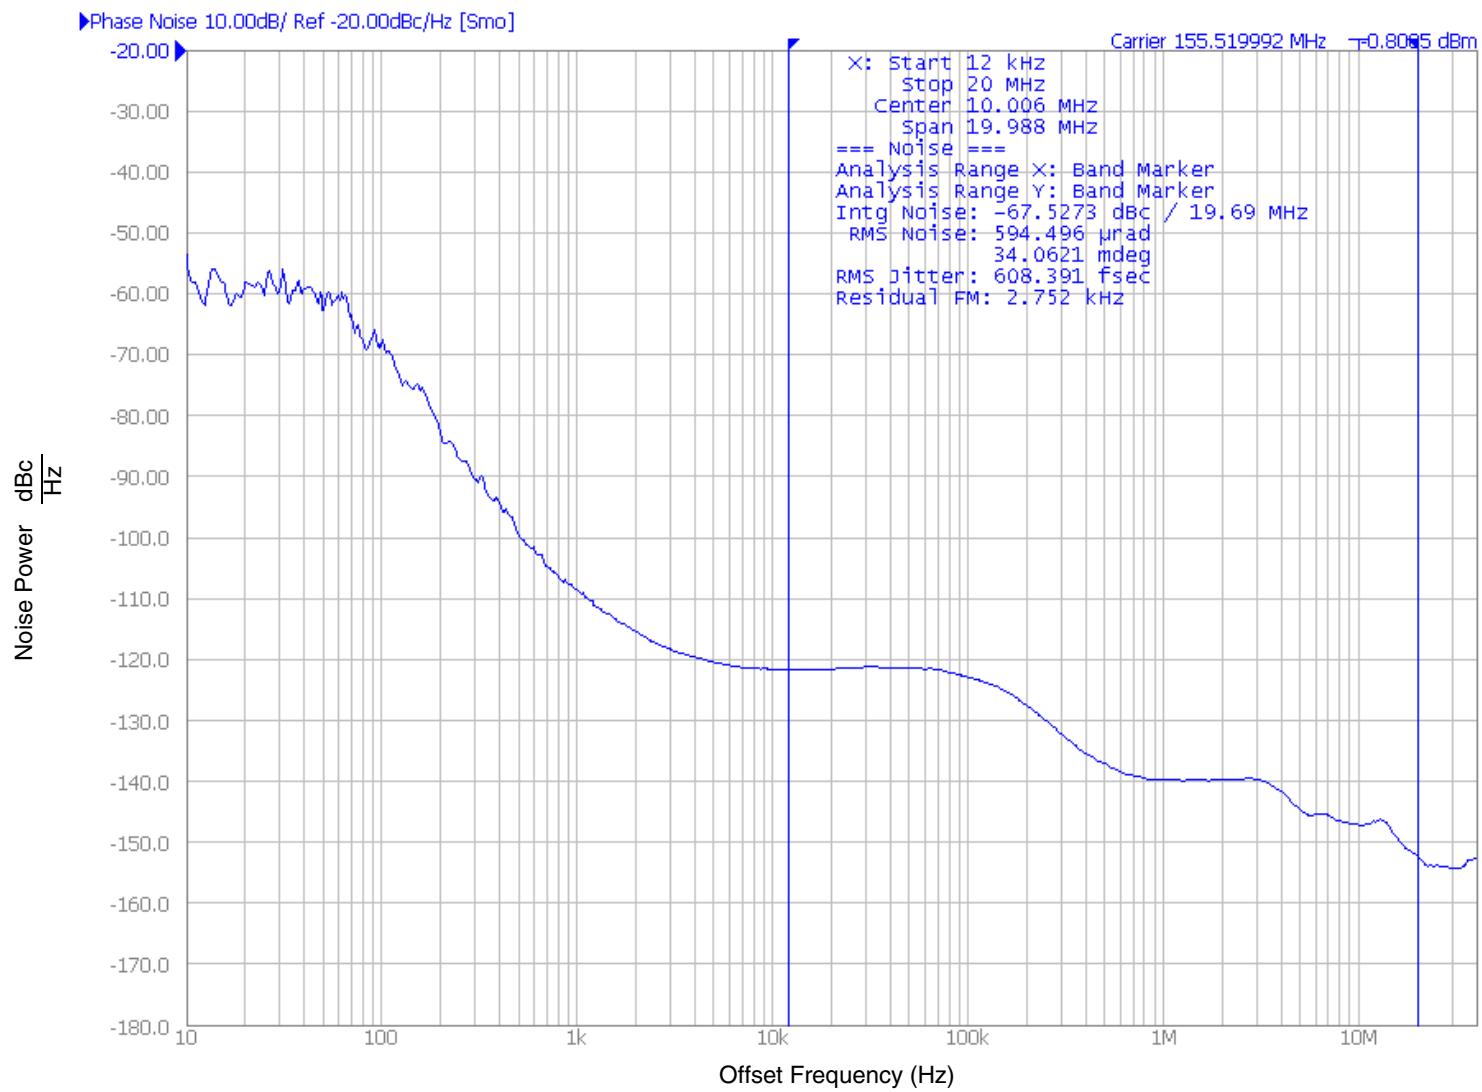


## Parameter Measurement Information

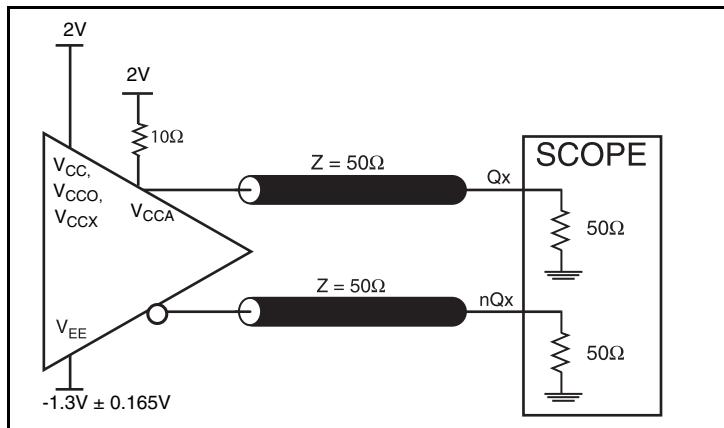


**3.3V LVPECL Output Load AC Test Circuit**

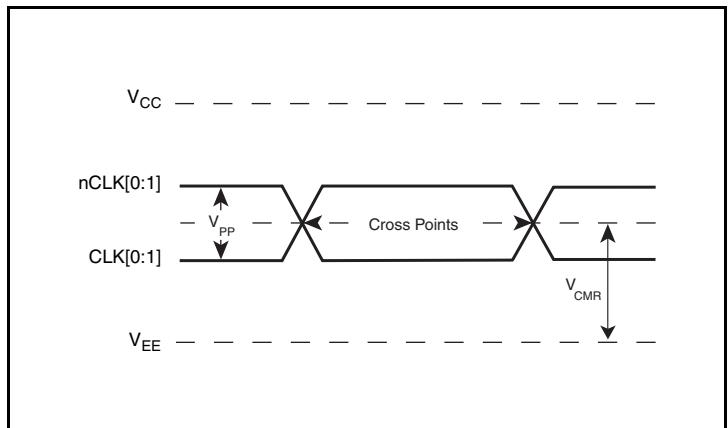


**Differential Input Level**

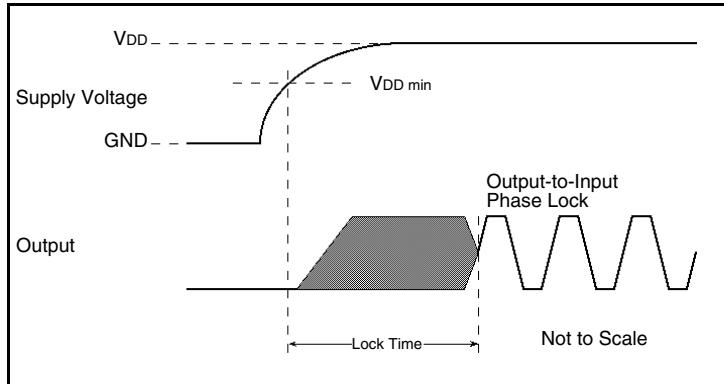


**Output-to-Input Phase Lock Time**

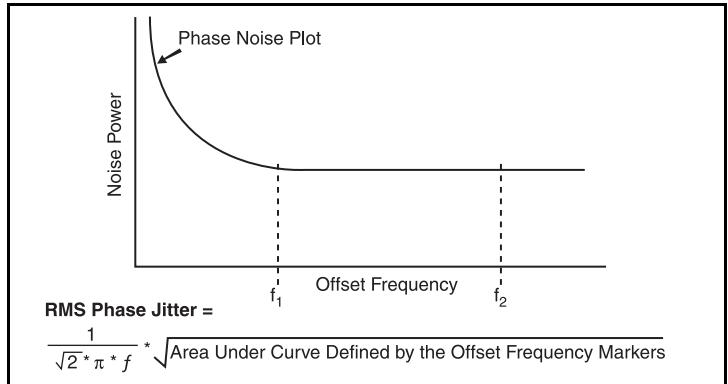


**RMS Phase Jitter**

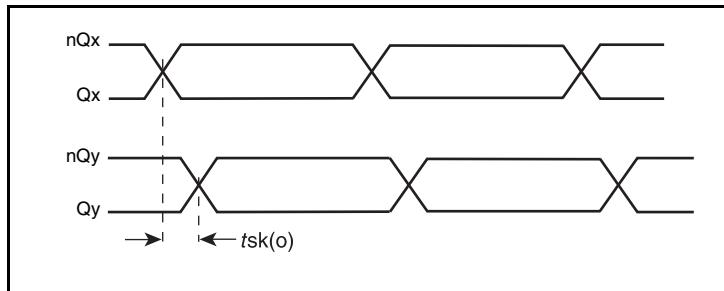

**Output Skew**

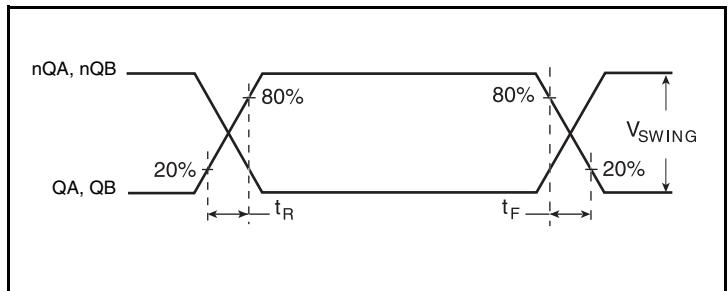

**LVPECL Output Rise/Fall Time**

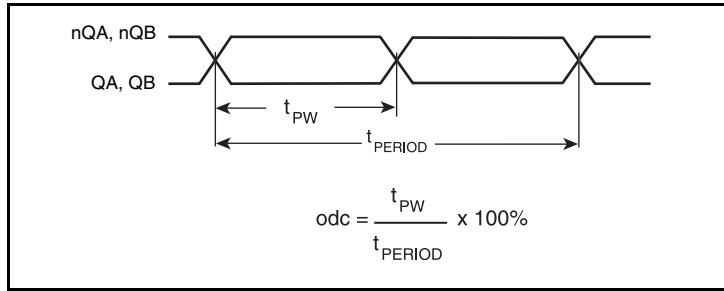

**Output Duty Cycle/Pulse Width/Period**

## Applications Information

### Wiring the Differential Input to Accept Single-Ended Levels

Figure 1 shows how a differential input can be wired to accept single ended levels. The reference voltage  $V_1 = V_{CC}/2$  is generated by the bias resistors R1 and R2. The bypass capacitor (C1) is used to help filter noise on the DC bias. This bias circuit should be located as close to the input pin as possible. The ratio of R1 and R2 might need to be adjusted to position the  $V_1$  in the center of the input voltage swing. For example, if the input clock swing is 2.5V and  $V_{CC} = 3.3V$ , R1 and R2 value should be adjusted to set  $V_1$  at 1.25V. The values below are for when both the single ended swing and  $V_{CC}$  are at the same voltage. This configuration requires that the sum of the output impedance of the driver ( $R_o$ ) and the series resistance ( $R_s$ ) equals the transmission line impedance. In addition, matched termination at the input will attenuate the signal in half. This can be done in one of two ways. First, R3 and R4 in parallel should equal the transmission line

impedance. For most  $50\Omega$  applications, R3 and R4 can be  $100\Omega$ . The values of the resistors can be increased to reduce the loading for slower and weaker LVCMS driver. When using single-ended signaling, the noise rejection benefits of differential signaling are reduced. Even though the differential input can handle full rail LVCMS signaling, it is recommended that the amplitude be reduced. The datasheet specifies a lower differential amplitude, however this only applies to differential signals. For single-ended applications, the swing can be larger, however  $V_{IL}$  cannot be less than  $-0.3V$  and  $V_{IH}$  cannot be more than  $V_{CC} + 0.3V$ . Though some of the recommended components might not be used, the pads should be placed in the layout. They can be utilized for debugging purposes. The datasheet specifications are characterized and guaranteed by using a differential signal.


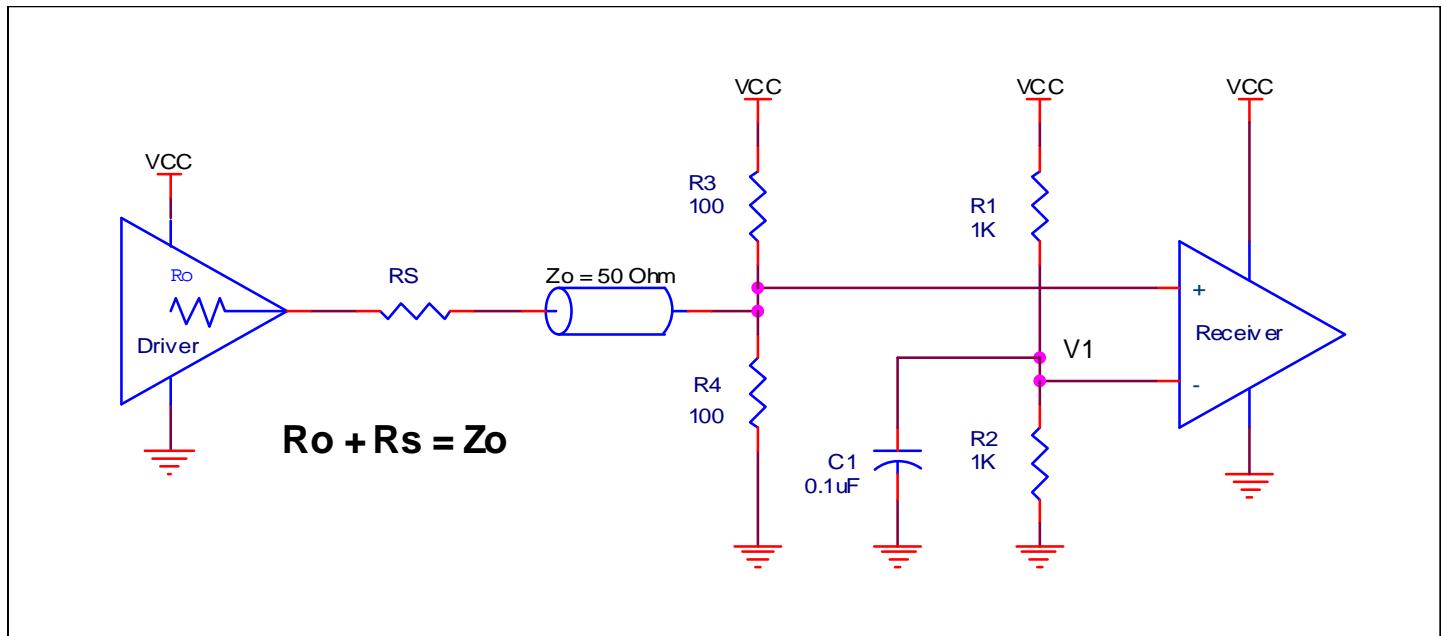


Figure 1. Recommended Schematic for Wiring a Differential Input to Accept Single-ended Levels


## Differential Clock Input Interface

The CLK /nCLK accepts LVDS, LVPECL, LVHSTL, HCSL and other differential signals. Both  $V_{SWING}$  and  $V_{OH}$  must meet the  $V_{PP}$  and  $V_{CMR}$  input requirements. Figures 2A to 2E show interface examples for the CLK/nCLK input driven by the most common driver types. The input interfaces suggested here are examples only. Please consult


with the vendor of the driver component to confirm the driver termination requirements. For example, in Figure 3A, the input termination applies for IDT open emitter LVHSTL drivers. If you are using an LVHSTL driver from another vendor, use their termination recommendation.

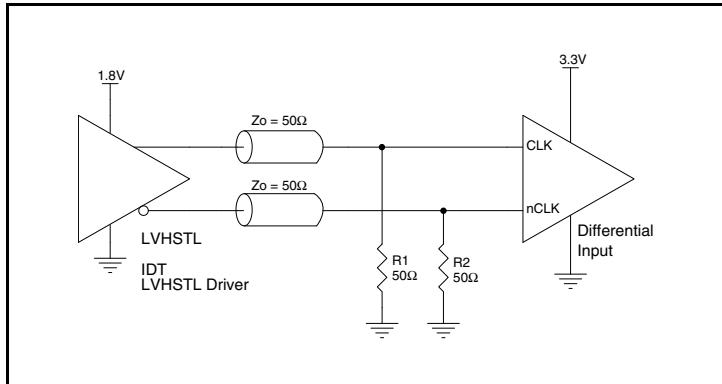


**Figure 2A. CLK/nCLK Input Driven by an IDT Open Emitter LVHSTL Driver**

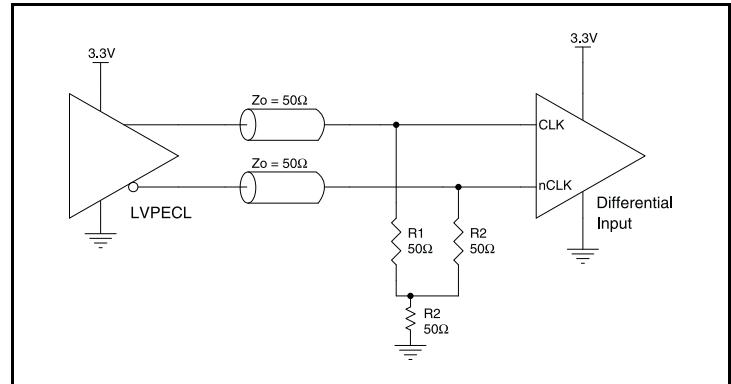


**Figure 2B. CLK/nCLK Input Driven by a 3.3V LVPECL Driver**

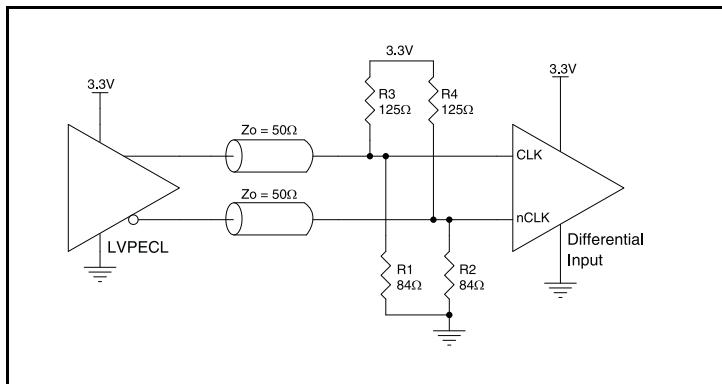

**Figure 2C. CLK/nCLK Input Driven by a 3.3V LVPECL Driver**

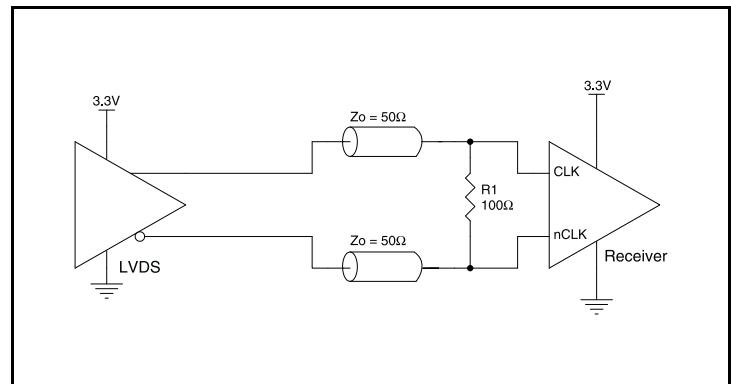

**Figure 2D. CLK/nCLK Input Driven by a 3.3V LVDS Driver**

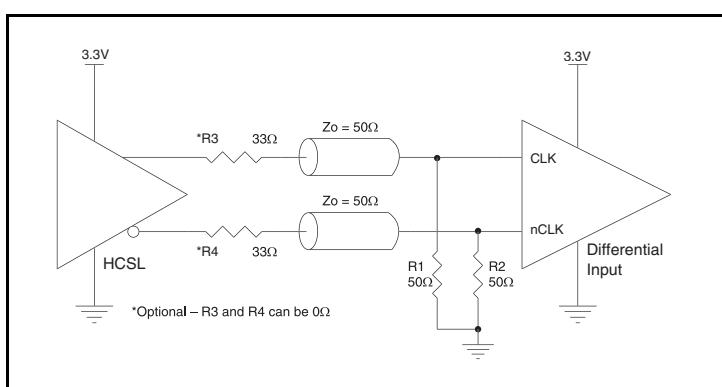

**Figure 2E. CLK/nCLK Input Driven by a 3.3V HCSL Driver**

## Recommendations for Unused Input and Output Pins

## Inputs:

## CLK/nCLK Inputs

For applications not requiring the use of the differential input, both CLK and nCLK can be left floating. Though not required, but for additional protection, a  $1\text{k}\Omega$  resistor can be tied from CLK to ground.

## LVC MOS Control Pins

All control pins have internal pullups or pulldowns; additional resistance is not required but can be added for additional protection. A  $1\text{k}\Omega$  resistor can be used.

## Outputs:

## LVPECL Outputs


All unused LVPECL outputs can be left floating. We recommend that there is no trace attached. Both sides of the differential output pair should either be left floating or terminated.

## Termination for 3.3V LVPECL Outputs


The clock layout topology shown below is a typical termination for LVPECL outputs. The two different layouts mentioned are recommended only as guidelines.

The differential outputs are low impedance follower outputs that generate ECL/LVPECL compatible outputs. Therefore, terminating resistors (DC current path to ground) or current sources must be used for functionality. These outputs are designed to drive  $50\Omega$

transmission lines. Matched impedance techniques should be used to maximize operating frequency and minimize signal distortion. Figures 3A and 3B show two different layouts which are recommended only as guidelines. Other suitable clock layouts may exist and it would be recommended that the board designers simulate to guarantee compatibility across all printed circuit and clock component process variations.

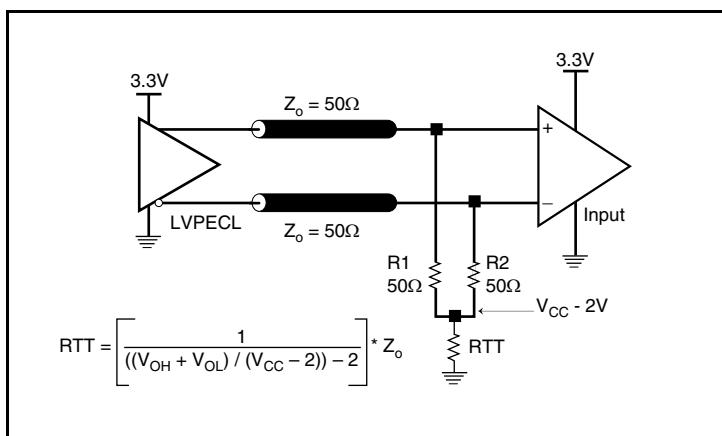

**Figure 3A. 3.3V LVPECL Output Termination**

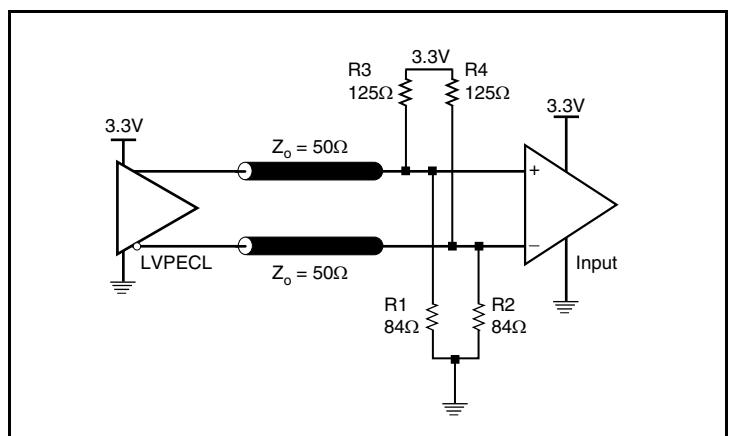

**Figure 3B. 3.3V LVPECL Output Termination**

## Schematic Layout

Figure 4 (next page) shows an example of 813N322I-02 application schematic. In this example, the device is operated at  $V_{CC} = V_{CCA} = V_{CCX} = V_{CCO} = 3.3V$ . The inputs are driven by a 3.3V LVPECL driver and an LVDS driver. Two examples of LVPECL output terminations are shown in this schematic.

A three pole loop filter is used for the greater reduction of 8kHz or 10kHz phase detector spurs relative to that afforded by a two pole loop filter. It is recommended that the loop filter components be laid out on the 813N322I-02 side of the PCB directly adjacent to the LF0 and LF1 pins.

As with any high speed analog circuitry, the power supply pins are vulnerable to random noise. To achieve optimum jitter performance, power supply isolation is required. The 813N322I-02 provides separate  $V_{CC}$ ,  $V_{CCA}$ ,  $V_{CCX}$  and  $V_{CCO}$  power supplies for each jitter attenuator to isolate any high switching noise from coupling into the internal PLLs.

In order to achieve the best possible filtering, it is highly recommended that the  $0.1\mu F$  capacitors on the device side of the ferrite beads be placed on the device side of the PCB as close to the power pins as possible. This is represented by the placement of these capacitors in the schematic. If space is limited, the ferrite beads,  $10\mu F$  and  $0.1\mu F$  capacitor connected to 3.3V can be placed on the opposite side of the PCB. If space permits, place all filter components on the device side of the board.

Power supply filter recommendations are a general guideline to be used for reducing external noise from coupling into the devices. The filter performance is designed for a wide range of noise frequencies. This low-pass filter starts to attenuate noise at approximately 10kHz. If a specific frequency noise component is known, such as switching power supplies frequencies, it is recommended that component values be adjusted and if required, additional filtering be added. Additionally, good general design practices for power plane voltage stability suggests adding bulk capacitance in the local area of all devices.

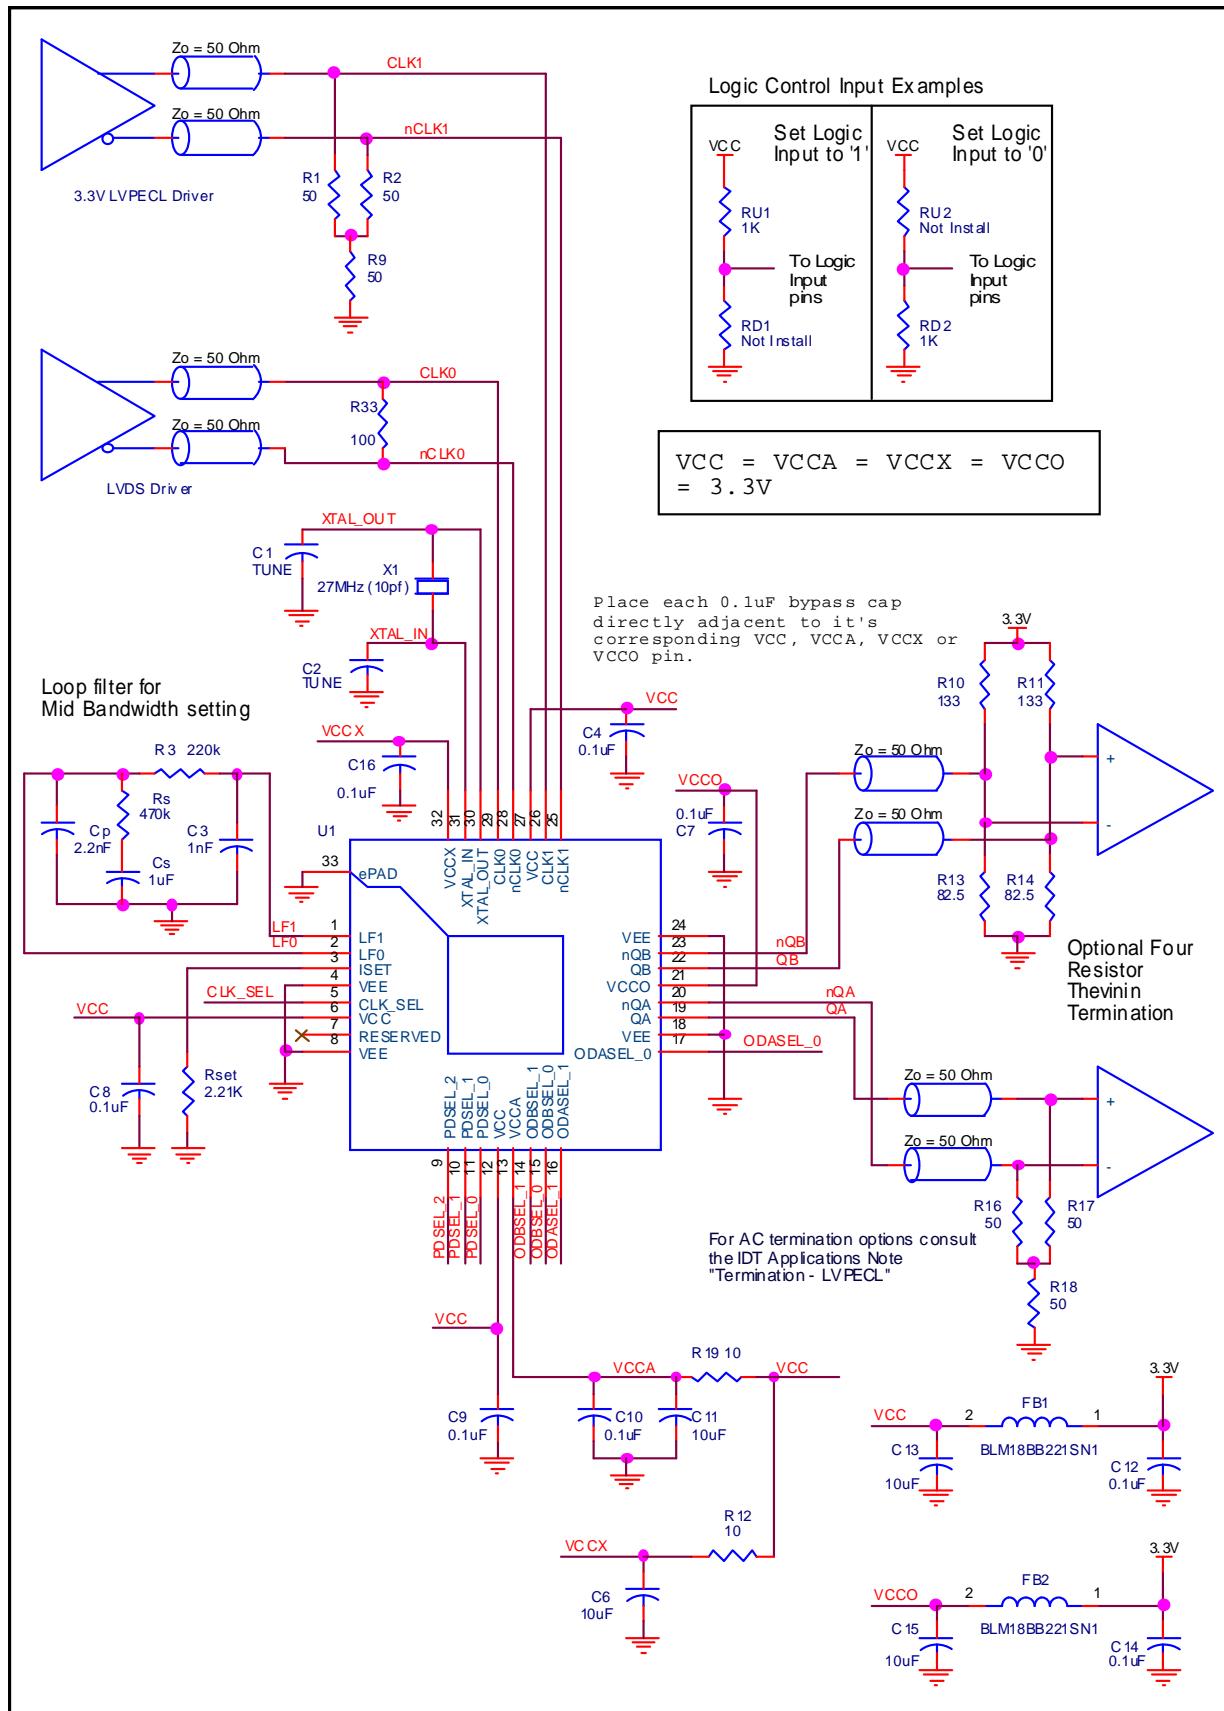



Figure 4. 813N322I-02 Application Schematic

## Jitter Attenuator External Components

Choosing the correct external components and having a proper printed circuit board (PCB) layout is a key task for quality operation of the Jitter Attenuator. In choosing a crystal, special precaution must be taken with load capacitance ( $C_L$ ), frequency accuracy and temperature range.

The crystal's  $C_L$  characteristic determines its resonating frequency and is closely related to the center tuning of the crystal. The total external capacitance seen by the crystal when installed on a PCB is the sum of the stray board capacitance, IC package lead capacitance, internal device capacitance and any installed tuning capacitors ( $C_{TUNE}$ ). The recommended  $C_L$  in the Crystal Parameter Table balances the tuning range by centering the tuning curve for a typical PCB. If the crystal  $C_L$  is greater than the total external capacitance, the crystal will oscillate at a higher frequency than the specification. If the crystal  $C_L$  is lower than the total external capacitance, the crystal will oscillate at a lower frequency than the specification. Tuning adjustments might be required depending on

the PCB parasitics or if using a crystal with a higher  $C_L$  specification. In addition, the frequency accuracy specification in the crystal characteristics table are used to calculate the APR (Absolute Pull Range).

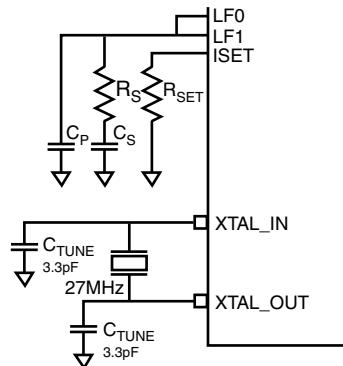

## Crystal Characteristics

| Symbol | Parameter                     | Test Conditions | Minimum | Typical     | Maximum  | Units              |
|--------|-------------------------------|-----------------|---------|-------------|----------|--------------------|
|        | Mode of Oscillation           |                 |         | Fundamental |          |                    |
| $f_N$  | Frequency                     |                 |         | 27          |          | MHz                |
| $f_T$  | Frequency Tolerance           |                 |         |             | $\pm 20$ | ppm                |
| $f_S$  | Frequency Stability           |                 |         |             | $\pm 20$ | ppm                |
|        | Operating Temperature Range   |                 | -40     |             | +85      | $^{\circ}\text{C}$ |
| $C_L$  | Load Capacitance              |                 |         | 10          |          | pF                 |
| $C_0$  | Shunt Capacitance             |                 |         | 4           |          | pF                 |
| ESR    | Equivalent Series Resistance  |                 |         |             | 40       | $\Omega$           |
|        | Aging @ 25 $^{\circ}\text{C}$ | First Year      |         |             | $\pm 3$  | ppm                |

The VCXO-PLL Loop Bandwidth Selection Table shows  $R_S$ ,  $C_S$ ,  $C_P$  and  $R_{SET}$  values for recommended high, mid and low loop bandwidth configurations. The device has been characterized using these parameters. In addition, the digital VCXO gain ( $k_{VCXO}$ ) has been provided for additional loop filter requirements.

## Jitter Attenuator Characteristics Table

| Symbol     | Parameter | Typical | Units |
|------------|-----------|---------|-------|
| $k_{VCXO}$ | VCXO Gain | 2.018   | kHz/V |

## Jitter Attenuator Loop Bandwidth Selection Table (2<sup>ND</sup> Order Loop Filter)

| Bandwidth   | Crystal Frequency | $R_S$ (k $\Omega$ ) | $C_S$ ( $\mu\text{F}$ ) | $C_P$ ( $\mu\text{F}$ ) | $R_3$ (k $\Omega$ ) | $C_3$ (k $\Omega$ ) | $R_{SET}$ (k $\Omega$ ) |
|-------------|-------------------|---------------------|-------------------------|-------------------------|---------------------|---------------------|-------------------------|
| 9Hz (Low)   | 27MHz             | 140                 | 10                      | 0.01                    | 0                   | Do not Populate     | 2.21                    |
| 44Hz (Mid)  | 27MHz             | 487                 | 1                       | 0.0022                  | 0                   | Do not Populate     | 1.87                    |
| 56Hz (High) | 27MHz             | 487                 | 1                       | 0.0022                  | 0                   | Do not Populate     | 1.5                     |

**NOTE:** See Application schematic to identify loop filter components  $R_S$ ,  $C_S$ ,  $C_P$ ,  $R_3$ ,  $C_3$  and  $R_{SET}$ .

For applications in which there is substantial low frequency jitter in the input reference and the phase detector frequency of 8kHz or 10kHz lies in or near a jitter mask, a three pole filter is recommended.

Suggested part values are in the table below. Note that the option of a three pole filter can be left open by laying out the three pole filter but setting R3 to 0 ohms and not populating C3. Refer to the application schematic for a specific example.

#### Jitter Attenuator Loop Bandwidth Selection Table (3<sup>RD</sup> Order Loop Filter)

| Bandwidth   | Crystal Frequency | R <sub>S</sub> (kΩ) | C <sub>S</sub> (μF) | C <sub>P</sub> (μF) | R3 (kΩ) | C3 (kΩ) | R <sub>SET</sub> (kΩ) |
|-------------|-------------------|---------------------|---------------------|---------------------|---------|---------|-----------------------|
| 14Hz (Low)  | 27MHz             | 300                 | 1                   | 0.01                | 220     | 0.001   | 3.0                   |
| 29Hz (Mid)  | 27MHz             | 470                 | 1                   | 0.0022              | 220     | 0.001   | 2.21                  |
| 52Hz (High) | 27MHz             | 520                 | 1                   | 0.0022              | 220     | 0.001   | 1.5                   |

**NOTE: See Application schematic to identify loop filter components R<sub>S</sub>, C<sub>S</sub>, C<sub>P</sub>, R3, C3 and R<sub>SET</sub>.**


The crystal and external loop filter components should be kept as close as possible to the device. Loop filter and crystal traces should be kept short and separated from each other. Other signal traces should be kept separate and not run underneath the device, loop filter or crystal components.

## VFQFN EPAD Thermal Release Path

In order to maximize both the removal of heat from the package and the electrical performance, a land pattern must be incorporated on the Printed Circuit Board (PCB) within the footprint of the package corresponding to the exposed metal pad or exposed heat slug on the package, as shown in *Figure 5*. The solderable area on the PCB, as defined by the solder mask, should be at least the same size/shape as the exposed pad/slug area on the package to maximize the thermal/electrical performance. Sufficient clearance should be designed on the PCB between the outer edges of the land pattern and the inner edges of pad pattern for the leads to avoid any shorts.

While the land pattern on the PCB provides a means of heat transfer and electrical grounding from the package to the board through a solder joint, thermal vias are necessary to effectively conduct from the surface of the PCB to the ground plane(s). The land pattern must be connected to ground through these vias. The vias act as "heat pipes". The number of vias (i.e. "heat pipes") are application specific

and dependent upon the package power dissipation as well as electrical conductivity requirements. Thus, thermal and electrical analysis and/or testing are recommended to determine the minimum number needed. Maximum thermal and electrical performance is achieved when an array of vias is incorporated in the land pattern. It is recommended to use as many vias connected to ground as possible. It is also recommended that the via diameter should be 12 to 13mils (0.30 to 0.33mm) with 1oz copper via barrel plating. This is desirable to avoid any solder wicking inside the via during the soldering process which may result in voids in solder between the exposed pad/slug and the thermal land. Precautions should be taken to eliminate any solder voids between the exposed heat slug and the land pattern. Note: These recommendations are to be used as a guideline only. For further information, please refer to the Application Note on the Surface Mount Assembly of Amkor's Thermally/Electrically Enhance Leadframe Base Package, Amkor Technology.

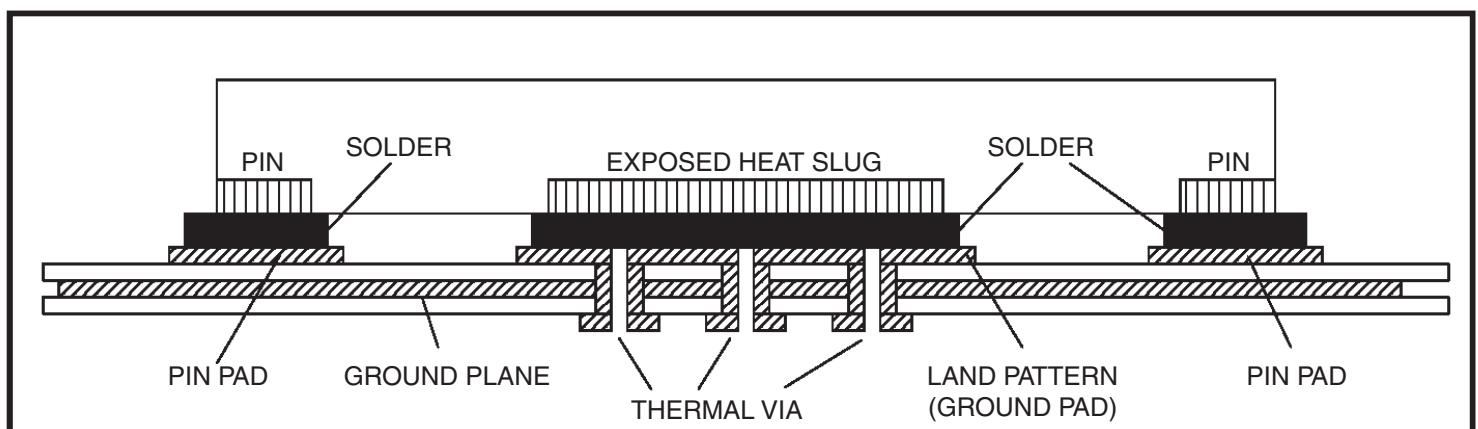

**Figure 5. P.C. Assembly for Exposed Pad Thermal Release Path – Side View (drawing not to scale)**

## Power Considerations

This section provides information on power dissipation and junction temperature for the 813N322I-02. Equations and example calculations are also provided.

### 1. Power Dissipation.

The total power dissipation for the 813N322I-02 is the sum of the core power plus the power dissipated in the load(s). The following is the power dissipation for  $V_{CC0} = 3.3V + 5\% = 3.465V$ , which gives worst case results.

NOTE: Please refer to Section 3 for details on calculating power dissipated in the load.

- Power (core)<sub>MAX</sub> =  $V_{CC0\_MAX} * I_{EE\_MAX} = 3.465V * 274mA = 949.41\text{mW}$
- Power (outputs)<sub>MAX</sub> = **31.55mW/Loaded Output pair**  
If all outputs are loaded, the total power is  $2 * 31.55\text{mW} = 63.1\text{mW}$

**Total Power<sub>MAX</sub>** (3.3V, with all outputs switching) =  $949.41\text{mW} + 63.1\text{mW} = 1012.51\text{mW}$

### 2. Junction Temperature.

Junction temperature,  $T_j$ , is the temperature at the junction of the bond wire and bond pad directly affects the reliability of the device. The maximum recommended junction temperature is 125°C. Limiting the internal transistor junction temperature,  $T_j$ , to 125°C ensures that the bond wire and bond pad temperature remains below 125°C.

The equation for  $T_j$  is as follows:  $T_j = \theta_{JA} * P_{d\_total} + T_A$

$T_j$  = Junction Temperature

$\theta_{JA}$  = Junction-to-Ambient Thermal Resistance

$P_{d\_total}$  = Total Device Power Dissipation (example calculation is in section 1 above)

$T_A$  = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance  $\theta_{JA}$  must be used. Assuming no air flow and a multi-layer board, the appropriate value is 33.1°C/W per Table 6 below.

Therefore,  $T_j$  for an ambient temperature of 85°C with all outputs switching is:

$85^\circ\text{C} + 1.013\text{W} * 33.1^\circ\text{C/W} = 118.5^\circ\text{C}$ . This is below the limit of 125°C.

This calculation is only an example.  $T_j$  will obviously vary depending on the number of loaded outputs, supply voltage, air flow and the type of board (multi-layer).


**Table 6. Thermal Resistance  $\theta_{JA}$  for 32 Lead VFQFN, Forced Convection**

| $\theta_{JA}$ by Velocity                   |          |          |          |
|---|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2.5      |
| Multi-Layer PCB, JEDEC Standard Test Boards | 33.1°C/W | 28.1°C/W | 25.4°C/W |

### 3. Calculations and Equations.

The purpose of this section is to calculate the power dissipation for the LVPECL output pair.

LVPECL output driver circuit and termination are shown in *Figure 6*.

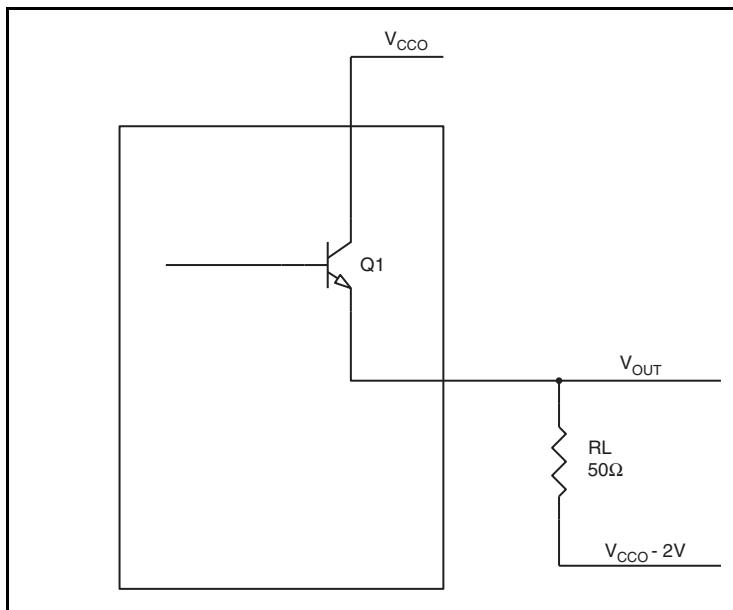

**Figure 6. LVPECL Driver Circuit and Termination**

To calculate worst case power dissipation into the load, use the following equations which assume a  $50\Omega$  load, and a termination voltage of  $V_{CCO} - 2V$ .

- For logic high,  $V_{OUT} = V_{OH\_MAX} = V_{CCO\_MAX} - 0.75V$   
 $(V_{CC\_MAX} - V_{OH\_MAX}) = 0.75V$
- For logic low,  $V_{OUT} = V_{OL\_MAX} = V_{CCO\_MAX} - 1.6V$   
 $(V_{CC\_MAX} - V_{OL\_MAX}) = 1.6V$

$Pd_H$  is power dissipation when the output drives high.

$Pd_L$  is the power dissipation when the output drives low.

$$Pd_H = [(V_{OH\_MAX} - (V_{CCO\_MAX} - 2V))/R_L] * (V_{CCO\_MAX} - V_{OH\_MAX}) = [(2V - (V_{CCO\_MAX} - V_{OH\_MAX}))/R_L] * (V_{CCO\_MAX} - V_{OH\_MAX}) = [(2V - 0.75V)/50\Omega] * 0.75V = 18.75mW$$

$$Pd_L = [(V_{OL\_MAX} - (V_{CCO\_MAX} - 2V))/R_L] * (V_{CCO\_MAX} - V_{OL\_MAX}) = [(2V - (V_{CCO\_MAX} - V_{OL\_MAX}))/R_L] * (V_{CCO\_MAX} - V_{OL\_MAX}) = [(2V - 1.6V)/50\Omega] * 1.6V = 12.80mW$$

$$\text{Total Power Dissipation per output pair} = Pd_H + Pd_L = 31.55mW$$

## Reliability Information

**Table 7.  $\theta_{JA}$  vs. Air Flow Table for a 32 Lead VFQFN**




| $\theta_{JA}$ vs. Air Flow                  |          |          |          |
|---|----------|----------|----------|
| Meters per Second                           | 0        | 1        | 2.5      |
| Multi-Layer PCB, JEDEC Standard Test Boards | 33.1°C/W | 28.1°C/W | 25.4°C/W |

## Transistor Count

The transistor count for 813N322I-02 is: 44,795

## Package Outline and Package Dimensions

### Package Outline - K Suffix for 32 Lead VFQFN

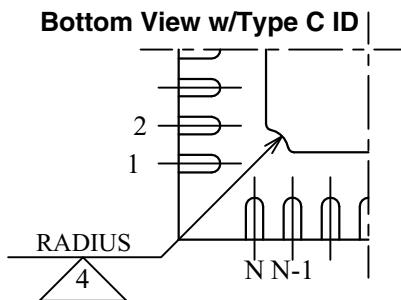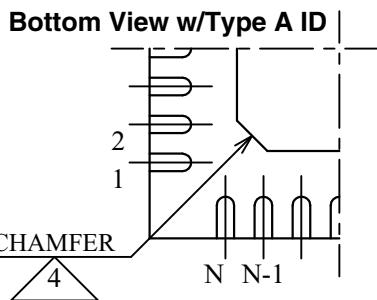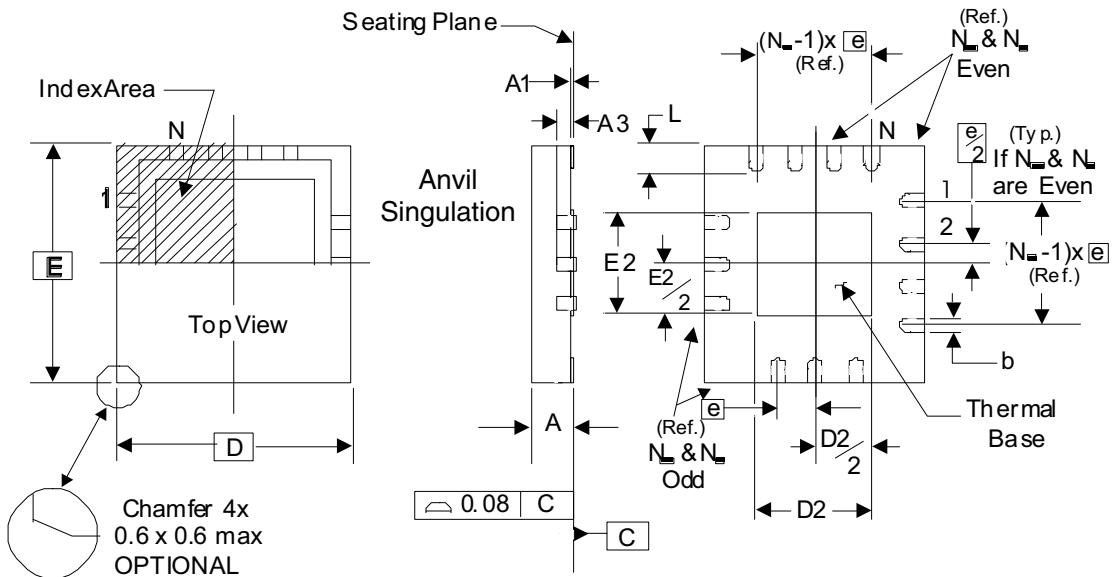

There are 2 methods of indicating pin 1 corner at the back of the VFQFN package:

1. Type A: Chamfer on the paddle (near pin 1)
2. Type C: Mouse bite on the paddle (near pin 1)

**Table 8. Package Dimensions**

| JEDEC Variation: VHHD-2/4<br>All Dimensions in Millimeters |         |            |         |
|--|---------|------------|---------|
| Symbol   | Minimum | Nominal    | Maximum |
| <b>N</b>   |         | 32         |         |
| <b>A</b>   | 0.80    |            | 1.00    |
| <b>A1</b>  | 0       |            | 0.05    |
| <b>A3</b>  |         | 0.25 Ref.  |         |
| <b>b</b>   | 0.18    | 0.25       | 0.30    |
| <b>N<sub>D</sub> &amp; N<sub>E</sub></b>                   |         |            | 8       |
| <b>D &amp; E</b>   |         | 5.00 Basic |         |
| <b>D2 &amp; E2</b>   | 3.0     |            | 3.3     |
| <b>e</b>   |         | 0.50 Basic |         |
| <b>L</b>   | 0.30    | 0.40       | 0.50    |

NOTE: The following package mechanical drawing is a generic drawing that applies to any pin count VFQFN package. This drawing is not intended to convey the actual pin count or pin layout of this device. The pin count and pin out are shown on the front page. The package dimensions are in Table 8.

## Ordering Information

**Table 9. Ordering Information**

| Part/Order Number | Marking     | Package                   | Shipping Packaging | Temperature   |
|-------------------|-------------|---------------------------|--------------------|---------------|
| 813N322CKI-02LF   | ICS322CI02L | “Lead-Free” 32 Lead VFQFN | Tray               | -40°C to 85°C |
| 813N322CKI-02LFT  | ICS322CI02L | “Lead-Free” 32 Lead VFQFN | Tape & Reel        | -40°C to 85°C |

## Revision History Sheet

| Rev | Table   | Page               | Description of Change   | Date    |
|-----|---------|--------------------|---|---------|
| B   | 4A<br>5 | 6<br>8<br>10<br>23 | V <sub>CCA</sub> Min: changed V <sub>CC-0.27</sub> to V <sub>C<sub>C-0.30</sub></sub> ; I <sub>CCA</sub> Max: changed 27mA to 30mA.<br>t <sub>R</sub> /t <sub>F</sub> : changed 140ps to 100ps.<br>Corrected Differential Input Level diagram.<br>Deleted Tape and Reel quantity.<br>Per PCN No. N1205-01 | 8/11/12 |
| B   |         | 1<br>15            | Removed PCN nomenclature.<br>New Schematic.   | 8/22/12 |
| C   |         |                    | Deleted “ICS” prefix from part number.<br>Updated datasheet header/footer.  | 2/26/16 |



## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit [www.renesas.com/contact-us/](http://www.renesas.com/contact-us/).