

Introduction of LoRa[®]-based Solutions for RL78 Family

DEC.26, 2025

EMBEDDED PROCESSOR AND CONTROLLER SOLUTION
MARKETING DEPT
EMBEDDED PROCESSING MARKETING DIVISION
EMBEDDED PROCESSING PRODUCT GROUP
RENESAS ELECTRONICS CORPORATION

Introduction

This guide provides an overview of the protocol stacks, evaluation tools, software development environment for better understanding before starting the development of the LoRaWAN® and LoRa® based applications.

This document covers the following topics:

- **LoRa®/LoRaWAN® Overview**
- **LoRa®-based Solution for RL78 Family (Protocol Stacks, Evaluation Tools)**
- **Software Development Environment**

Note that [blue and underlined text](#) indicates a link to a web page or document.

(For your reference)

For RA family, ["Introduction of LoRa®-based Solutions for RA Family" \(EPMSM-AA-25-0062\)](#) is also available in the following web page.

LoRa®-based Solutions for RA Family Web Page

<https://www.renesas.com/us/en/application/communication-computing-infrastructure/wireless-network/lora-solutions/lora-solution-ra>

LoRa® / LoRaWAN® Overview

About LoRa® and LoRaWAN®

LoRa® is a modulation technique, and LoRaWAN® is a standardized protocol that uses the LoRa®-based modulation technique.

- **LoRa® (Long Range)**

- A spread spectrum modulation technique derived from chirp spread spectrum (CSS) technology developed by Semtech Corporation.
- Suitable for long distance (Up to 20km in line of sight), low data rate (several hundreds of bps to several tens of kbps), low power consumption communication.
- LoRaWAN® protocol on top of LoRa®-based modulation has been standardized.
- Custom protocol on top of LoRa®-based modulation can be adopted.

- **LoRaWAN® (LoRa® Wide Area Network)**

- Communication protocol for low power and long distance targeted for IoT devices, standardized by LoRa Alliance®.
- Modulation schemes of LoRa® and GFSK (Gaussian Frequency Shift Keying) are utilized.



Application Examples for LoRa® / LoRaWAN®

Wireless Data Communication with Low Quantity Data, Low Rate, Less Frequent and Periodic, Wide Range

▪ Metering

- Data gathering for town/propane gas, water flowmeter etc.
- Data gathering of POS system for vending machine e.g. beverage

▪ Industry / Building

- Data management/forwarding of infrastructure for traffic network e.g. bus, taxi, rent-a-car, bicycle, traffic signal, streetlight, etc.
- Data gathering for monitoring on large structure e.g. tunnel, bridge, buildings, signboard
- Building management related: open/close-door, locking, operation management for air conditioning / lighting / curtain, operation & position management for elevator / escalator, inventory management at warehouse, alarm for alert region
- Centralized data management for agriculture / stockbreeding e.g. watering, positioning system for livestock, monitoring for bird flu etc.

▪ Consumer / Home

- Data management/forwarding for wearable gadget for healthcare
- Tracking system for person e.g. children, elderly people.



Requirements for LPWA Wireless Network


For low-power wide-area (LPWA) network, easy network construction and low-power communications are required.

- **Easy network construction**

LoRaWAN[®] ecosystem provides LoRaWAN[®]-compatible end devices, gateways, network servers, and cloud services. This makes it easy to build a network by preparing them.

- **Low power communications**

Many LPWA applications require fewer number of batteries and long-term operations.
In this case, applications send notifications once every few hours and transit to sleep state in most of the time.
This requires a microcontroller with lower current consumption in sleep state.

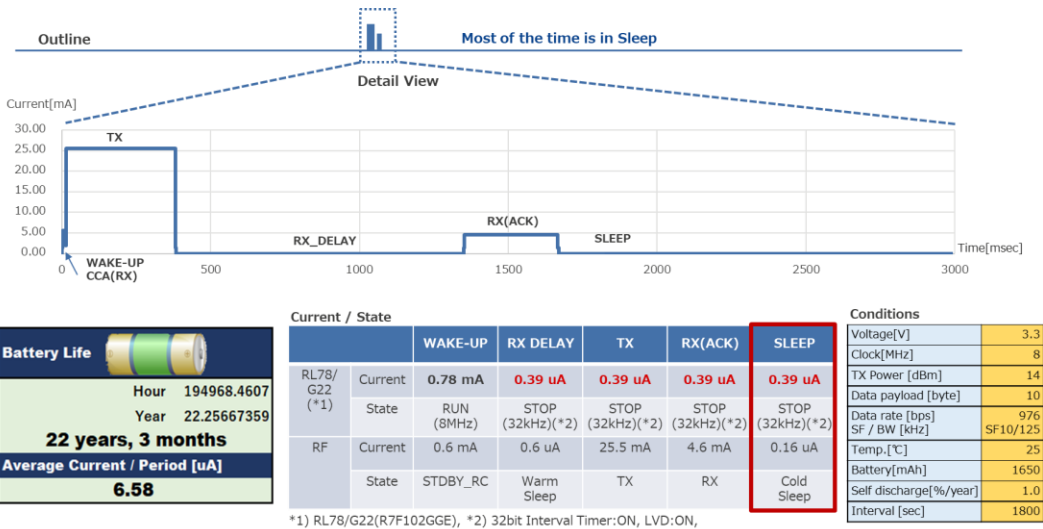

LoRa®-based Solutions for RL78 Family

LoRa®-based Solutions for RL78 Family

Features



Super low power solutions suitable for IoT end node required for long-term battery operations

Low Power

- Ultra-low power microcontroller (RL78) + Semtech LoRa® Transceiver (SX1261/SX1262)
- Communication software designed for low power consumption fully utilizing power saving features of RL78



Achieves less than 1 μA of the current consumption in sleep mode (0.55 μA in the case of RL78/G23 and RL78/G22)
Enables system cost reduction by reducing capacity/number of batteries and lifetime extension

Current in Sleep Mode 0.55 μA

	RL78/G23,G22 SX1261
Sleep	0.55 μA

Easy to Design

- Communication software for LoRaWAN® protocol
- Sample applications easily controlled by AT commands
- Sample applications working with cloud services (AWS, Azure, etc.) to visualize sensor data, etc.



Easy to design IoT applications with low power consumption utilizing LoRaWAN® communication software designed for low power consumption and optimized to meet timing constraints of LoRaWAN®

Communication Software

LoRaWAN® Sample Apps	
LoRaWAN® MAC Stack	LoRa®-based Sample Apps
LoRa®-based Radio Driver	
Smart Configurator	
RL78 + SX1261/SX1262	


Easy to Evaluate

- Evaluation tools useful to estimate power consumption before development, evaluate the wireless performance after prototyping, and analyze the protocol in the event of issues.



Easy to evaluate developed wireless boards and applications.

Wireless Evaluation Tool

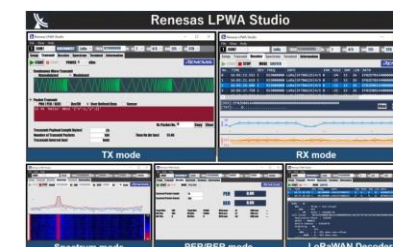

LoRa®-based Solutions for RL78 Family

Current Consumption and Wireless Performance



Chipset, Software


- **RL78/G23, RL78/G22, RL78/L23, RL78/G14** (Microcontroller)
+ Semtech **SX1261/SX1262** (LoRa® Transceiver)

Lower power consumption suitable for long-term battery operation

- **RL78/G23**: Operating mode: 0.84mA@8MHz(*1), STOP mode: 390nA(*1)(*3)
- RL78/G22**: Operating mode: 0.78mA@8MHz(*2), STOP mode: 390nA(*2)(*3)
- **SX1261/SX1262**: Tx: 32mA@+15Bm(*4), 118mA@+22dBm(*5)
Rx: 4.6mA(*4)(*5)

High performance LoRa® transceiver achieves longer range communication

- **Min Rx sensitivity**: -148dBm
- **Max Tx power**: +15dBm(*4), +22dBm(*5)
- **Long range**: Link budget 170dBm (Max)

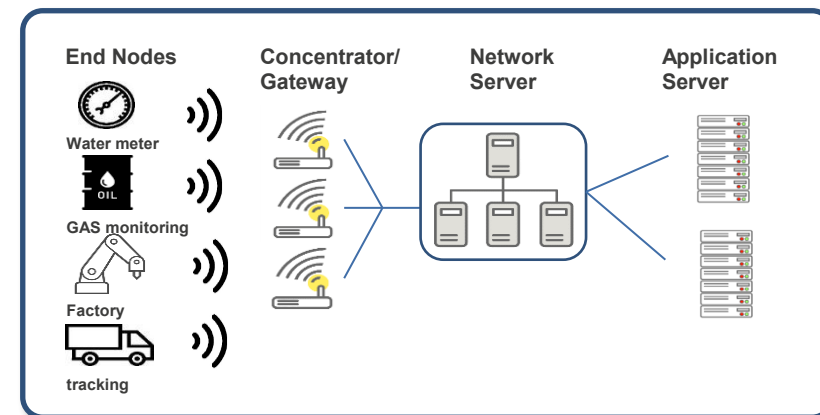

Suitable for IoT end node required for long-term battery operation

Support low power Semtech SX1261/SX1262

In comparison with Semtech SX1276,

- Rx current: approx. 50% (max) reduced
- Tx current: approx. 20% (max) reduced

*1) RL78/G23(R7F100GLG), *2) RL78/G22(R7F102GGE)


*3) Subsystem clock operation mode, 32bit Interval Timer, LVD0: ON

*4) Semtech SX1261, *5) Semtech SX1262

LoRaWAN® Average Current (Estimation)

LoRaWAN® Class A operation - Tx + Rx(ACK)

- Low power consumption of LoRaWAN® stack
 - LoRaWAN® stack shifts RF part to the most suitable low consumption mode automatically according to the inner operating state.
 - MCU part can be shifted to a low consumption mode during frame sending and receiving.
 - The timer function of the low consumption optimized in intermittent operations is supported. This can also be used from an application.

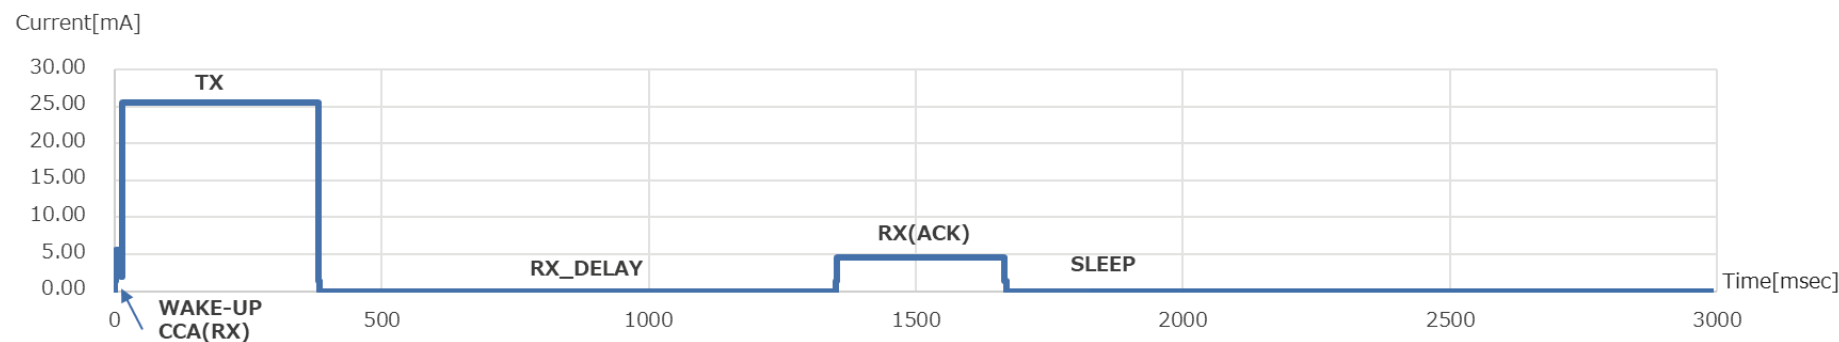

Battery Life	
Hour	194968.4607
Year	22.25667359
22 years, 3 months	
Average Current / Period [uA]	
6.58	

Current / State		WAKE-UP	RX DELAY	TX	RX(ACK)	SLEEP
RL78/G22 (*1)	Current	0.78 mA	0.39 uA	0.39 uA	0.39 uA	0.39 uA
	State	RUN (8MHz)	STOP (32kHz)(*2)	STOP (32kHz)(*2)	STOP (32kHz)(*2)	STOP (32kHz)(*2)
RF	Current	0.6 mA	0.6 uA	25.5 mA	4.6 mA	0.16 uA
	State	STDBY_RC	Warm Sleep	TX	RX	Cold Sleep

Conditions	
Voltage[V]	3.3
Clock[MHz]	8
TX Power [dBm]	14
Data payload [byte]	10
Data rate [bps]	976
SF / BW [kHz]	SF10/125
Temp.[°C]	25
Battery[mAh]	1650
Self discharge[%/year]	1.0
Interval [sec]	1800

*1) RL78/G22(R7F102GGE), *2) 32bit Interval Timer:ON, LVD:ON,

LoRa®-based Wireless Software Package Contents

- Communication software, evaluation tools and documents are bundled into one package (*1).

- LoRa®-based Wireless Software Package (Sample Code)


First, please refer to the following application note.

- LoRa®-based Wireless Software Package (Application Note)

(Contents)

- **Sample Applications (Six Types)** Location: samples¥project
 - **RadioEvalApp**: RF characteristics evaluation program (AT command interface)
 - **Ping-pong**: Simple application using RF driver
 - **LoRaSample**: LoRaWAN® sample application (AT command interface)
 - **LoRaFuotaSample**: LoRaWAN® FUOTA sample application (AT command interface)
 - **PrivateLoRaSample**: Private LoRa®-based network sample application (AT command interface)
 - **LoraWanPrivateLoRaComboSample**: LoRaWAN®-Private LoRa® combination sample application (AT command interface)
- **Evaluation Tools (Two Types)** Location: samples¥tools
 - **Renesas LPWA Studio**: RF characteristics evaluation tool (GUI)
 - **Renesas Power Estimator**: Power estimation tool (Excel)
- **Documents** Location: samples¥documents

Communication Software

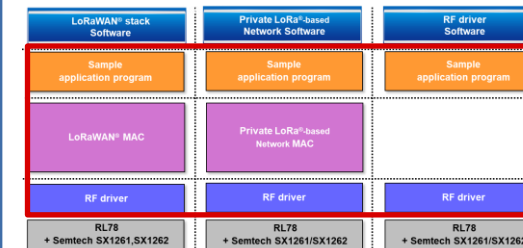

Evaluation Tools



*1) Except for LoRaWAN® Sensor Demo, Fast Prototyping Board BLE & LoRaWAN® Application

LoRa®-based Communication Software

- Offers three types of software for LoRa®-based communication software.
 - **LoRaWAN® protocol stack** : Compliant to LoRaWAN® spec. For interoperability required applications.
 - **Private LoRa®-based Network**: Proprietary LoRa®-based communication spec. For interoperability not required applications.
 - **RF driver**: Applicable for user custom protocol. For interoperability not required applications.

Layer	LoRaWAN® stack Software	Private LoRa®-based Network Software	RF driver Software
Application	Sample application program	Sample application program	Sample application program
MAC (LoRaWAN®)	LoRaWAN® MAC	Private LoRa®-based Network MAC	
PHY (LoRa® / GFSK)	RF driver RL78 + Semtech SX1261,SX1262	RF driver RL78 + Semtech SX1261/SX1262	RF driver RL78 + Semtech SX1261/SX1262

Network Topology Example


LoRaWAN® Stack

- Standardized protocol
- Interoperable with multi-vendor

Private LoRa-based® Network RF Driver


- Applicable for custom protocol
- Flexible for various application

LoRaWAN® Network

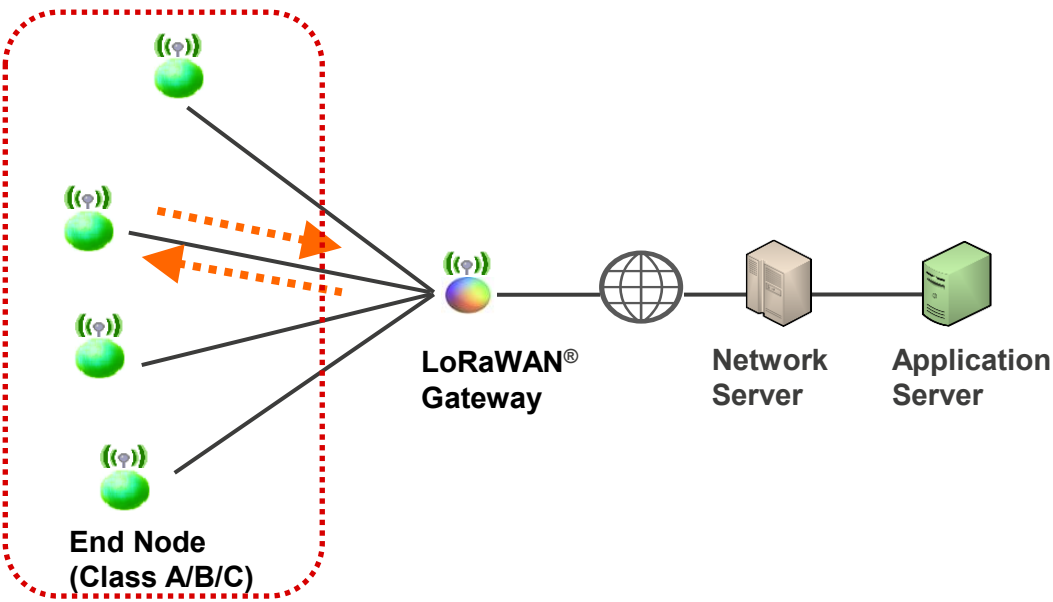


* LoRaWAN® stack supports End Node.

P2P Network (1 to 1)



Star Network (1 to N)

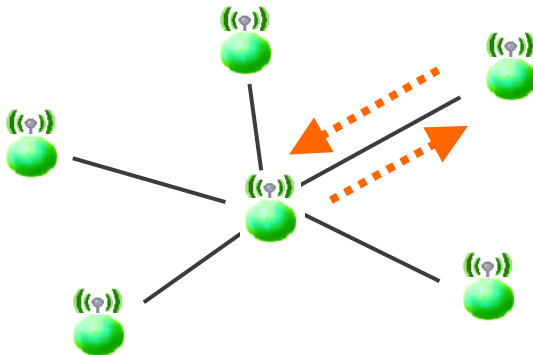


Comparison of LoRaWAN® and Private LoRa®-based Network

- LoRaWAN® uses a communication protocol standardized by LoRa Alliance®, has high interoperability, and is easily connected to the Internet using third parties, making it suitable for building large networks.
- Private LoRa®-based network uses proprietary LoRa®-based communication protocol, allowing control of communication speed and frequency to fit the environment, and are suitable for building small-scale networks.

	LoRaWAN®	Private LoRa®-based Network
Protocol	LoRa Alliance® Standard	Proprietary (custom)
Interoperability	✓	NG
Cloud Connectivity	✓	Optional
Network Capacity	Large	Small
Building an Ecosystem	✓	Optional
Gateway/Server	Required	Not required
Customizability	Optional	✓
Communication Cost	Optional	✓
Bidirectional Communication	Optional	✓
Low Power Consumption Features	✓	✓
Security Functions (Encryption, Tamper-proof)	✓	✓

LoRaWAN® Stack Software Features

- Provides API functions to control LoRaWAN® protocol, power mode of MCU block and timer optimized for low power operation
- Application can request to LoRaWAN® stack via API functions (ex. Request to TX/RX)
- Application is notified of asynchronous event via callback functions (ex. Notification of TX/RX completion)
- LoRaWAN® stack controls power mode of RF block automatically
- OS independent. Easily to implement to various systems

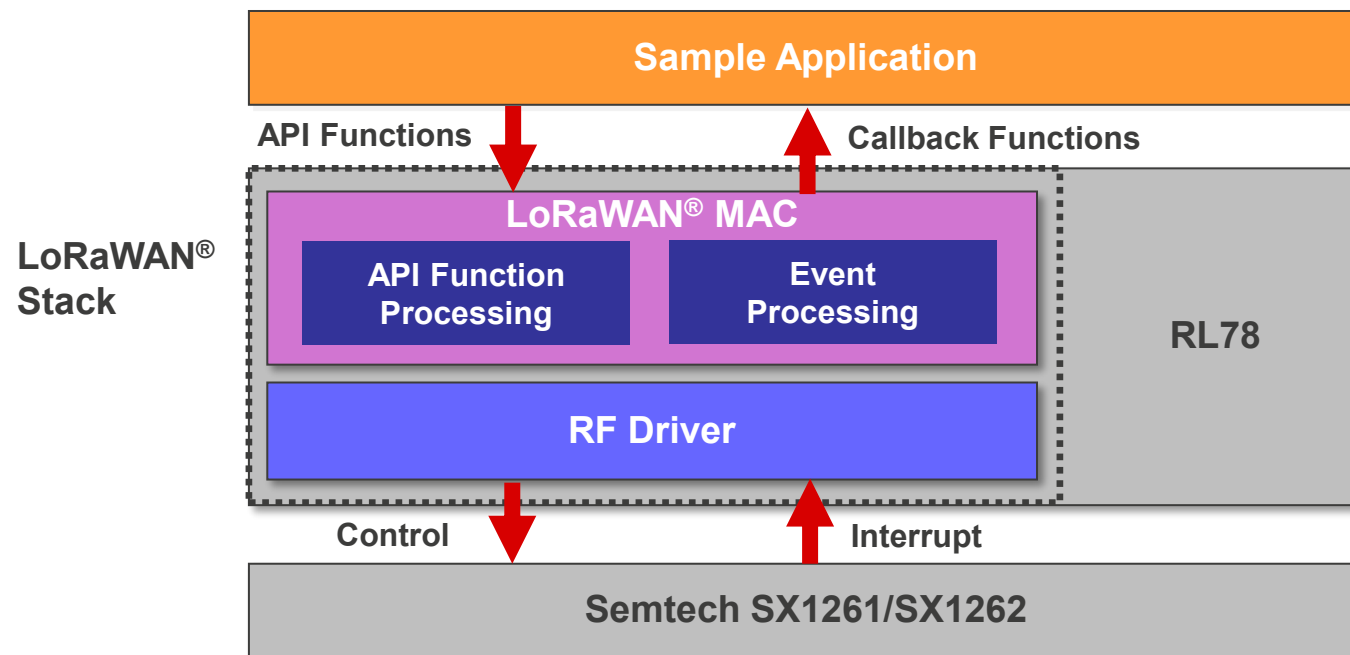

LoRaWAN® Stack Software


Specification Outline

Function	Specification
LoRaWAN® Version	V1.0.4/1.0.3/1.0.2
Device Type	End-device (Class A, Class B* ¹ , Class C)
Frequency Band	863Mz(EU), 915MHz(US), 920MHz(ASEAN/Japan), 865MHz(India), 915MHz(Australia), 920MHz(Korea)
Modulation	LoRa® / GFSK
Data Rate	Data rate is region specific (e.g. LoRa®: 250 bps - 11 kbps, FSK: 50 kbps for AS923/EU868)
Data Size	Maximum payload size is region specific (e.g. Max: 250 bytes for AS923/EU868)
Tx Options	Listen before talk, ACK request
Frame Type	Join Request, Join Accept, Confirmed/Unconfirmed data message
Security	Authentication (OTAA), Encryption/Decryption(AES-CTR), Integrity check (AES-CMAC)
Radio Regulation Control Support	Check whether configured radio parameters conform to regional radio regulation before frame transmission/reception
Low Power Support	Provides API to control power mode of MCU block and timer optimized for low power operation LoRaWAN® stack controls power mode of RF block automatically

*1) Supported for RL78/G23, RL78/L23 and RL78/G14

Private LoRa® Network Sample Software Features

- Provides API functions to control private LoRa® network protocol, power mode of MCU block and timer optimized for low power operation
- Application can request to private LoRa® network stack via API functions (ex. Request to TX/RX)
- Application is notified of asynchronous event via callback functions (ex. Notification of TX/RX completion)
- Private LoRa® network stack controls power mode of RF block automatically
- OS independent. Easily to implement to various systems

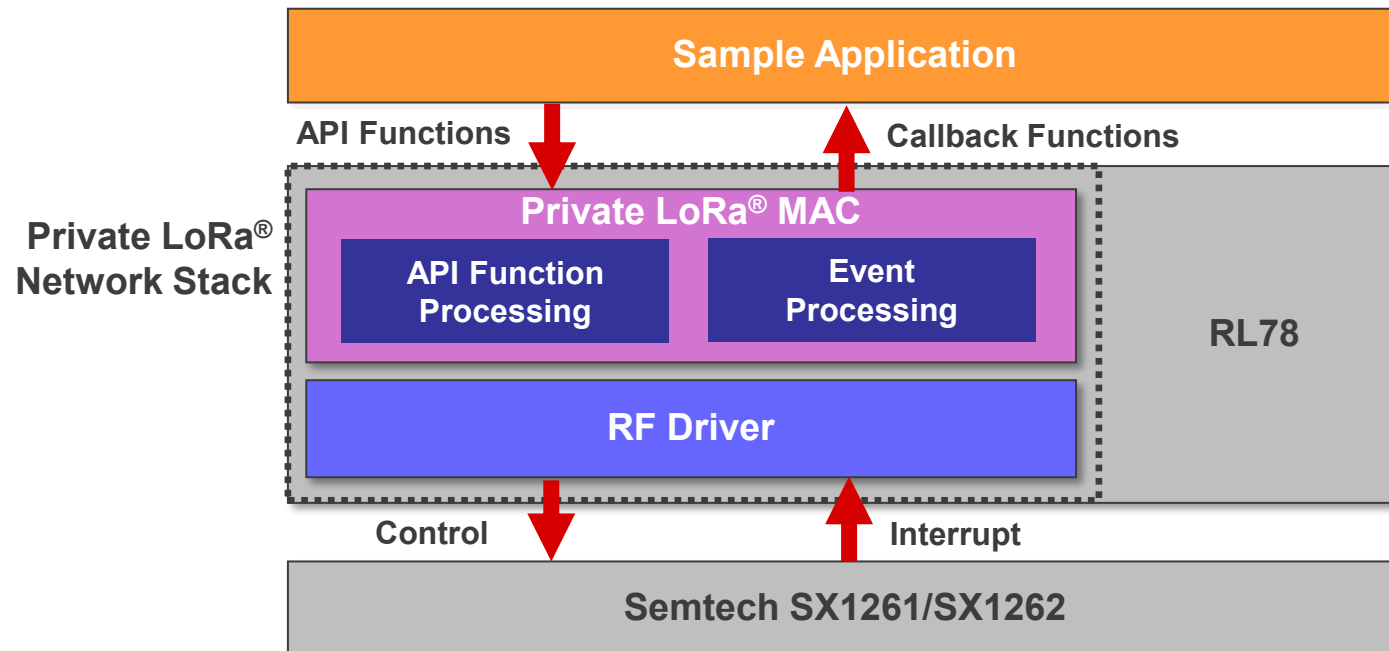

Private LoRa® Network Sample


Specification Outline

Function	Specification
Operation Mode	Intermittent Tx/Rx mode / Continuous Rx mode
Frequency Band	863Mz(EU), 915MHz(US), 920MHz(ASEAN/Japan), 865MHz(India), 915MHz(Australia), 920MHz(Korea)
Modulation	LoRa® / GFSK
Data Rate	Data rate is region specific (e.g. LoRa®: 250 bps - 11 kbps, FSK: 50 kbps for AS923/EU868)
Data Size	Maximum payload size is region specific (e.g. Max: 250 bytes for AS923/EU868)
Tx Options	Listen before talk, ACK request
Security	Encryption/Decryption(AES-CTR), Integrity check (AES-CMAC)
Radio Regulation Control Support	Check whether configured radio parameters conform to regional radio regulation before frame transmission/reception
Low Power Support	Provides API to control power mode of MCU block and timer optimized for low power operation private LoRa® network stack controls power mode of RF block automatically

RF Driver for LoRa®

Features

- Provides API functions to control LoRa® and GFSK PHY layer, power mode of RF block and MCU block and timer optimized for low power operation
- Application can request to RF driver via API functions (ex. Request to TX/RX)
- Application is notified of asynchronous event via callback functions (ex. Notification of TX/RX completion)
- OS independent. Easily to implement to various systems

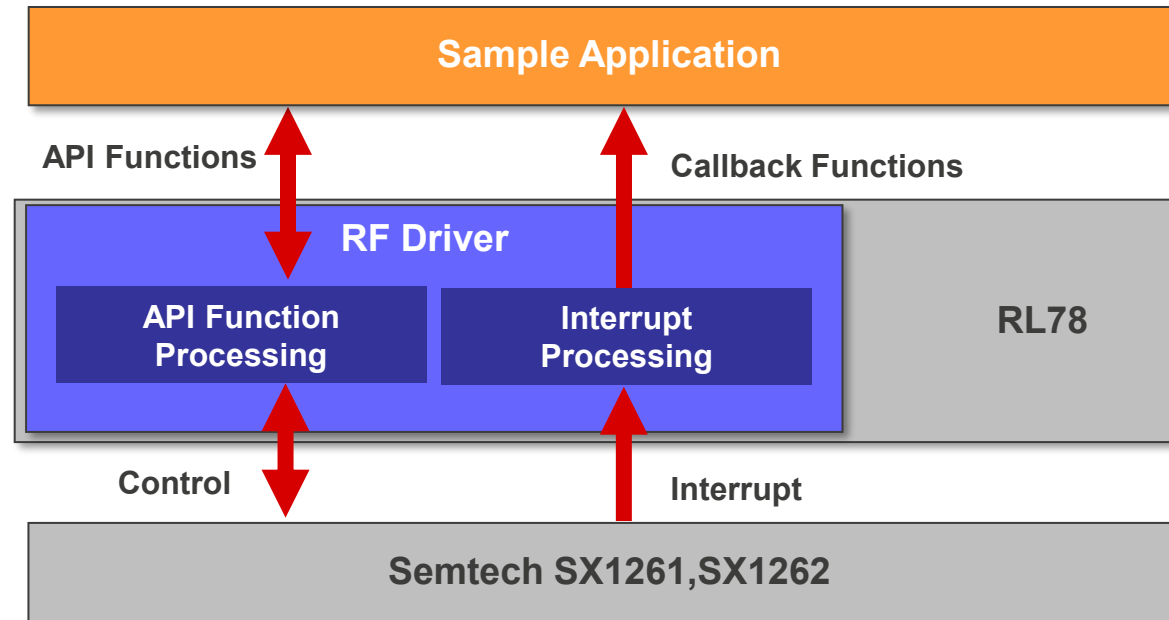

RF Driver Software

Functional Specification Outline

Items	LoRa®	GFSK
Radio frequency range	426MHz to 928MHz	
Max payload length	255 bytes	
Data rate	11.4bps to 62.5kbps	600bps to 300kbps
Bandwidth	7.8kHz to 500kHz	2.6kHz to 250kHz
Spread factor	SF5 to SF12	-
Coding rate	4/5, 4/6, 4/7, 4/8	-
Carrier sense	Yes	
Energy detection	Yes	
RF characteristics evaluation	Continuous unmodulated transmission	
Radio Regulation Control Support	Check whether configured radio parameters conform to regional radio regulation before frame transmission/reception	
Low power support	Provides API to control power mode of RF block, MCU block and timer optimized for low power operation	

RF Driver


Support Functions for Regional Radio Regulation

- RF driver supports the functions to make it easier for the protocols and applications on top of the RF driver to control to conform with the regional radio regulation.

Supported country/region: 863MHz(EU), 915MHz(US), 920MHz(ASEAN/Japan), 865MHz(India), 915MHz(Australia), 920MHz(Korea)

- When this functions are enabled, RF driver checks the following radio parameter configurations and transmission intervals before starting the frame transmission/reception. If RF driver determines those are not compliant with the regulation, it will cancel the transmission/reception. In case the carrier sense is required for the regulation, RF driver automatically executes the carrier sense before sending the frame transmission and cancels it if the carrier is detected.

- Channel frequency / band width**
- Minimum pause duration**
- Maximum sending duration**
- Maximum sending duty cycle**

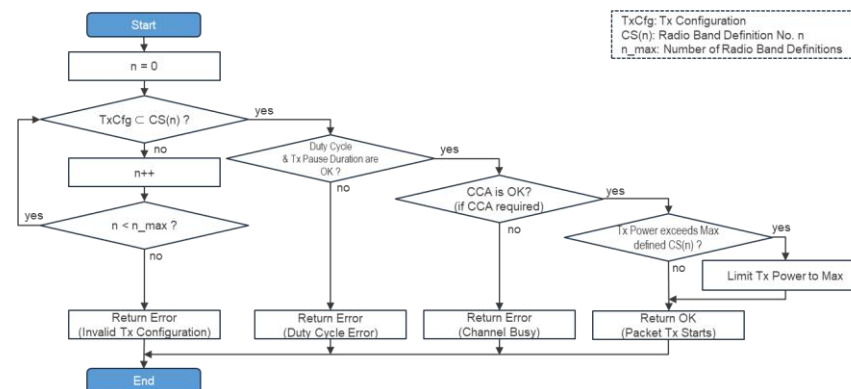

Caution

These functions are intended to make it easier for you to design for compliance with the radio laws and regulations, and does not warrant or guarantee the compliance with the radio laws and regulations. You shall be responsible for using the functions in compliance with the applicable laws and regulations.

Radio Driver Support Functions for Regional Radio Regulations


<https://www.renesas.com/node/25467896>

LoRaWAN® Stack Software

Sample Program Command List (Excerpt)

- LoRaWAN® stack sample program supports AT commands to request to join network and send/receive data messages to/from LoRaWAN® stack.
- It also supports the certification test mode that can be used for the LoRaWAN certification test.



Command	Description
+SAVE	Save parameters to the data flash
+LOAD	Load parameters from the data flash
+REGION	Set/get region
+CLASS	Set/get device class
+ACTMODE	Set/get activation mode
+DEVEUI	Set/get device EUI (DevEUI)
+APPEUI	Set/get application identifier (AppEUI)
+APPKEY	Set application key (AppKey)
+JOIN	Activate the device according to the activation mode
+MTYPE	Set/get message type (confirmed / unconfirmed) of data messages to be sent
+FPORT	Set/get port number (FPort) of data messages to be sent
+RSSI	Enable/disable RSSI display
+SENDHEX	Send data message of hexadecimal
+RCVD	Notify reception of a data message
+ADR	Enable/disable ADR mode
+DR	Set/get default data rate in case ADR is disabled
+DCYCLE	Enable/disable duty cycle control
+COMPLIANCE	Set/get certification test mode setting or enable certification test mode

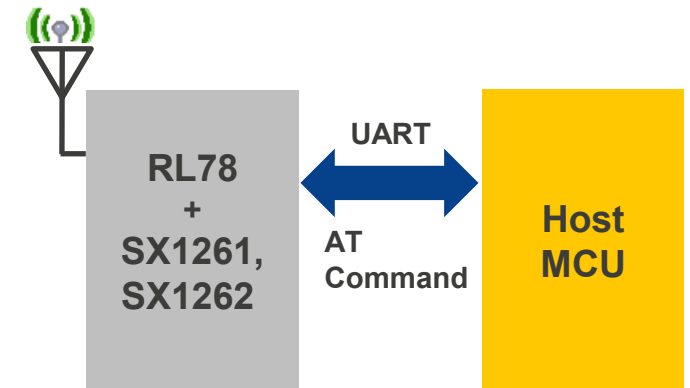

LoRaWAN® Stack Software

Firmware Update over LoRaWAN® (*1)


- FUOTA (Firmware Updates Over The Air) provides a function to remotely update a firmware over wireless communication. This function is a key feature for IoT applications deployed widely in the field and that require long term operation.
- The LoRa Alliance® standardized the FUOTA process utilizing the application layer protocols on top of the LoRaWAN® protocol, such as Clock Synchronization Message Package, Remote Multicast Setup Package and Fragmented Data Block Transport Package. These protocols can deliver a firmware image to multiple devices at the time specified by an application server.
- To update the firmware of the MCU, the application program including the communication part can be updated by switching to the firmware rewrite program using the boot swap of the RL78 MCU.

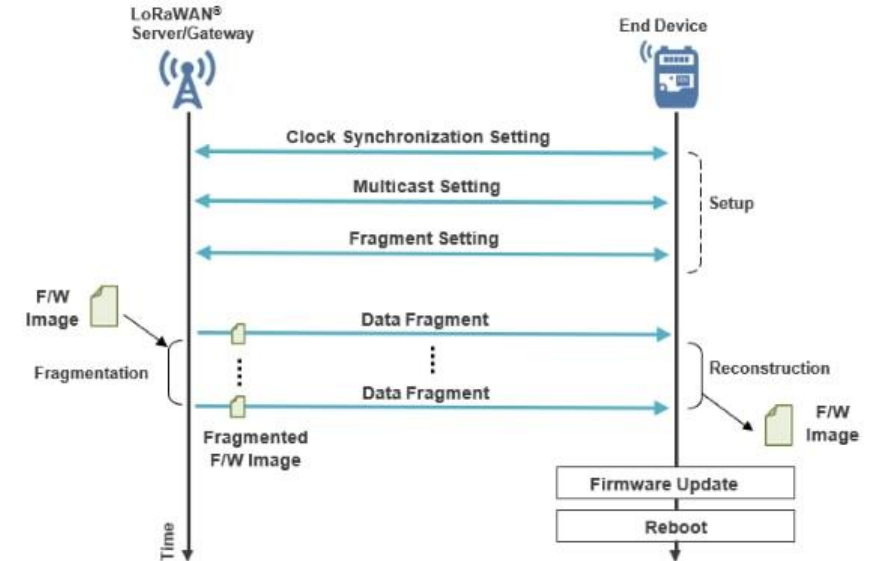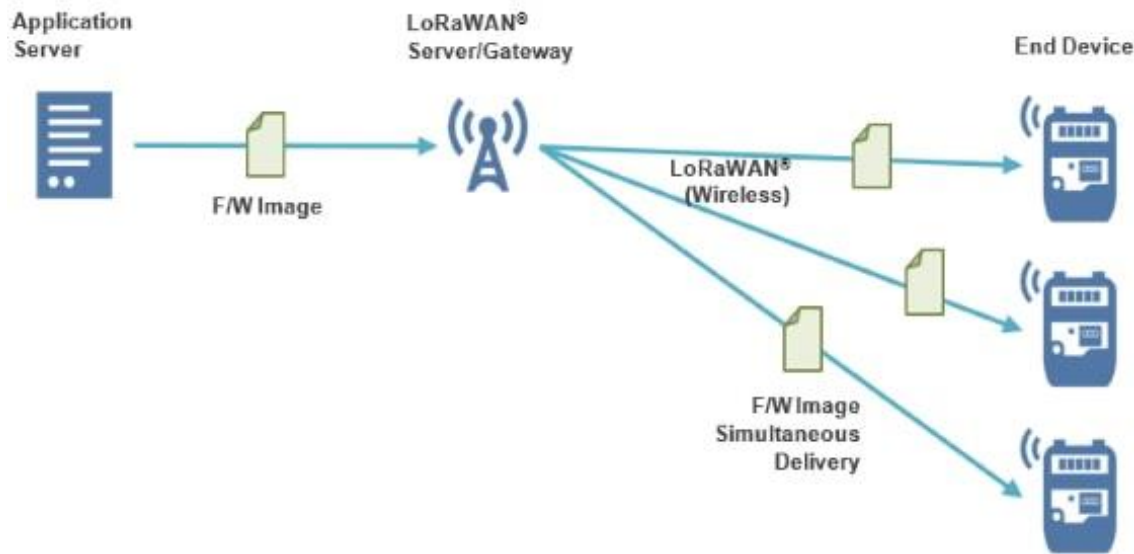

*1) Supports RL78/G23, RL78/L23 and RL78/G14

Private LoRa®-based Network Sample Features


- Private LoRa®-based network sample provides a small network environment using LoRa®-based protocol.
- It allows direct and indirect transmissions between devices, as well as bidirectional communication.
- AT commands can be used to control intermittent operation and key exchange necessary for security, making it easy to construct a network environment.
- Communication interval can be flexibly changed, which is useful for balancing the amount of data communication and power consumption.

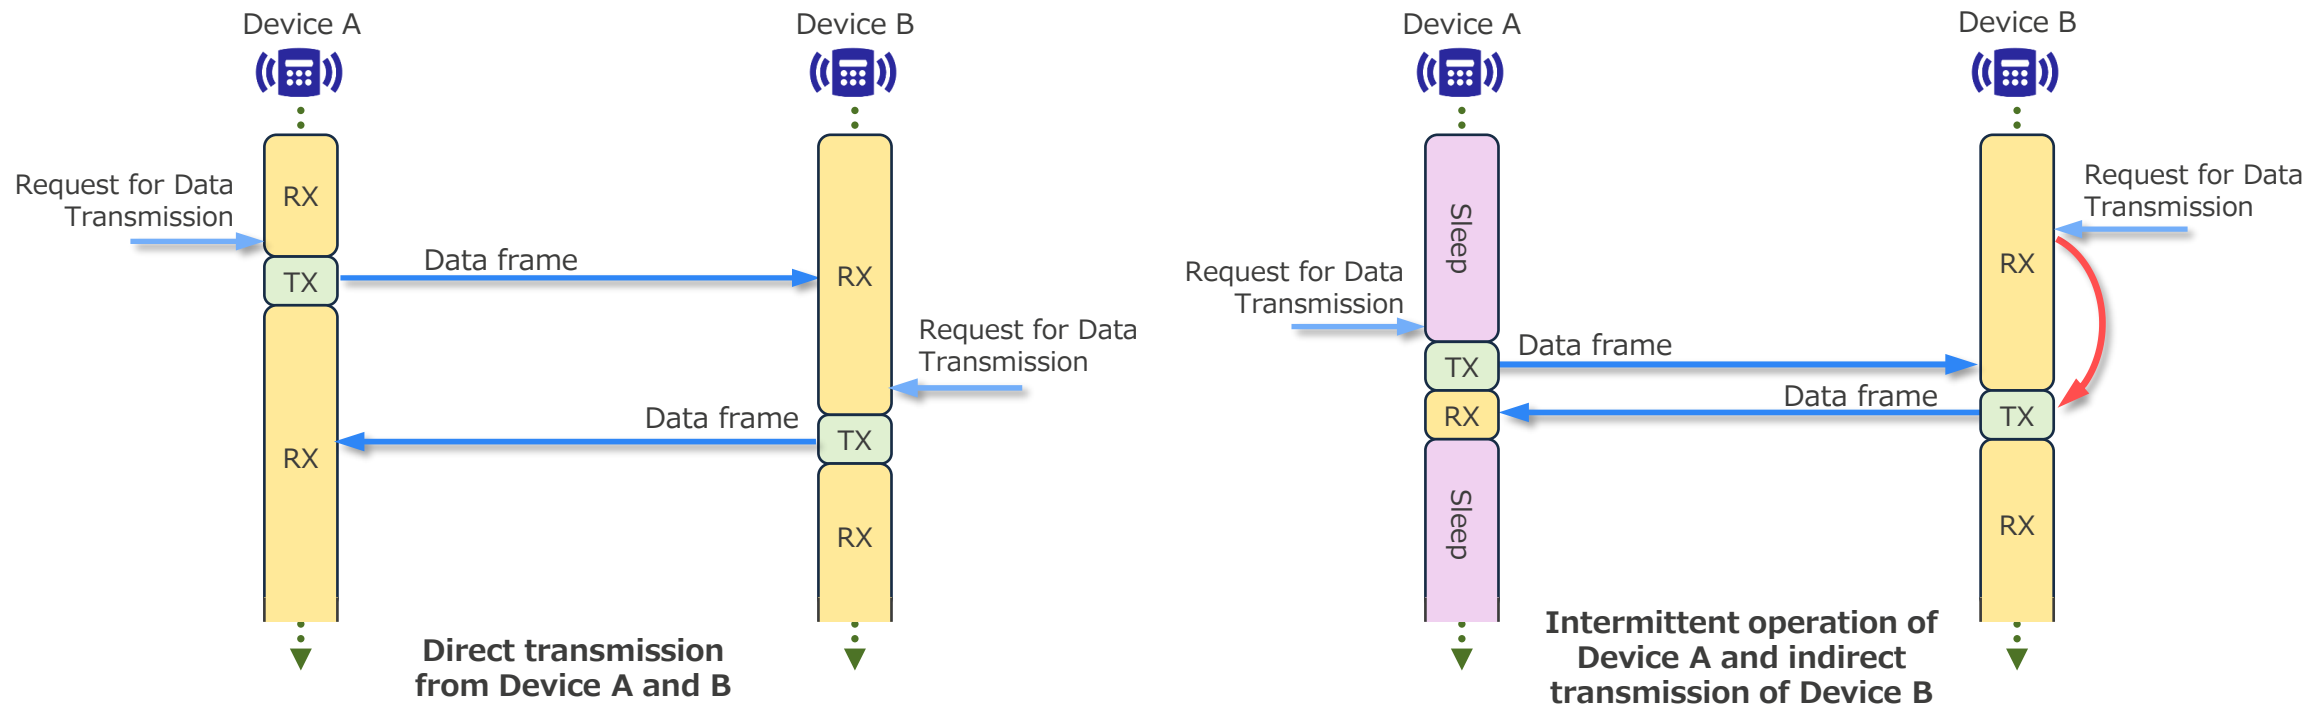

Private LoRa[®]-based Network Sample

LoRaWAN[®] and Private LoRa[®]-based Network Combination Sample*1

- LoRaWAN[®] and private LoRa[®]-based network can be switched dynamically (time-division operation), which are suitable for wide-area / large-scale network communication and small / ad-hoc network communication, respectively.
- Resumes communication immediately after network switch by retaining parameters required for LoRaWAN[®] and private LoRa[®]-based network.
- Supports low power function utilizing intermittent operation, frame encryption and frame integrity check functions.
- Use case: automatic meter reading application
LoRaWAN[®] is used as main network to collect metering data automatically. Private LoRa[®]-based network can be used as sub network for operator to get metering data directly from a meter in case of bad wireless environment

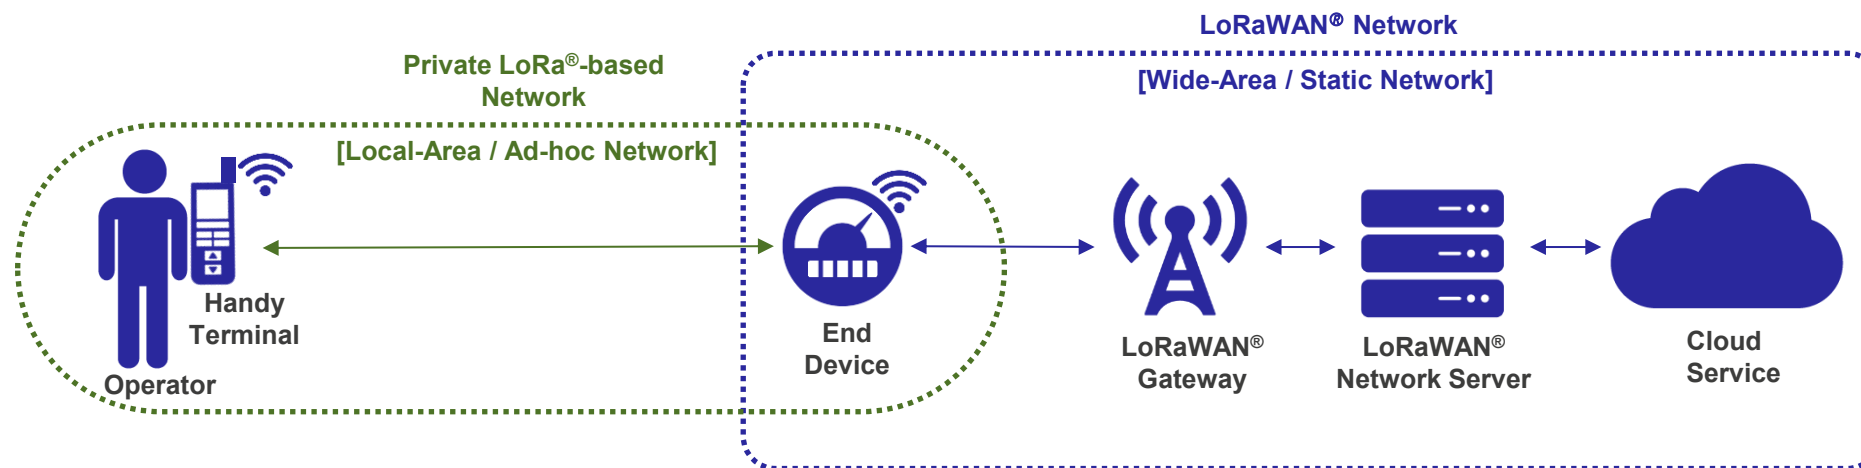

*1) Supported for RL78/G23, RL78/L23 and RL78/G14

Evaluation Tool

Renesas LPWA Studio


- **RF Characteristics Evaluation Function**

RF characteristic evaluations such as packet transmission/reception, PER/BER measurement, RSSI measurement can be conducted via the GUI.


- **Sniffer Function**

LoRa® / GFSK frames can be captured and analyzed fields of the frames can be shown on the GUI. Analysis of the LoRaWAN® protocol frames are also supported.


*1) PER: Packet Error Rate, BER: Bit Error Rate

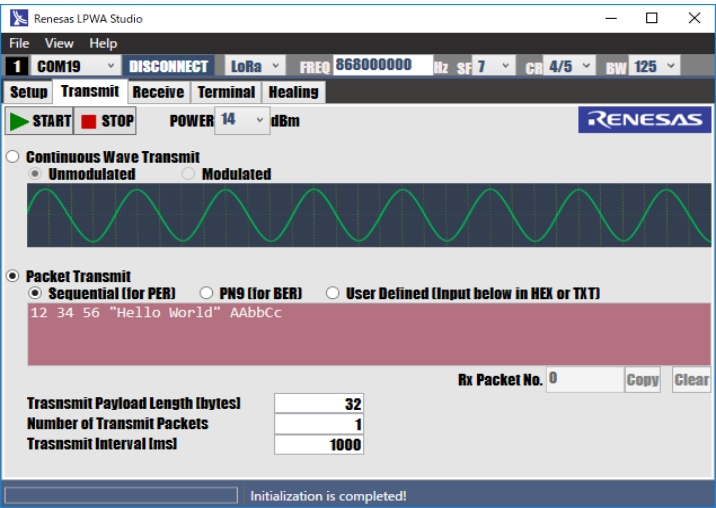

Transmission mode

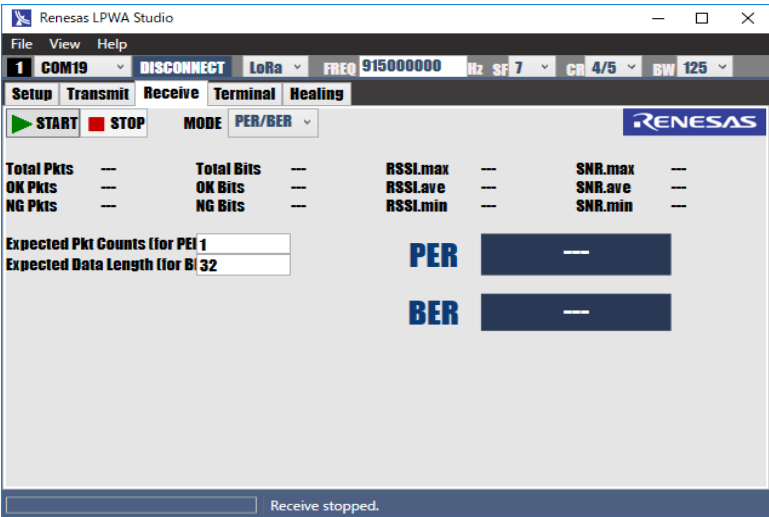

Reception mode (PER/BER)

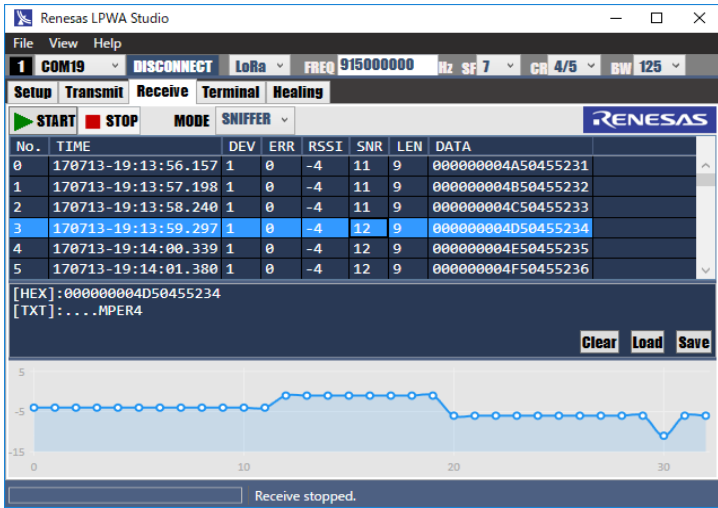


Reception mode (Sniffer)

Renesas LPWA Studio: <https://www.renesas.com/node/1400056>

Evaluation Tool

Renesas Power Estimator

- Evaluation tool to estimate the average current consumption and battery life in case of the intermittent operation (frame transmission/reception, low power mode, etc).
- Shows the current consumption and battery life after the interval of the intermittent operation, the periods for each state, the operation voltage, and the battery capacity are input to the tool.

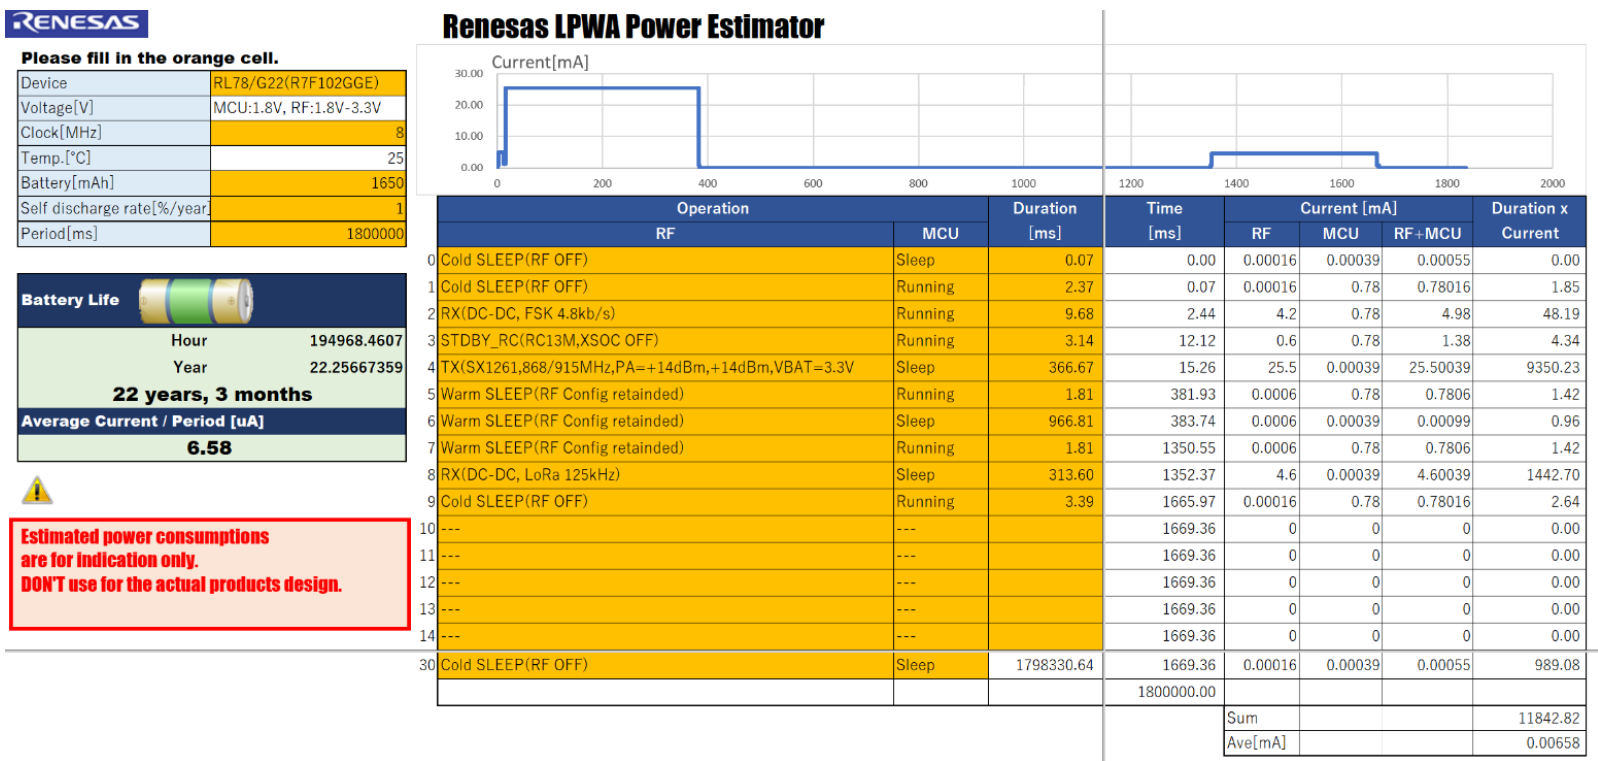

Renesas Power Estimator: <https://www.renesas.com/node/704381>


Example of Application

LoRaWAN® Sensor Demo

- Application note, LoRaWAN® Sensor Demo, introduces you how to visualize sensor data transmitted by the RL78 Sensor Node to the Cloud (AWS/Azure) via LoRaWAN® networks.

- Contents**

- How to setup the evaluation board and demo application
- How to setup the LoRaWAN® gateway
- How to setup the LoRaWAN® network server
- How to setup of the cloud server (AWS/Azure)

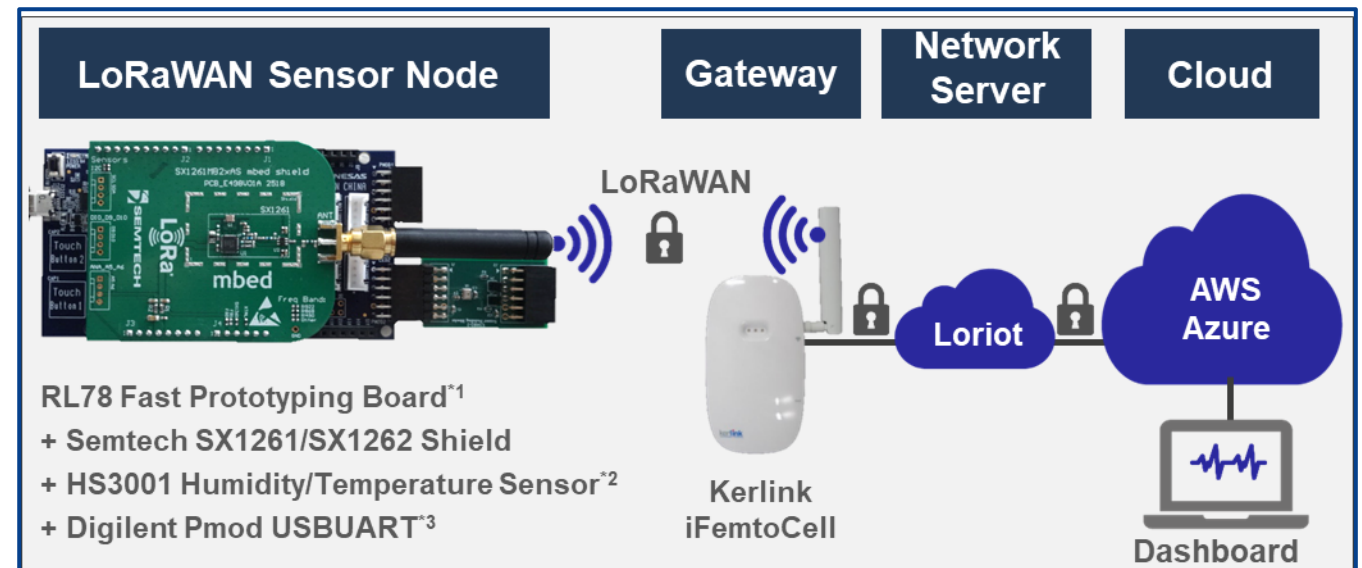

*1: Refer to the page for the evaluation boards.

*2: HS3001 has been obsolete. For details about the replacement devices, etc., please refer to [PLC# : 250010 End-of- Life \(EOL\) process on select part numbers](#).

*3: Required for the evaluation board that does not have USB-UART.

RL78/G23, RL78/G22, RL78/L23, RL78/G14 LoRaWAN® Sensor Demo
<https://www.renesas.com/node/1538231>

Software Development Environment

Software Development Environment

Hardware


- The software development environment consists of the Fast Prototyping Board for RL78/G23-64p, RL78/G23-128p, RL78/G22 or RL78/G14, and the Semtech SX1261/1262 Shield.
- The development and evaluation of applications can be started immediately by using the providing software.



RL78/G23-64p
Fast Prototyping Board
+ SX1261/SX1262 Shield
+ HS3001 Humidity Sensor



RL78/G23-128p
Fast Prototyping Board
+ SX1261/SX1262 Shield
+ HS3001 Humidity Sensor

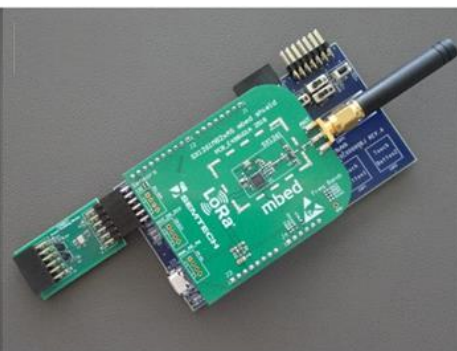

RL78/G22
Fast Prototyping Board
+ SX1261/SX1262 Shield
+ HS3001 Humidity Sensor



RL78/L23
Fast Prototyping Board
+ SX1261/SX1262 Shield
+ HS3001 Humidity Sensor



RL78/G14
Fast Prototyping Board
+ SX1261/SX1262 Shield
+ HS3001 Humidity Sensor

RL78/G23-64p Fast Prototyping Board (RTK7RLG230CLG000BJ)(https://www.renesas.com/rl78g23-64p_fpb)

RL78/G23-128p Fast Prototyping Board (RTK7RLG230CSN000BJ)(https://www.renesas.com/rl78g23-128p_fpb)

RL78/G22 Fast Prototyping Board (RTK7RLG220C00000BJ)(https://www.renesas.com/rl78g22_fpb)

RL78/L23 Fast Prototyping Board (RTK7RLL230S00001BJ) (<https://www.renesas.com/fpb-rl78l23>)

RL78/G14 Fast Prototyping Board (RTK5RLG140C00000BJ) (<https://www.renesas.com/rl78fpb>)

HS3001 has been obsolete. For details about the replacement devices, etc., please refer to [PLC# : 250010 End-of- Life \(EOL\) process on select part numbers](#).

Software Development Environment

Development Tool

- **CS+ (CC-RL Compiler)**
<https://www.renesas.com/en/software-tool/cs>
- **e² studio - information for RL78 Family (CC-RL Compiler)**
<https://www.renesas.com/en/software-tool/e2studio-information-rl78-family>
- **C Compiler Package for RL78 Family (CC-RL)**
<https://www.renesas.com/en/software-tool/c-compiler-package-rl78-family>
- **RL78 Smart Configurator**
<https://www.renesas.com/en/software-tool/rl78-smart-configurator>



CC-RL Evaluation Edition: Trial Period 60 Days
<https://www.renesas.com/en/software-tool/compiler-licenses>

Software Development Environment


RL78 Smart Configurator*1

- RL78 Smart Configurator automatically generates initial-setting programs for MCUs. It provides a quick and smart way of combining and configuring software to meet your needs, such as by configuring peripheral pins and importing middleware and drivers.
- LoRa®-based Wireless Software supports RL78 Smart Configurator*2. Application programs can be developed in combination with LoRa®-based Wireless Software and the driver code generated by RL78 Smart Configurator*3.

Generating Driver Code


The Smart Configurator provides you with a GUI environment for generating driver code that handles the details of the settings of peripheral modules.

Clock settings

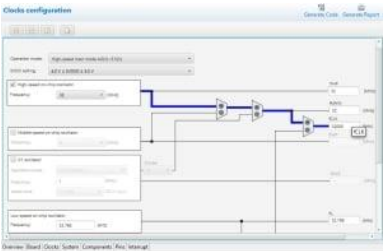

You can make clock settings by selecting a clock source and making connections in the block diagram.

Component settings

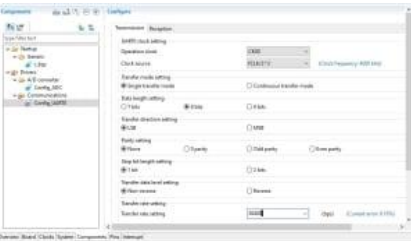


You can make settings for peripheral modules. After selecting the module you wish to set up for use, you can check for errors in settings (with some types indicated on the display) or switch the channels for use by drivers of multi-channel modules.

Pin Settings


The assignments of pins can be set up through a GUI, which also checks and offers solutions for cases of contention for the same pin by multiplexed functions.

[Pins Configuration] window (displayed per peripheral module)

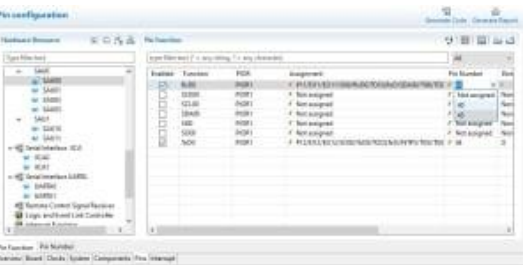


Specifying a peripheral module in the window displays the pin functions for use by the module and allows you to set the assignment of the functions to pins.

[MCU Package] window



Displays a symbolic view of the pins, indicating by colors which pins are and are not in use, which have been assigned contending multiplexed functions, and so on. This makes it easy to check the overall situation.

Automatic resolution of contention between pin functions

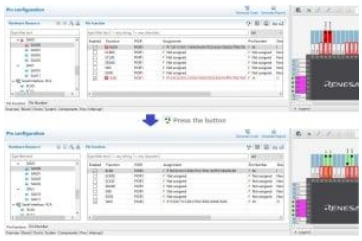

In cases of contention for a pin, clicking on the pin brings up a list allowing automatic changing of the assignment of the pin to resolve the contention.

*1) [RL78 Smart Configurator](#), *2) Supports RL78/G23, RL78/L23 and RL78/G22, *3) [Smart Configurator Usage for RL78 LoRa®-based Wireless Software Reference Guide](#).

LoRaWAN® Evaluation Environment

- To try to evaluate LoRaWAN® communication, LoRaWAN® gateway and LoRaWAN® network server need to be prepared.
 - For LoRaWAN® gateway, LoRaWAN®-compatible product is necessary.
 - For LoRaWAN® network server, some vendors offer services that are free to try for proof-of-concept purposes.
 - LoRaWAN® network server can be connected to cloud services.
 - Some of cloud services support LoRaWAN® network server.



LoRa®-based Solutions Web Pages

- LoRa®-based Solutions Web Page
<https://www.renesas.com/us/en/application/communication-computing-infrastructure/wireless-network/lora-solutions/>
- LoRa®-based Solutions for RL78 Family Web Page
<https://www.renesas.com/us/en/application/communication-computing-infrastructure/wireless-network/lora-solutions/lora-solution-rl>
- Video: RL78 LoRa®-based Solutions
<https://www.renesas.com/us/en/video/rl78-lora-based-solution>
- Video: RL78 LoRaWAN® Sensor Demo Tutorial
<https://www.renesas.com/us/en/video/rl78-lorawan-sensor-demo-tutorial>
- Blog: Would You Like to Use a LoRa®-Based Solution from Renesas to Develop IoT Applications with Low Power Consumption?
<https://www.renesas.com/us/en/blogs/would-you-use-lora-based-solution-renesas-develop-iot-applications-low-power-consumption>

LoRa®-based Solutions



LoRa®-based Solutions Make Low-Power Wide-Area
Networks Possible

Appendix

Memory Size

Memory Size Unit: KiB(=1024Bytes)

Application	RL78/G23-64p FPB*1		RL78/G23-128p FPB*1		RL78/G22 FPB*1		RL78/L23 FPB*1		RL78/G14 FPB*1	
	ROM	RAM	ROM	RAM	ROM	RAM	ROM	RAM	ROM	RAM
LoRaSample*2 *3 *4	61.8	5.1	61.8	5.1	54.0	3.8	61.9	5.1	66.8	5.6
LoRaFuotaSample*2 *3 *5	N/A	N/A	100.5	25.8	N/A	N/A	100.9	26.1	90.9	24.7
LoRaSensorSample*2 *3 *6	N/A	N/A	64.3	5.1	56.8	3.8	64.5	5.1	69.2	5.6
LoRaWanPrivateLoRaComboSample*2 *3 *7	83.9	6.0	83.9	6.0	N/A	N/A	84.0	6.0	88.9	6.5
PrivateLoRaSample*2 *8	51.6	3.5	51.6	3.5	48.4	3.4	51.7	3.5	55.1	3.9
RadioEvalApp*2 *8	41.2	4.2	41.3	4.2	39.6	4.0	41.5	4.2	46.8	4.7
Radio Driver Only*8	14.4	0.6	14.5	0.6	13.8	0.6	14.6	0.6	16.1	0.6
LoRaWAN MAC Only*3	26.0	2.3	26.0	2.3	22.6	1.6	26.0	2.3	26.0	2.3

Software: RL78/G23, RL78/G22, RL78/L23, RL78/G14 LoRa®-based Wireless Software Package V4.80. RL78/G23, RL78/G22, RL78/L23, RL78/G14 LoRaWAN® Sensor Demo V2.80.

Tool: Compiler: CC-RL V1.15.01: Optimize options: -Osize, -goptimize, -OPTimize=Symbol delete, Memory model: Medium (RL78/G23, RL78/L23, RL78/G14), Small (RL78/G22)

RL78 Smart Configurator: V1.14.0 (RL78/G23, RL78/G22, RL78/L23)

Note1: FPB stands for Fast Prototyping Board.

Note2: Stack size (1.0KiB) is included in the RAM size.

Note3: LoRaWAN V1.0.4, Class A/C, multicast and region EU868 are enabled. An additional ROM(9.7KiB) / RAM(0.3KiB) are required when Class B is enabled. (RL78/G23, RL78/L23, RL78/G14)
LoRaWAN V1.0.4, Class A/C and region EU868 are enabled, and Class B and multicast are not supported. (RL78/G22)

Note3: ROM/RAM sizes include LoRaWAN MAC, Radio Driver, and the lower layer's code required by LoRaSample.

An additional ROM(11.1KiB(RL78/G23, RL78/L23), 11KiB(RL78/G14)) / RAM(0.3KiB) are required when Class B is enabled.

Note5: ROM/RAM sizes include LoRaWAN MAC, Radio Driver, and the lower layer's code required by LoRaFuotaSample. RAM size also includes the fragment data block buffer for FUOTA (16KiB).

An additional ROM(11.5KiB(RL78/G23, RL78/L23), 11.6KiB(RL78/G14)) / RAM(0.5KiB(RL78/G23, RL78/L23), 0.3KiB(RL78/G14)) are required when Class B is enabled.

Note6: ROM/RAM sizes include LoRaWAN MAC, Radio Driver, and the lower layer's code required by LoRaSensorSample.

An additional ROM(11.0KiB) / RAM(0.3KiB) are required when Class B is enabled.

Note7: ROM/RAM sizes include LoRaWAN MAC, Radio Driver, and the lower layer's code required by LoRaWanPrivateLoRaComboSample.

An additional ROM(11KiB) / RAM(0.3KiB) are required when Class B is enabled.

Note8: ROM/RAM size includes .RLIB, .SLIB and the lower layer's code required by PrivateLoRaSample, RadioEvalApp, or Radio driver.

An additional ROM(4.7KiB(RL78/G23, RL78/L23, RL78/G14), 4.5 KiB(RL78/G22)) / RAM(0.1 KiB) are required when regulatory function is enabled.

Appendix

Peripheral Resource Usage

Resources	Function	RL78/G23-64p FPB*1	RL78/G23-128p FPB*1	RL78/G22 FPB*1	RL78/L23 FPB*1	RL78G/14 FPB*1
Timer	----	TML32 TAU02	TML32 TAU02	TML32 TAU02	TML32 TAU02	RTC Timer RJ 12bit IT
SX126x	CLK MISO MOSI ANTSW NSS DIO1 BUSY XTAL_SEL DEVICE_SEL FREQ_SEL NRESET	SCK11(P30) SI11(P50) SO11(P51) OUT(P73) OUT(P76) INTP11(P77) IN(P42) IN(P25) IN(P24) IN(P23/RFU) OUT(P22)	SCK11(P95) SI11(P96) SO11(P97) OUT(P42) OUT(P46) INTP11(P77) IN(P106) IN(P147) IN(P117) IN(P116/RFU) OUT(P115)	SCK20(P15) SI20(P14) SO20(P13) OUT(P17) OUT(P146) INTP6(P140) IN(P31) IN(P25) IN(P26) IN(P27/RFU) OUT(P147)	SCK31(P140) SI31(P46) SO31(P47) OUT(P62) OUT(P80) INTP7(P02) IN(P01) IN(P24) IN(P25) IN(P26/RFU) OUT(P27)	SCK31(P54) SI31(P53) SO31(P52) OUT(P03) OUT(P02) INTP11(P77) IN(P75) IN(P23) IN(P24) IN(P25/RFU) OUT(P26)
UART	Tx Rx	TxD0(P12) RxD0(P11)	TxD0(P12) RxD0(P11)	TxD0(P12) RxD0(P11)	TxDA0(P84) RxDA0(P83)	TxD0(P51) RxD0(P50)
I ² C for sensor (Option)	SCL SDA	SCLA1(P62) SDAA1(P63)	SCLA1(P62) SDAA1(P63)	SCL21(P70) SDA21(P71)	SCL10(P66) SDA10(P41)	SCLA0(P14) SDAA0(P15)

*1) FPB stands for Fast Prototyping Board

[Renesas.com](https://www.renesas.com)

- Semtech, LoRa[®], and LoRaWAN[®] are registered trademarks of Semtech Corporation.