

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

DC to VHF WIDEBAND DIFFERENTIAL INPUT AND OUTPUT AMPLIFIER IC

DESCRIPTION

The μPC1663 is a differential input, differential output wideband amplifier IC that uses an high frequency silicon bipolar process. This process improves bandwidth phase characteristics, input noise voltage characteristics, and low power consumption when compared to conventional HF-band differential amplifier ICs.

These features make this device suitable as a wideband amplifier in high-definition TVs, high-resolution monitors, broadcasting satellite receivers, and video cameras, as a sense amplifier in high-density CCD and optical pick-up products, or as a pulse amplifier for optical data links.

These ICs are manufactured using NEC's 6 GHz fr NESAT™ I silicon bipolar process. This process uses silicon nitride passivation film and gold electrodes. These materials can protect chip surface from external pollution and prevent corrosion/migration. Thus, these ICs have excellent performance, uniformity and reliability.

FEATURES

- Bandwidth and typical gain: 120 MHz @ $A_{VOL} = 300$
700 MHz @ $A_{VOL} = 10$
- Phase delay : -85 deg. @ $A_{VOL} = 100, 100$ MHz
- Input Noise Voltage : $3 \mu V_{r.m.s.}$ ($R_s = 50 \Omega, 10 k$ to 10 MHz)
- Supply Current : 13mA TYP. @ $V_{CC}^{\pm} = \pm 6 V$
- Gain adjustable from 10 to 300 with external resistor
- No frequency compensation required (Small phase delay at 10 MHz or less)

ORDERING INFORMATION

Part Number	Package	Marking	Supplying Form
μPC1663G-E1	8-pin plastic SOP (225 mil)	1663	Embossed tape 12 mm wide. Pin 1 is in tape pull-out direction. Qty 2.5 kp/reel.
μPC1663GV-E1	8-pin plastic SSOP (175 mil)		Embossed tape 8 mm wide. Pin 1 is in tape pull-out direction. Qty 1 kp/reel.


Remark To order evaluation samples, please contact your local NEC sales office. (Part number for sample order: μPC1663G, μPC1663GV)

Caution μPC1663C (8-pin plastic DIP) is discontinued.

Caution Electro-static sensitive devices

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

CONNECTION DIAGRAM

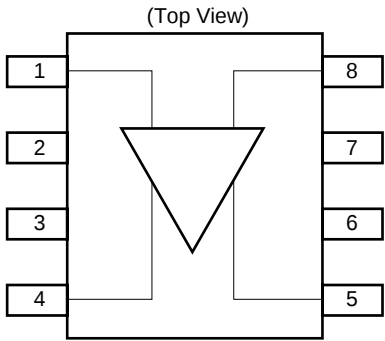

Pin No.	Pin Name
1	IN ₂
2	G _{1B}
3	V _{CC} ⁻
4	OUT ₂
5	OUT ₁
6	V _{CC} ⁺
7	G _{1A}
8	IN ₁

PIN EXPLANATIONS

Pin No.	Pin Name	In Dual Bias (V)	In Single Bias (V)	Functions and Applications	Internal Equivalent Circuit
8 1	IN ₁ IN ₂	Pin voltage 0	Apply voltage V _{CC} /2	Input pin	Internal circuit constants should be referred to application note.
5 4	OUT ₁ OUT ₂	Pin voltage 0	Apply voltage V _{CC} /2	Output pin	
6	V _{CC} ⁺	±2 to ±6.5	-0.3 to +14	Plus voltage supply pin. This pin should be connected with bypass capacitor to minimize AC impedance.	
3	V _{CC} ⁻		GND	Minus voltage supply pin. This pin should be connected with bypass capacitor to minimize AC impedance.	
7 2	G _{1A} G _{1B}	—	—	Gain adjustment pin. External resistor from 0 to 10 kΩ can be inserted between pin 2 and 7 to determine gain value.	

Note μPC1664 which had G_{2A}, G_{2B} of the other gain adjustment pins is discontinued.

ABSOLUTE MAXIMUM RATINGS (T_A = +25 °C)

Parameter	Symbol	μPC1663G	μPC1663GV	Unit
Supply Voltage	V _{CC} [±]	±7	±7	V
Power Dissipation	P _D	280 (T _A = +75°C) ^{Note}	280 (T _A = +75 °C) ^{Note}	mW
Differential Input Voltage	V _{ID}	±5	±5	V
Input Voltage	V _{ICM}	±6 (within V _{CC} ⁻ to V _{CC} ⁺ range)	±6 (within V _{CC} ⁻ to V _{CC} ⁺ range)	V
Output Current	I _O	35	35	mA
Operating Ambient Temperature	T _A	-45 to +75	-45 to +75	°C
Storage Temperature	T _{stg}	-55 to +150	-55 to +150	°C

Note Mounted on double sided copper clad 50 × 50 × 1.6 mm epoxy glass PWB

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{CC} [±]	±2	±6	±6.5	V
Output Source Current	I _{O source}	—	—	20	mA
Output Sink Current	I _{O sink}	—	—	2.5	mA
Operating Frequency Range	f _{opt}	DC	—	200	MHz


ELECTRICAL CHARACTERISTICS ($T_A = +25\text{ }^{\circ}\text{C}$, $V_{CC}^{\pm} = \pm 6\text{ V}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Differential Voltage Gain	Gain 1	A_{vd}	$f = 10\text{ MHz}$ ^{Note 1}	200	320	500	—
	Gain 2		$f = 10\text{ MHz}$ ^{Note 2}	8	10	12	
Bandwidth	Gain 1	BW	$R_S = 50\text{ }\Omega$ (3 dB down point)	—	120	—	MHz
	Gain 2			—	700	—	
Rise Time	Gain 1	t_r	$R_S = 50\text{ }\Omega$, $V_{out} = 1\text{ V}_{P-P}$	—	2.9	—	ns
	Gain 2			—	2.7	—	
Propagation Delay	Gain 1	t_{pd}	$R_S = 50\text{ }\Omega$, $V_{out} = 1\text{ V}_{P-P}$	—	2	—	ns
	Gain 2			—	1.2	—	
Input Resistance	Gain 1	R_{in}		—	4.0	—	k Ω
	Gain 2			50	180	—	
Input Capacitance		C_{in}		—	2	—	pF
Input Offset Current		I_{IO}		—	0.4	5.0	μA
Input Bias Current		I_B		—	20	40	μA
Input Noise Voltage		V_n	$R_S = 50\text{ }\Omega$, 10 k to 10 MHz	—	3	—	$\mu\text{V}_{r.m.s.}$
Input Voltage Range		V_I		± 1.0	—	—	V
Common Mode Rejection Ratio	Gain 2	CMR	$V_{cm} = \pm 1\text{ V}$, $f \leq 100\text{ kHz}$	53	94	—	dB
Supply Voltage Rejection Ratio		SVR	$\Delta V = \pm 0.5\text{ V}$	50	70	—	dB
Output Offset Voltage	Gain 1	$V_{O(off)}$	$V_{O(off)} = OUT_1 - OUT_2 $	—	0.3	1.5	V
	Gain 2			—	0.1	1.0	
Output Common Mode Voltage		$V_{O(CM)}$		2.4	2.9	3.4	V
Output Voltage Swing		V_{OP-P}	Single-ended	3.0	4.0	—	V_{P-P}
Output Sink Current		I_{sink}		2.5	3.6	—	mA
Power Supply Current		I_{CC}		—	13	20	mA

Notes 1. Gain select pins G_{1A} and G_{1B} are connected.

2. All gain select pins are opened.


TEST CIRCUIT

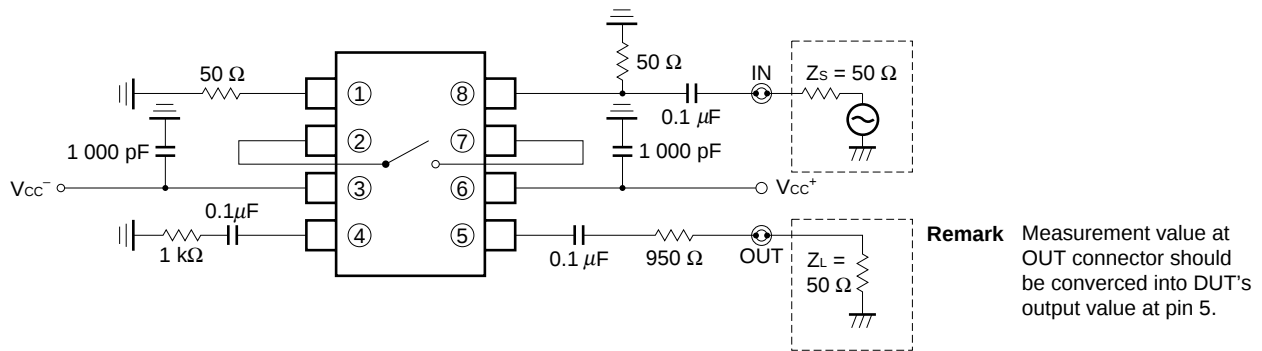

Remark Definition and test circuit of each characteristic should be referred to application note 'Usage of μ PC1663 (Document No. G12290E)'.


NOTES ON CORRECT USE

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as wide as possible to minimize ground impedance (to prevent undesired oscillation).
- (3) The bypass capacitor should be attached to V_{CC} line.
- (4) When gain between Gain 1 and Gain 2 is necessary, insert adjustment resistor (0 to 10 k Ω) between G_{1A} and G_{1B} to determine gain value.
- (5) Due to high-frequency characteristics, the physical circuit layout is very critical. Supply voltage line bypass, double-sided printed-circuit board, and wide-area ground line layout are necessary for stable operation. Two signal resistors connected to both inputs and two load resistors connected to both outputs should be balanced for stable operation.

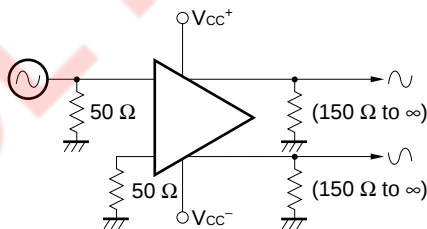


TYPICAL CHARACTERISTICS (Unless otherwise specified $T_A = +25\text{ }^{\circ}\text{C}$)

SINGLE-ENDED VOLTAGE GAIN vs. FREQUENCY

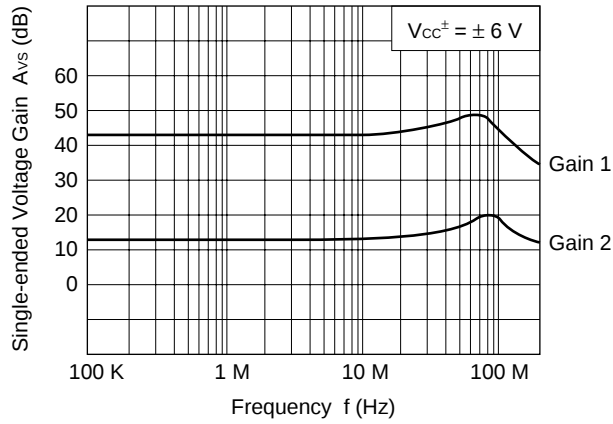


Remark Differential voltage gain is double of single-ended voltage gain.


RELATIVE VOLTAGE GAIN vs. OPERATING AMBIENT TEMPERATURE

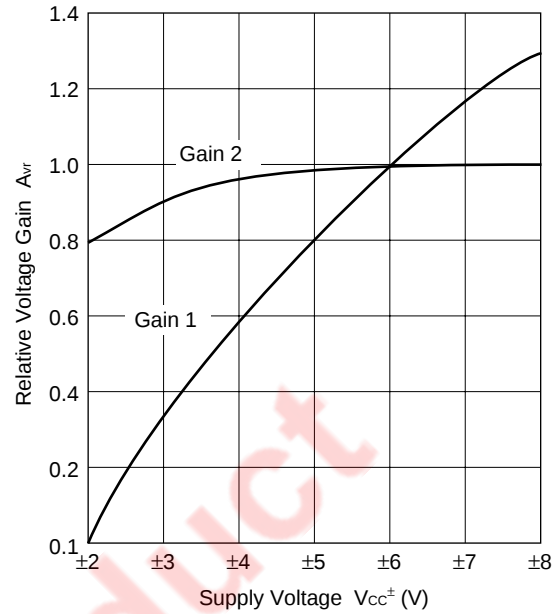

RELATIVE GAIN vs. OPERATING AMBIENT TEMPERATURE

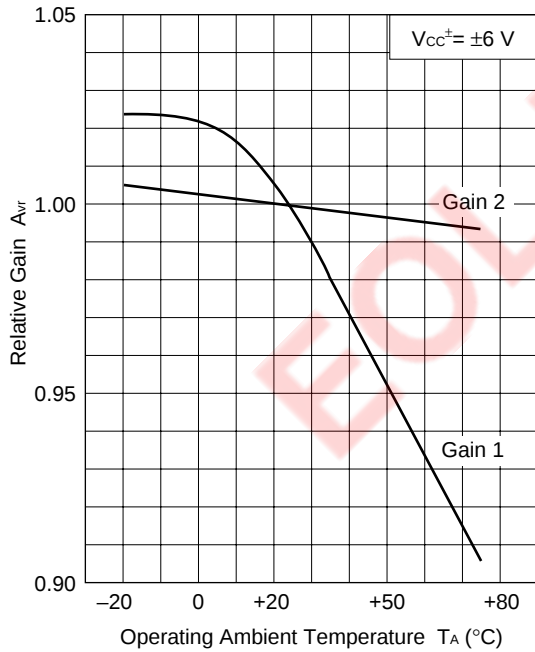


OUTPUT SINK CURRENT vs. OPERATING AMBIENT TEMPERATURE

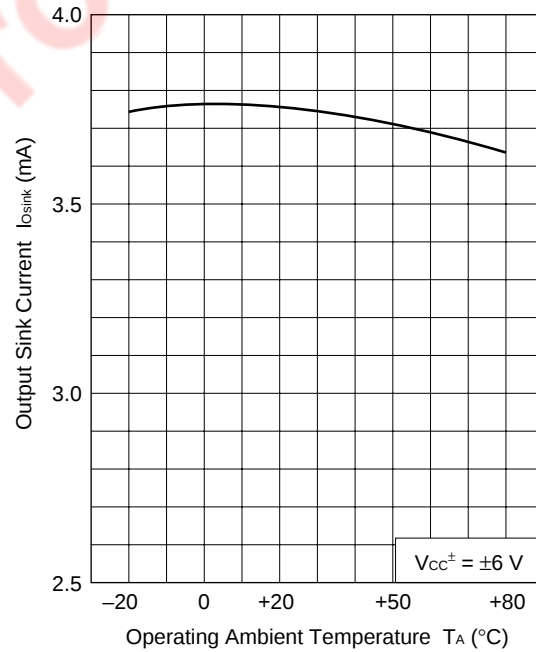


Remark Relative voltage gains are described based on gains 1.00 at $T_A = +25\text{ }^{\circ}\text{C}$, $V_{CC}^{\pm} = \pm 6\text{ V}$


SINGLE-ENDED OUTPUT VOLTAGE SWING vs.
OPERATING AMBIENT TEMPERATURE

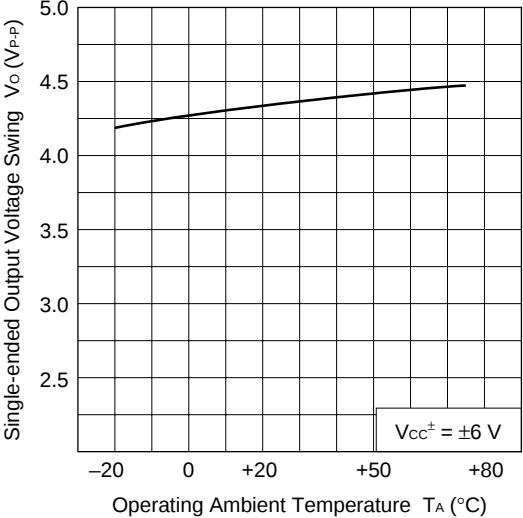


DIFFERENTIAL VOLTAGE GAIN vs. GAIN ADJUST
RESISTANCE

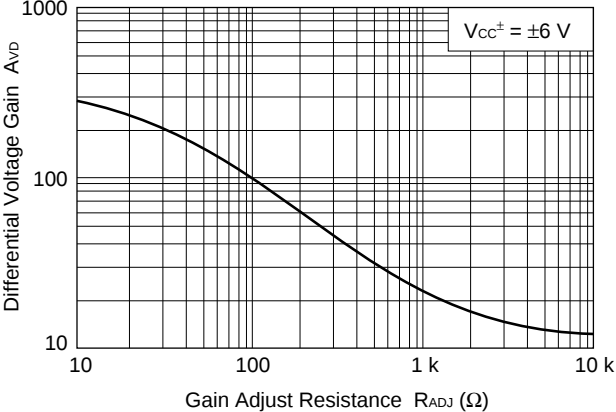


INPUT BIAS CURRENT vs.
OPERATING AMBIENT TEMPERATURE

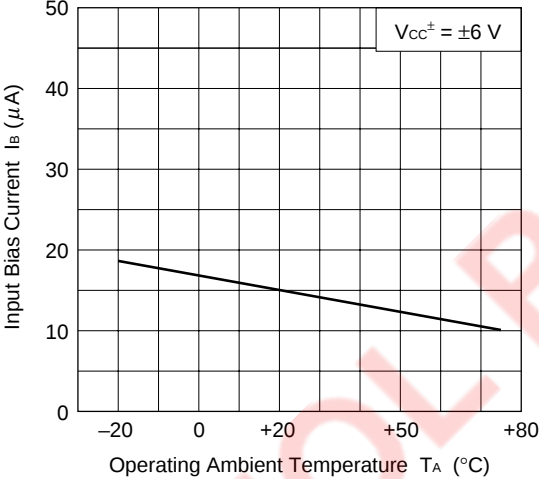

SUPPLY CURRENT vs.
OPERATING AMBIENT TEMPERATURE

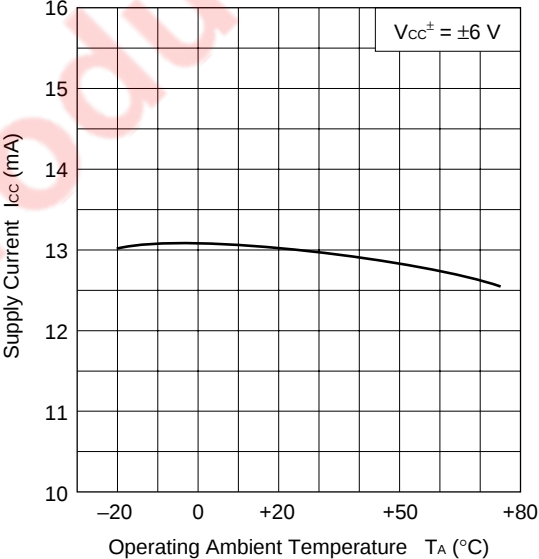


SUPPLY CURRENT vs. SUPPLY VOLTAGE

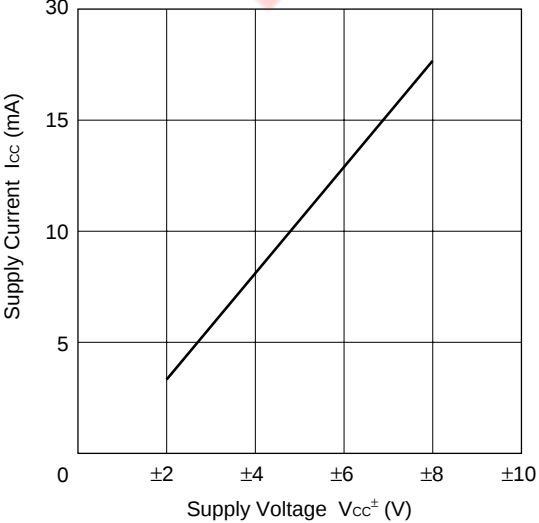


APPLICATION CIRCUIT EXAMPLES

EXAMPLE 1

Video Line Driver Circuit Example

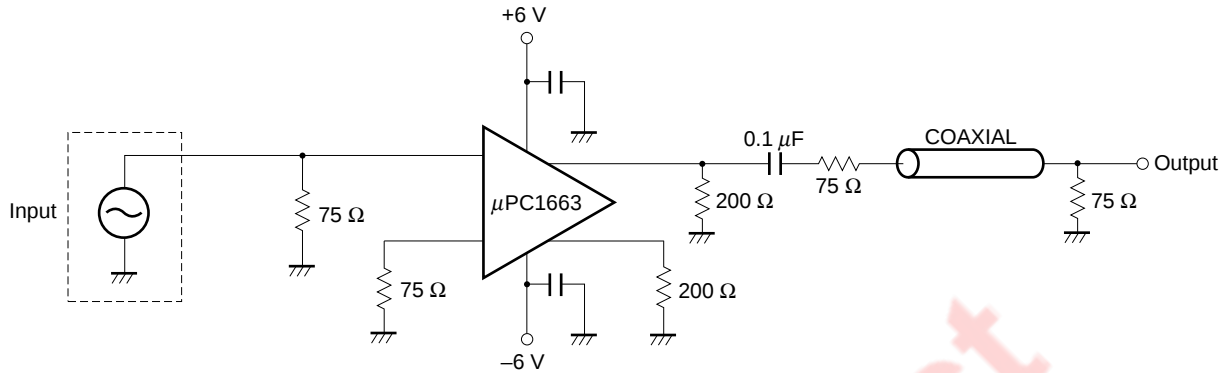


MAXIMUM OUTPUT VOLTAGE vs. FREQUENCY (VIDEO LINE, SINGLE-ENDED)

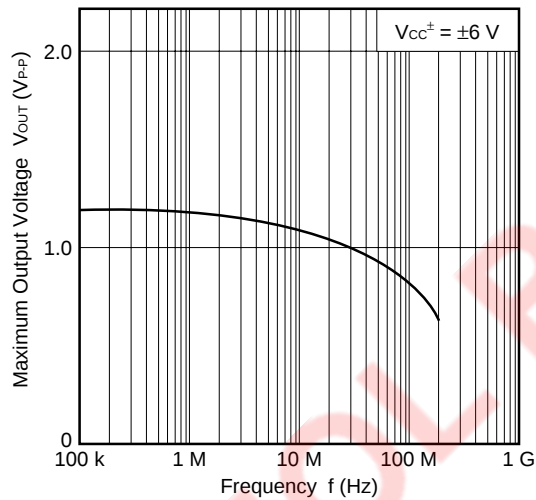

Remark


Differential output voltage is double of single-ended output voltage.

PHASE CHARACTERISTICS vs. FREQUENCY

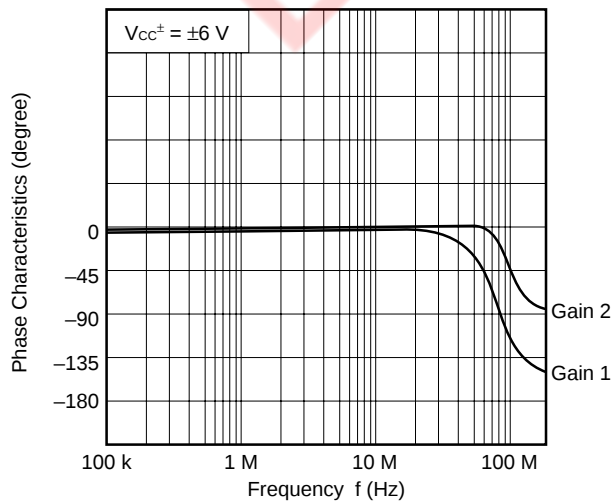


EXAMPLE 2

V_{CC} single supply application example (Outline)

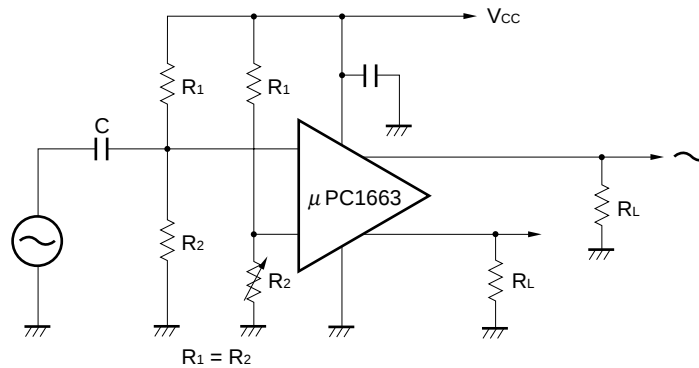

EXAMPLE 3

Photo signal detector circuit example (Outline)

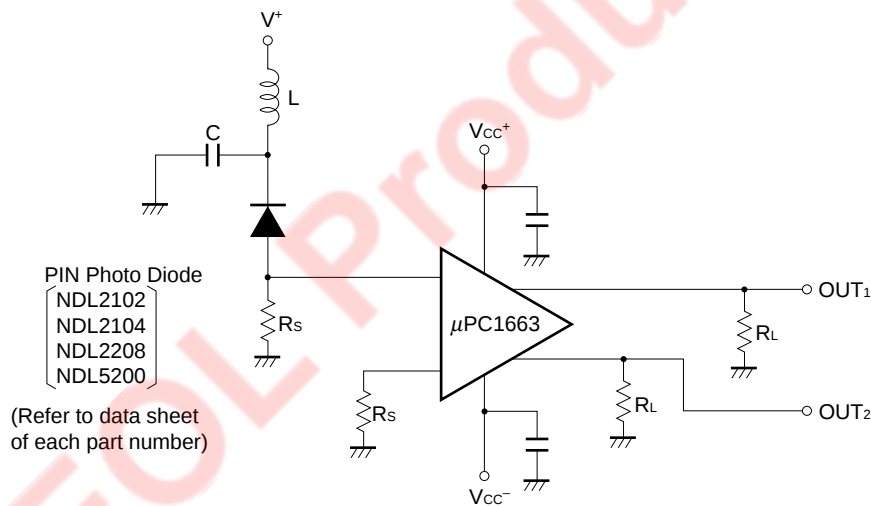

Caution When signal source impedance for μ PC1663 is critical, FET source follower buffer should be inserted between PIN Photo diode and μ PC1663 input.


The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.

Precautions for design in and detail application circuit examples should be referred to application note 'Usage of μ PC1663 (Document No. G12290E)'.

PACKAGE DIMENSIONS

★ 8 PIN PLASTIC SOP (225 mil) (Unit: mm)

– μPC1663G –

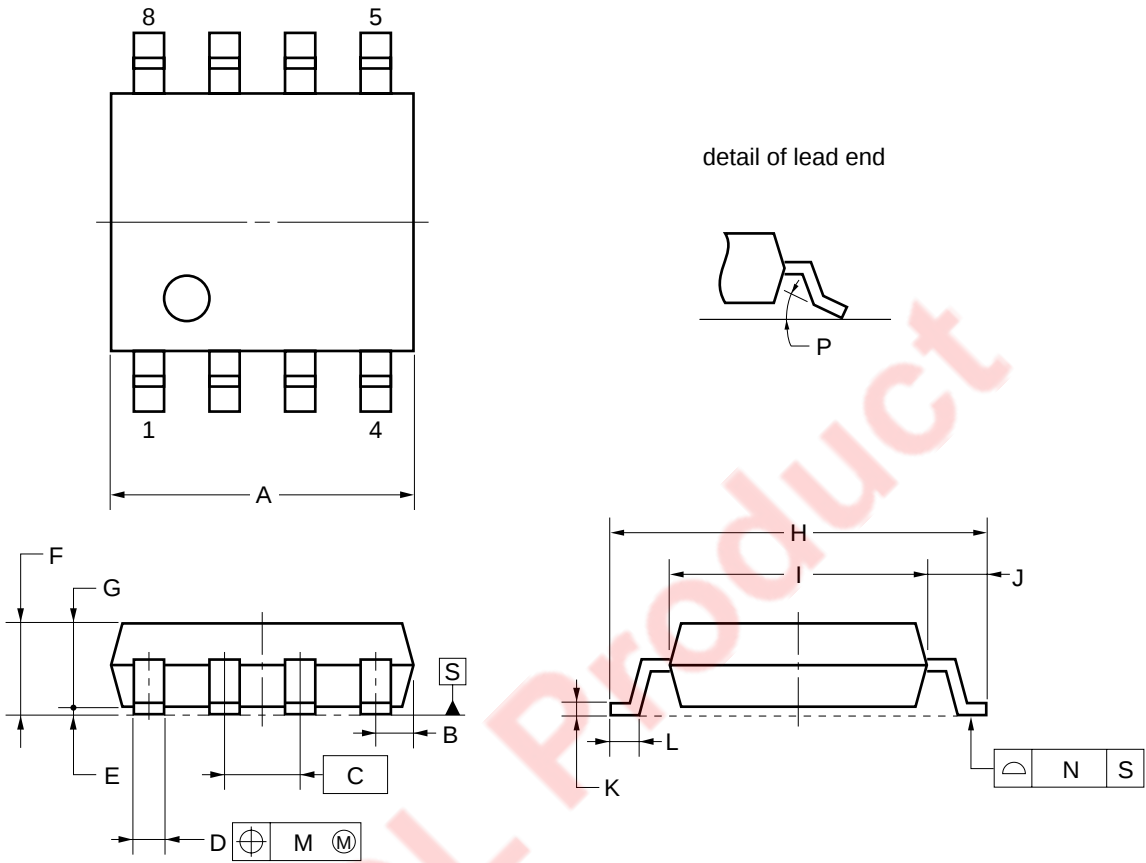


NOTE
Each lead centerline is located within 0.12 mm of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS
A	5.2±0.2
B	0.85 MAX.
C	1.27 (T.P.)
D	0.42 ^{+0.08} _{-0.07}
E	0.1±0.1
F	1.57±0.2
G	1.49
H	6.5±0.3
I	4.4±0.15
J	1.1±0.2
K	0.17 ^{+0.08} _{-0.07}
L	0.6±0.2
M	0.12
N	0.10
P	3° ^{+7°} _{-3°}

8 PIN PLASTIC SSOP (175 mil) (Unit: mm)

– μPC1663GV –

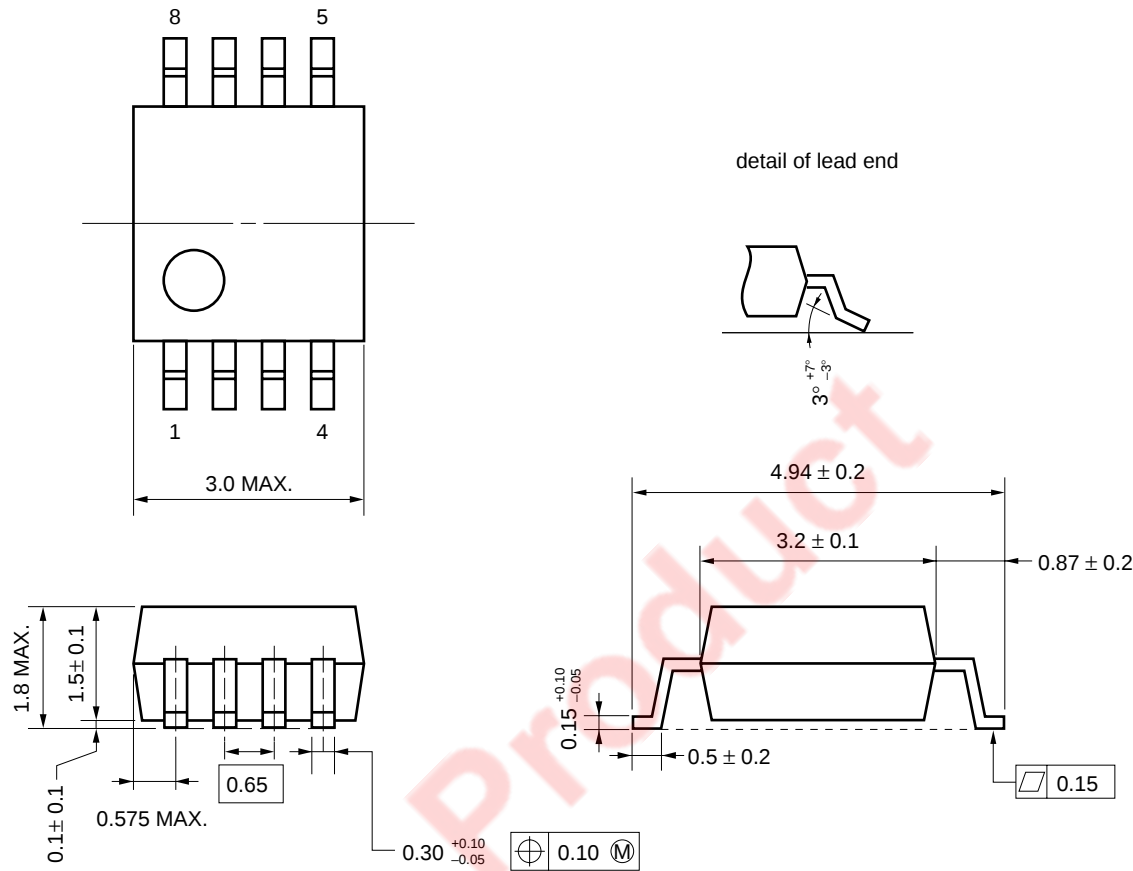

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your NEC sales representative.

Soldering Method	Soldering Conditions	Recommended Condition Symbol
Infrared Reflow	Package peak temperature: 235 °C or below Time: 30 seconds or less (at 210 °C) Count: 3, Exposure limit: None ^{Note}	IR35-00-3
VPS	Package peak temperature: 215 °C or below Time: 40 seconds or less (at 200 °C) Count: 3, Exposure limit: None ^{Note}	VP15-00-3
Wave Soldering	Soldering bath temperature: 260 °C or below Time: 10 seconds or less Count: 1, Exposure limit: None ^{Note}	WS60-00-1
Partial Heating	Pin temperature: 300 °C Time: 3 seconds or less (per side of device) Exposure limit: None ^{Note}	—

Note After opening the dry pack, keep it in a place below 25 °C and 65 % RH for the allowable storage period.

Caution Do not use different soldering methods together (except for partial heating).

For details of recommended soldering conditions for surface mounting, refer to information document SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL (C10535E)

[MEMO]


EOL Product

[MEMO]

EOL Product

[MEMO]

EOL Product



ATTENTION

OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

NESAT (NEC Silicon Advanced Technology) is a trademark of NEC Corporation.

- The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
 - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
 - NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
 - Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
 - While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
 - NEC devices are classified into the following three quality grades:
 "Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
 - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.
- The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.