


## General Description

The 8SLVP2106 is a high-performance differential dual 1:6 LVPECL fanout buffer. The device is designed for the fanout of high-frequency, very low additive phase-noise clock and data signals. The 8SLVP2106 is characterized to operate from a 3.3V or 2.5V power supply. Guaranteed output-to-output and part-to-part skew characteristics make the 8SLVP2106 ideal for those clock distribution applications demanding well-defined performance and repeatability. Two independent buffers with six low skew outputs each are available. The integrated bias voltage references enable easy interfacing of single-ended signals to the device inputs. The device is optimized for low power consumption and low additive phase noise.


## Block Diagram

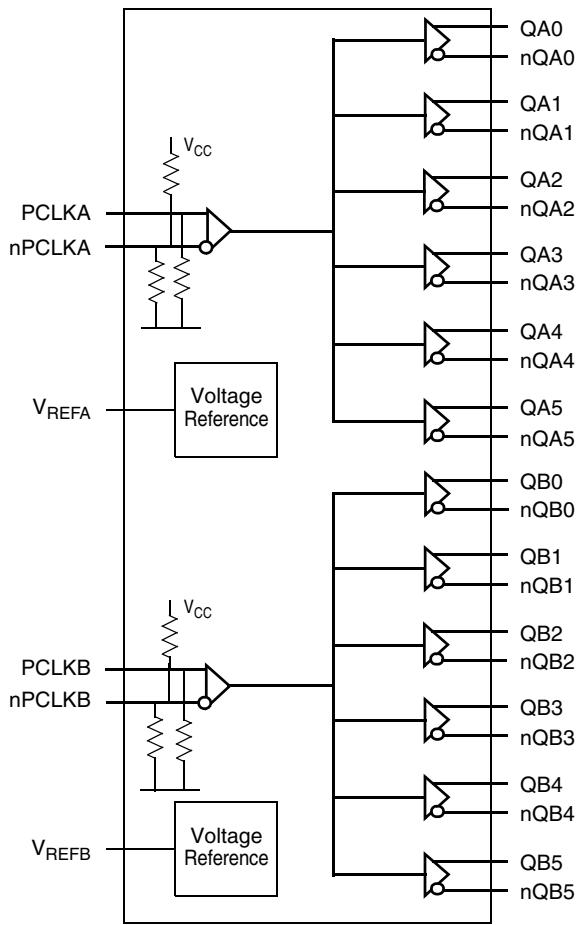

## Features

- Two 1:6, low skew, low additive jitter LVPECL fanout buffers
- Two differential clock inputs
- Differential PCLKA, nPCLKA and PCLKB, nPCLKB pairs can accept the following differential input levels: LVDS, LVPECL, CML
- Differential PCLKA, nPCLKA and PCLKB, nPCLKB pairs can also accept single-ended LVCMOS levels. See Applications section *Wiring the Differential Input Levels to Accept Single-ended Levels* (Figure 1A and Figure 1B).
- Maximum input clock frequency: 2GHz
- Output bank skew: 15ps (typical)
- Propagation delay: 340ps (maximum)
- Low additive phase jitter, RMS: 54fs (maximum)  
 $f_{REF} = 156.25\text{MHz}$ ,  $V_{PP} = 1\text{V}$ , 12kHz - 20MHz:  $V_{CC} = 3.3\text{V}$
- Full 3.3V and 2.5V supply voltage modes
- Maximum device current consumption ( $I_{EE}$ ): 114mA
- Available in Lead-free (RoHS 6), 40-Lead VFQFN package
- -40°C to 85°C ambient operating temperature
- Supports case temperature  $\leq 105^\circ\text{C}$  operations

## Pin Assignment

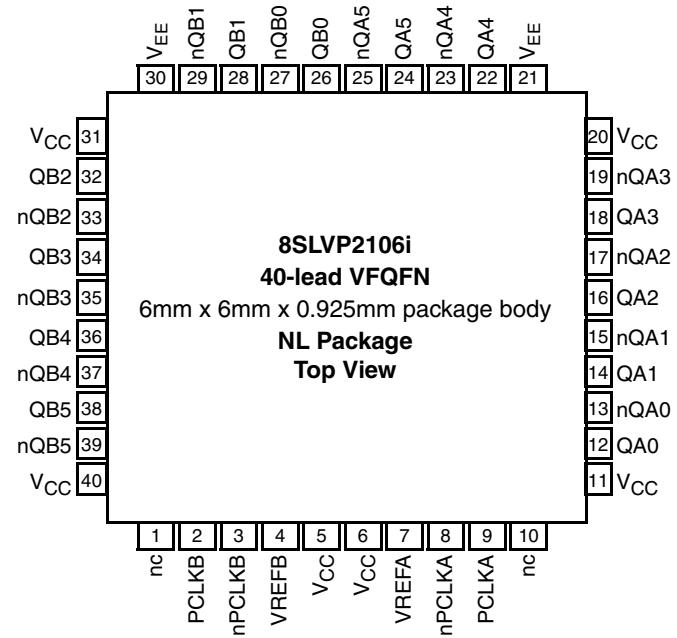

## Pin Descriptions and Characteristics

**Table 1. Pin Descriptions**

| Number                  | Name              | Type   | Description  |
|-------------------------|-------------------|--------|--|
| 1, 10                   | nc                | Unused | Do not connect.  |
| 2                       | PCLKB             | Input  | Pulldown   |
| 3                       | nPCLKB            | Input  | Pulldown/<br>Pullup                                      |
| 4                       | V <sub>REFB</sub> | Output | Bias voltage reference for the PCLKB, nPCLKB input pair. |
| 5, 6, 11, 20,<br>31, 40 | V <sub>CC</sub>   | Power  | Power supply pins.                                       |
| 7                       | V <sub>REFA</sub> | Output | Bias voltage reference for the PCLKA, nPCLKA input pair. |
| 8                       | nPCLKA            | Input  | Pulldown/<br>Pullup                                      |
| 9                       | PCLKA             | Input  | Pulldown   |
| 12, 13                  | QA0, nQA0         | Output | Non-inverting LVPECL differential clock/data input.      |
| 14, 15                  | QA1, nQA1         | Output | Differential output pair A0. LVPECL interface levels.    |
| 16, 17                  | QA2, nQA2         | Output | Differential output pair A1. LVPECL interface levels.    |
| 18, 19                  | QA3, nQA3         | Output | Differential output pair A2. LVPECL interface levels.    |
| 21, 30                  | V <sub>EE</sub>   | Power  | Differential output pair A3. LVPECL interface levels.    |
| 22, 23                  | QA4, nQA4         | Output | Negative supply pins.                                    |
| 24, 25                  | QA5, nQA5         | Output | Differential output pair A4. LVPECL interface levels.    |
| 26, 27                  | QB0, nQB0         | Output | Differential output pair A5. LVPECL interface levels.    |
| 28, 29                  | QB1, nQB1         | Output | Differential output pair B0. LVPECL interface levels.    |
| 32, 33                  | QB2, nQB2         | Output | Differential output pair B1. LVPECL interface levels.    |
| 34, 35                  | QB3, nQB3         | Output | Differential output pair B2. LVPECL interface levels.    |
| 36, 37                  | QB4, nQB4         | Output | Differential output pair B3. LVPECL interface levels.    |
| 38, 39                  | QB5, nQB5         | Output | Differential output pair B4. LVPECL interface levels.    |

NOTE: *Pulldown* and *Pullup* refer to internal input resistors. See Table 2, *Pin Characteristics*, for typical values.

**Table 2. Pin Characteristics**

| Symbol                | Parameter               | Test Conditions | Minimum | Typical | Maximum | Units |
|-----------------------|-------------------------|-----------------|---------|---------|---------|-------|
| C <sub>IN</sub>       | Input Capacitance       |                 |         | 2       |         | pF    |
| R <sub>PULLDOWN</sub> | Input Pulldown Resistor |                 |         | 51      |         | kΩ    |
| R <sub>PULLUP</sub>   | Input Pullup Resistor   |                 |         | 51      |         | kΩ    |

## Absolute Maximum Ratings

NOTE: Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of the product at these conditions or any conditions beyond those listed in the *DC Characteristics* or *AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

| Item   | Rating                   |
|--|--------------------------|
| Supply Voltage, $V_{CC}$                                       | 4.6V                     |
| Inputs, $V_I$  | -0.5V to $V_{CC} + 0.5V$ |
| Outputs, $I_O$ (LVPECL)<br>Continuous Current<br>Surge Current | 50mA<br>100mA            |
| Input Sink/Source, $I_{REF}$                                   | $\pm 2mA$                |
| Maximum Junction Temperature, $T_{J,MAX}$                      | 125 °C                   |
| Storage Temperature, $T_{STG}$                                 | -65°C to 150°C           |
| ESD - Human Body Model (NOTE 1)                                | 2000V                    |
| ESD - Charged Device Model (NOTE 1)                            | 1500V                    |

NOTE 1: According to JEDEC/JESD 22-A114/22-C101.

## DC Electrical Characteristics

**Table 3A. Power Supply DC Characteristics**,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40°C$  to  $85°C$

| Symbol   | Parameter            | Test Conditions  | Minimum | Typical | Maximum | Units |
|----------|----------------------|--|---------|---------|---------|-------|
| $V_{CC}$ | Power Supply Voltage |  | 3.135   | 3.3V    | 3.465   | V     |
| $I_{EE}$ | Power Supply Current |  |         | 94      | 114     | mA    |
| $I_{CC}$ | Power Supply Current | QA[0:5] and QB[0:5] terminated<br>50Ω to $V_{CC} - 2V$ |         | 503     | 569     | mA    |

**Table 3B. Power Supply DC Characteristics**,  $V_{CC} = 2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40°C$  to  $85°C$

| Symbol   | Parameter            | Test Conditions  | Minimum | Typical | Maximum | Units |
|----------|----------------------|--|---------|---------|---------|-------|
| $V_{CC}$ | Power Supply Voltage |  | 2.375   | 2.5V    | 2.625   | V     |
| $I_{EE}$ | Power Supply Current |  |         | 89      | 103     | mA    |
| $I_{CC}$ | Power Supply Current | QA[0:5] and QB[0:5] terminated<br>50Ω to $V_{CC} - 2V$ |         | 502     | 569     | mA    |

**Table 3C. LVPECL DC Characteristics,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$** 

| Symbol     | Parameter                        | Test Conditions                |  | Minimum         | Typical         | Maximum         | Units   |
|------------|----------------------------------|--------------------------------|--|-----------------|-----------------|-----------------|---------|
| $I_{IH}$   | Input High Current               | $V_{CC} = V_{IN} = 3.465V$     |  |                 |                 | 150             | $\mu A$ |
| $I_{IL}$   | Input Low Current                | $V_{CC} = 3.465V, V_{IN} = 0V$ |  | -10             |                 |                 | $\mu A$ |
|            |                                  | $V_{CC} = 3.465V, V_{IN} = 0V$ |  | -150            |                 |                 | $\mu A$ |
| $V_{REFx}$ | Reference Voltage for Input Bias | $I_{REF} = 2mA$                |  | $V_{CC} - 1.82$ | $V_{CC} - 1.48$ | $V_{CC} - 1.27$ | V       |
| $V_{OH}$   | Output High Voltage; NOTE 1      |                                |  | $V_{CC} - 1.05$ | $V_{CC} - 0.89$ | $V_{CC} - 0.72$ | V       |
| $V_{OL}$   | Output Low Voltage; NOTE 1       |                                |  | $V_{CC} - 1.50$ | $V_{CC} - 1.38$ | $V_{CC} - 1.26$ | V       |

NOTE:  $V_{REFx}$  denotes  $V_{REFA}$  and  $V_{REFB}$ .NOTE 1: Outputs terminated with  $50\Omega$  to  $V_{CC} - 2V$ .**Table 3D. LVPECL DC Characteristics,  $V_{CC} = 2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$** 

| Symbol     | Parameter                                | Test Conditions                |  | Minimum         | Typical         | Maximum         | Units   |
|------------|--|--------------------------------|--|-----------------|-----------------|-----------------|---------|
| $I_{IH}$   | Input High Current                       | $V_{CC} = V_{IN} = 2.625V$     |  |                 |                 | 150             | $\mu A$ |
| $I_{IL}$   | Input Low Current                        | $V_{CC} = 2.625V, V_{IN} = 0V$ |  | -10             |                 |                 | $\mu A$ |
|            |  | $V_{CC} = 2.625V, V_{IN} = 0V$ |  | -150            |                 |                 | $\mu A$ |
| $V_{REFx}$ | Reference Voltage for Input Bias; NOTE 2 | $I_{REF} = 2mA$                |  | $V_{CC} - 1.81$ | $V_{CC} - 1.47$ | $V_{CC} - 1.27$ | V       |
| $V_{OH}$   | Output High Voltage; NOTE 1              |                                |  | $V_{CC} - 1.05$ | $V_{CC} - 0.89$ | $V_{CC} - 0.73$ | V       |
| $V_{OL}$   | Output Low Voltage; NOTE 1               |                                |  | $V_{CC} - 1.48$ | $V_{CC} - 1.36$ | $V_{CC} - 1.23$ | V       |

NOTE:  $V_{REFx}$  denotes  $V_{REFA}$  and  $V_{REFB}$ .NOTE 1: Outputs terminated with  $50\Omega$  to  $V_{CC} - 2V$ .NOTE 2: For  $V_{CC} < 3V$ , the use of an alternate bias voltage source is recommended.

## AC Electrical Characteristics

Table 4A. AC Electrical Characteristics,  $V_{CC} = 3.3V \pm 5\%$  or  $2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$

| Symbol              | Parameter                                       | Test Conditions  | Minimum | Typical | Maximum        | Units |
|---------------------|---|--|---------|---------|----------------|-------|
| $f_{REF}$           | Input Frequency                                 | PCLKA, nPCLKA and PCLKB, nPCLKB  |         |         | 2              | GHz   |
| $\Delta V/\Delta t$ | Input Edge Rate                                 | PCLKA, nPCLKA and PCLKB, nPCLKB  | 1.5     |         |                | V/ns  |
| $t_{PD}$            | Propagation Delay; NOTE 1                       | PCLKA, nPCLKA to any QA <sub>x</sub> , nQA <sub>x</sub> or PCLKB, nPCLKB to any QB <sub>x</sub> , nQB <sub>x</sub> for $V_{PP} = 0.1V$ or $0.3V$     | 130     | 235     | 340            | ps    |
| $t_{sk(o)}$         | Output Skew; NOTE 2, 3                          |  |         | 26      | 60             | ps    |
| $t_{sk(b)}$         | Output Bank Skew; NOTE 3, 4                     |  |         | 15      | 42             | ps    |
| $t_{sk(p)}$         | Pulse Skew                                      | $f_{REF} = 100MHz$   |         | 6       | 26             | ps    |
| $t_{sk(pp)}$        | Part-to-Part Skew; NOTE 3, 5                    |  |         | 66      | 144            | ps    |
| $t_{JIT, SP}$       | Spurious Suppression, Coupling from QA5 to QB0  | $f_{QB0} = 500MHz$ , $V_{PP(PCLKB)} = 0.15V$ ,<br>$V_{CMR(PCLKB)} = 1V$ ;<br>$f_{QA5} = 62.5MHz$ , $V_{PP(PCLKA)} = 1V$ ,<br>$V_{CMR(PCLKA)} = 1V$   |         | -52     |                | dB    |
|                     |   | $f_{QB0} = 500MHz$ , $V_{PP(PCLKB)} = 0.15V$ ,<br>$V_{CMR(PCLKB)} = 1V$ ;<br>$f_{QA5} = 15.625MHz$ , $V_{PP(PCLKA)} = 1V$ ,<br>$V_{CMR(PCLKA)} = 1V$ |         | -63     |                | dB    |
| $t_R / t_F$         | Output Rise/ Fall Time; NOTE 6                  | 20% to 80%   | 60      | 100     | 170            | ps    |
| $V_{PP}$            | Differential Input Voltage; NOTE 7, 8           | $f_{REF} < 1.5GHz$   | 0.1     |         | 1.5            | V     |
|                     |   | $f_{REF} \geq 1.5GHz$  | 0.2     |         | 1.5            | V     |
| $V_{CMR}$           | Common Mode Input Voltage; NOTE 7, 8, 9         |  | 1.0     |         | $V_{CC} - 0.3$ | V     |
| $V_{O(pp)}$         | Output Voltage Swing, Peak-to-Peak              | $f_{REF} \leq 2GHz$ , $V_{CC} = 2.5V \pm 5\%$  | 0.31    | 0.46    | 0.62           | V     |
|                     |   | $f_{REF} \leq 2GHz$ , $V_{CC} = 3.3V \pm 5\%$  | 0.33    | 0.49    | 0.66           | V     |
| $V_{DIFF\_OUT}$     | Differential Output Voltage Swing, Peak-to-Peak | $f_{REF} \leq 2GHz$ , $V_{CC} = 2.5V \pm 5\%$  | 0.62    | 0.92    | 1.24           | V     |
|                     |   | $f_{REF} \leq 2GHz$ , $V_{CC} = 3.3V \pm 5\%$  | 0.66    | 0.98    | 1.32           | V     |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

NOTE 1: Measured from the differential input crosspoint to the differential output crosspoint.

NOTE 2: Defined as skew between outputs at the same supply voltage and with equal load conditions. Measured at the differential crosspoints.

NOTE 3: This parameter is defined in accordance with JEDEC Standard 65.

NOTE 4: Defined as skew within a bank of outputs at the same supply voltage and with equal load conditions. Measured at the differential crosspoints.

NOTE 5: Defined as skew between outputs on different devices operating at the same supply voltage, same frequency, same temperature and with equal load conditions. Using the same type of inputs on each device, the outputs are measured at the differential crosspoints.

NOTE 6: Characterized with input signal meeting the input edge rate minimum specification.

NOTE 7: For single-ended LVCMOS input applications, please refer to the Applications Information, *Wiring the Differential Input to Accept Single-ended Levels*, Figures 1A and 1B.

NOTE 8:  $V_{IL}$  should not be less than  $-0.3V$ .  $V_{IH}$  should not be higher than  $V_{CC}$ .

NOTE 9: Common mode input voltage is defined at the crosspoint.

**Table 4B. Buffer Additive Phase Jitter,  $t_{JIT}$ ,  $V_{CC} = 3.3V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$** 

| Symbol    | Parameter   | Test Conditions  | Minimum | Typical | Maximum | Units |
|-----------|---|--|---------|---------|---------|-------|
| $t_{JIT}$ | Buffer Additive Phase Jitter, RMS; refer to Additive Phase Jitter Section | $f_{REF} = 122.88\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 1kHz - 40MHz    |         | 98      | 113     | fs    |
|           |   | $f_{REF} = 122.88\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 10kHz - 20MHz   |         | 61      | 81      | fs    |
|           |   | $f_{REF} = 122.88\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 12kHz - 20MHz   |         | 61      | 81      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 1kHz - 40MHz    |         | 63      | 74      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 10kHz - 20MHz   |         | 46      | 55      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 12kHz - 20MHz   |         | 46      | 54      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 1kHz - 40MHz  |         | 54      | 72      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 10kHz - 20MHz |         | 42      | 55      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 12kHz - 20MHz |         | 42      | 55      | fs    |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfm. The device will meet specifications after thermal equilibrium has been reached under these conditions.

**Table 4C. Buffer Additive Phase Jitter,  $t_{JIT}$ ,  $2.5V \pm 5\%$ ,  $V_{EE} = 0V$ ,  $T_A = -40^\circ C$  to  $85^\circ C$** 


| Symbol    | Parameter   | Test Conditions  | Minimum | Typical | Maximum | Units |
|-----------|---|--|---------|---------|---------|-------|
| $t_{JIT}$ | Buffer Additive Phase Jitter, RMS; refer to Additive Phase Jitter Section | $f_{REF} = 122.88\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 1kHz - 40MHz    |         | 103     | 119     | fs    |
|           |   | $f_{REF} = 122.88\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 10kHz - 20MHz   |         | 64      | 85      | fs    |
|           |   | $f_{REF} = 122.88\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 12kHz - 20MHz   |         | 64      | 84      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 1kHz - 40MHz    |         | 66      | 79      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 10kHz - 20MHz   |         | 48      | 57      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 1V$ , Integration Range: 12kHz - 20MHz   |         | 48      | 57      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 1kHz - 40MHz  |         | 58      | 79      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 10kHz - 20MHz |         | 45      | 60      | fs    |
|           |   | $f_{REF} = 156.25\text{MHz}$ Square Wave, $V_{PP} = 0.5V$ , Integration Range: 12kHz - 20MHz |         | 45      | 60      | fs    |

NOTE: Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfm. The device will meet specifications after thermal equilibrium has been reached under these conditions. Additive Phase Jitter

## Additive Phase Jitter

The spectral purity in a band at a specific offset from the fundamental compared to the power of the fundamental is called the **dBc Phase Noise**. This value is normally expressed using a Phase noise plot and is most often the specified plot in many applications. Phase noise is defined as the ratio of the noise power present in a 1Hz band at a specified offset from the fundamental frequency to the power value of the fundamental. This ratio is expressed in decibels (dBm) or a ratio


of the power in the 1Hz band to the power in the fundamental. When the required offset is specified, the phase noise is called a **dBc** value, which simply means dBm at a specified offset from the fundamental. By investigating jitter in the frequency domain, we get a better understanding of its effects on the desired application over the entire time record of the signal. It is mathematically possible to calculate an expected bit error rate given a phase noise plot.

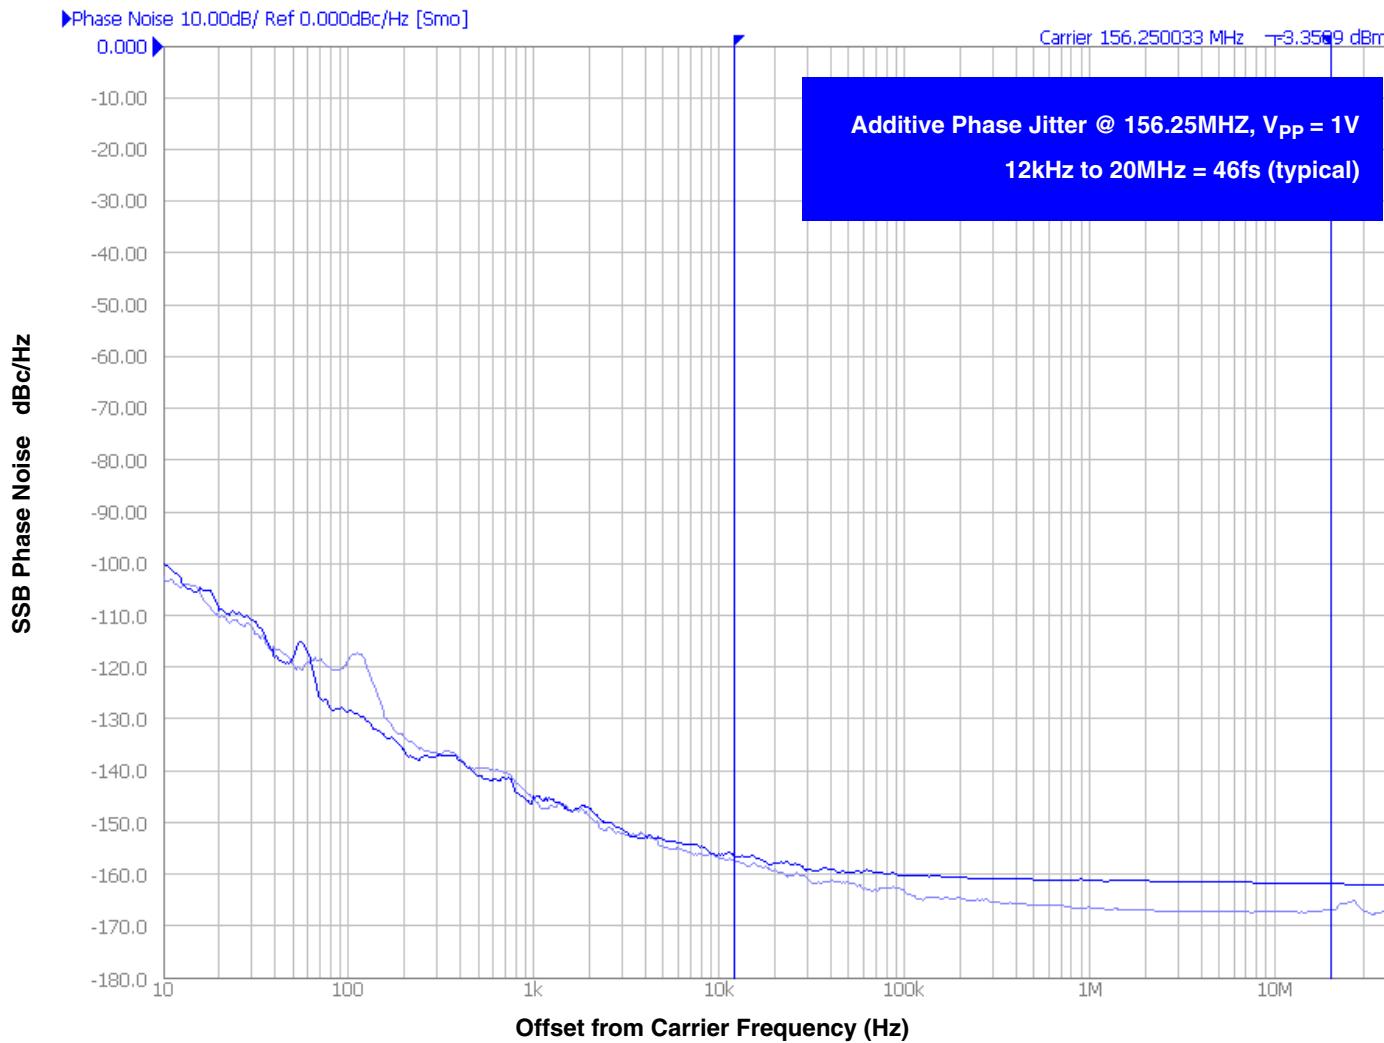


As with most timing specifications, phase noise measurements have issues relating to the limitations of the equipment. Often the noise floor of the equipment is higher than the noise floor of the device. This is illustrated above. The device meets the noise floor of what is shown, but can actually be lower. The phase noise is dependent on the input source and measurement equipment.

Measured using a Wenzel 156.25MHz Oscillator as the input source.


## Parameter Measurement Information

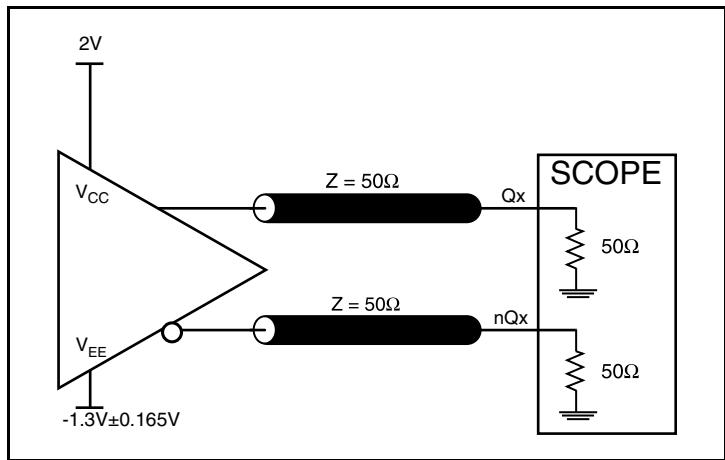


3.3V LVPECL Output Load Test Circuit

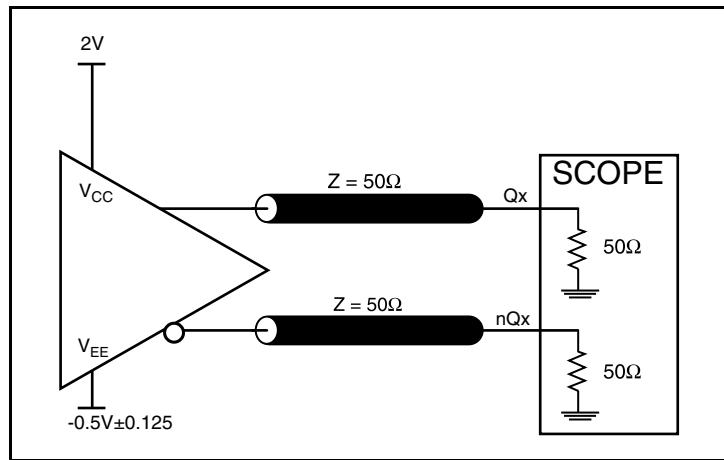


2.5V LVPECL Output Load Test Circuit

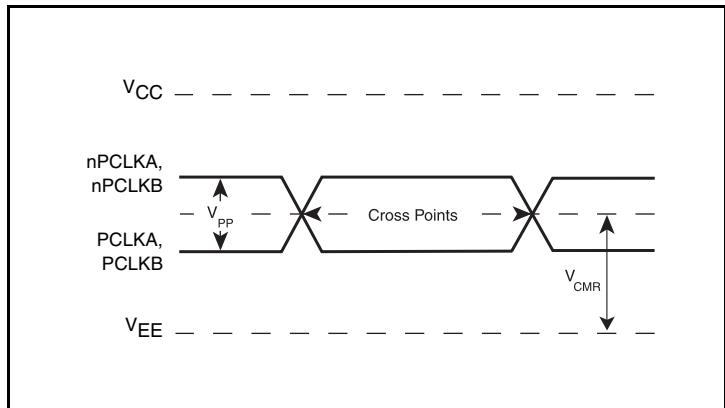


Differential Input Level

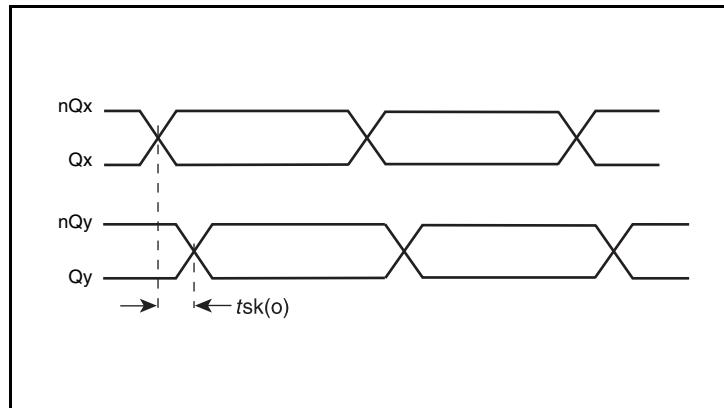

Output Skew

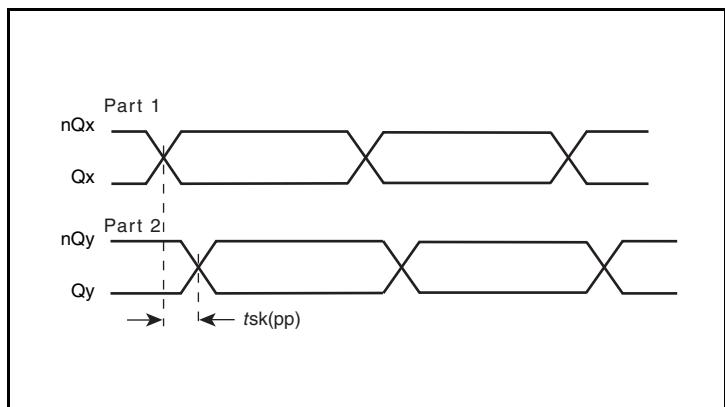


Part-to-Part Skew

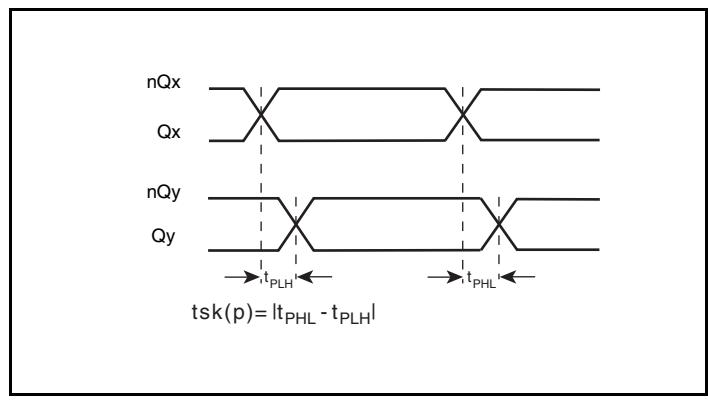


Pulse Skew


## Parameter Measurement Information, continued

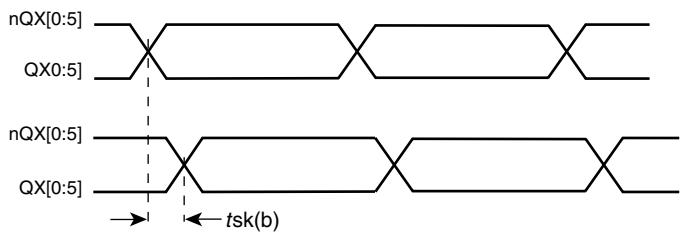


Bank Skew

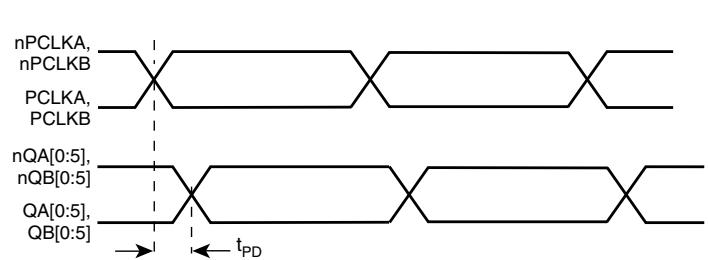

Propagation Delay

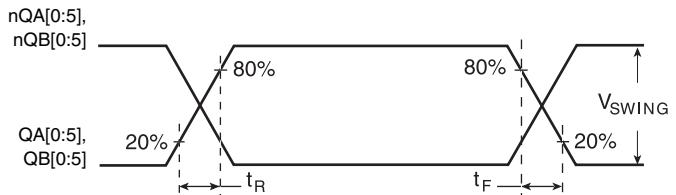

Output Rise/Fall Time

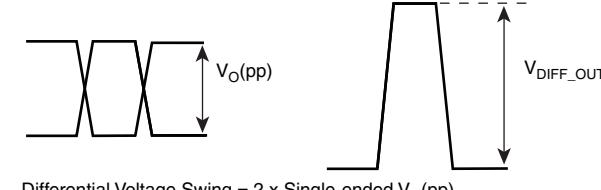

Differential Output Voltage Swing

## Applications Information

### Wiring the Differential Input to Accept Single-Ended Levels


The IDT8SLVP2106I inputs can be interfaced to LVPECL, LVDS, CML or LVCMS drivers. Figure 1A illustrates how to dc couple a single LVCMS input to the IDT8SLVP2106I. The value of the series resistance  $Rs$  is calculated as the difference between the transmission line impedance and the driver output impedance. This resistor should be placed close to the LVCMS driver. To avoid cross-coupling of single-ended LVCMS signals, apply the LVCMS signals to no more than one PCLK input.

A practical method to implement  $V_{th}$  is shown in Figure 1B below. The reference voltage  $V_{th} = V1 = V_{CC}/2$ , is generated by the bias resistors  $R1$  and  $R2$ . The bypass capacitor ( $C1$ ) is used to help filter noise on the DC bias. This bias circuit should be located as close to the input pin as possible.

The ratio of  $R1$  and  $R2$  might need to be adjusted to position the  $V1$  in the center of the input voltage swing. For example, if the input clock swing is 2.5V and  $V_{CC} = 3.3V$ ,  $R1$  and  $R2$  value should be adjusted to set  $V1$  at 1.25V. The values below apply when both the single-ended swing and  $V_{CC}$  are at the same voltage.

When using single-ended signaling, the noise rejection benefits of differential signaling are reduced. Even though the differential input can handle full rail LVCMS signaling, it is recommended that the amplitude be reduced, particularly if both input references are LVCMS to minimize cross talk. The datasheet specifies a lower differential amplitude, however this only applies to differential signals. For single-ended applications, the swing can be larger, however  $V_{IL}$  cannot be less than -0.3V and  $V_{IH}$  cannot be more than  $V_{CC} + 0.3V$ .


Figure 1B shows a way to attenuate the PCLK input level by a factor of two as well as matching the transmission line between the LVCMS driver and the IDT8SLVP2106I at both the source and the

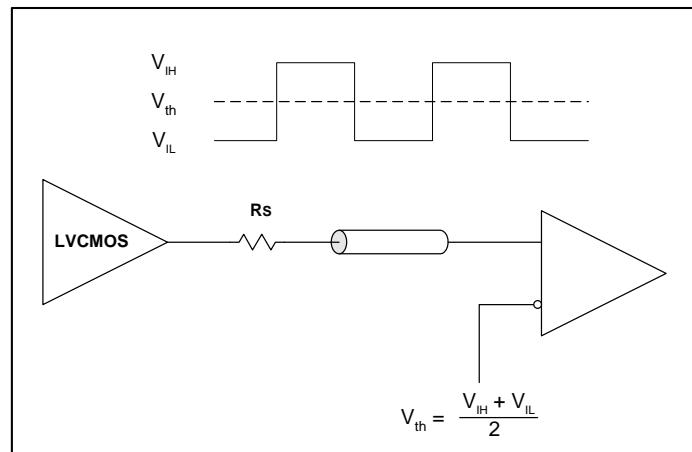

**Figure 1A. DC-Coupling a Single LVCMS Input to the IDT8SLVP2106I**

load. This configuration requires that the sum of the output impedance of the driver ( $Ro$ ) and the series resistance ( $Rs$ ) equals the transmission line impedance.  $R3$  and  $R4$  in parallel should equal the transmission line impedance; for most  $50\Omega$  applications,  $R3$  and  $R4$  will be  $100\Omega$ . The values of the resistors can be increased to reduce the loading for slower and weaker LVCMS driver.

Though some of the recommended components of Figure 1B might not be used, the pads should be placed in the layout so that they can be utilized for debugging purposes. The datasheet specifications are characterized and guaranteed by using a differential signal.

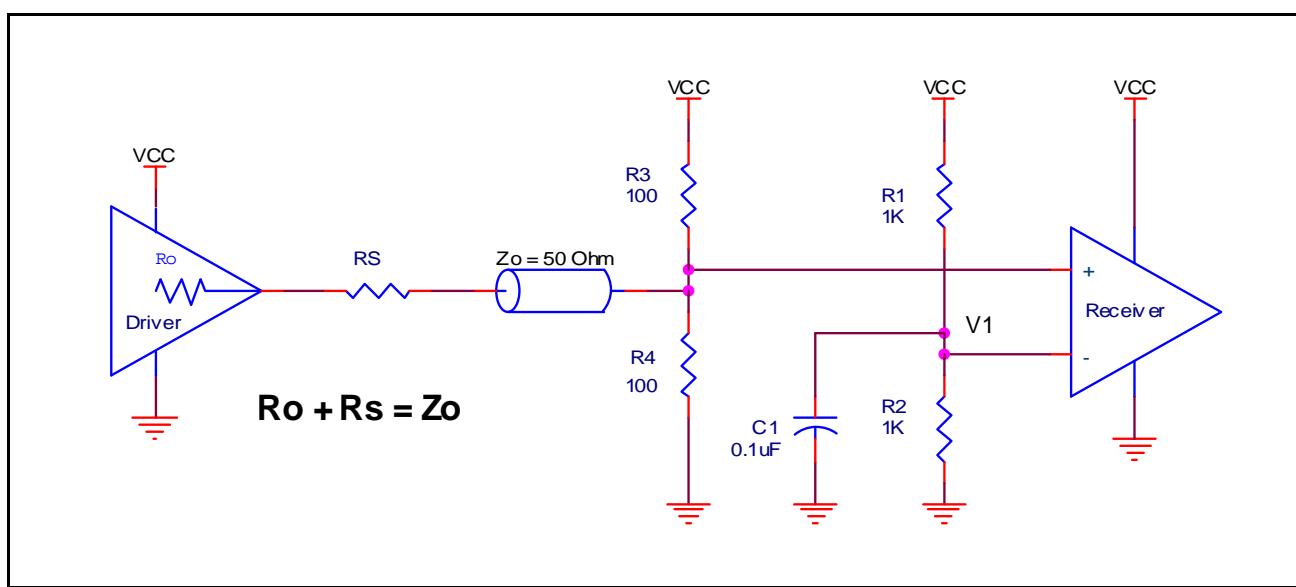


**Figure 1B. Alternative DC Coupling a Single LVCMS Input to the IDT8SLVP2106I**


### 3.3V LVPECL Clock Input Interface

The PCLK /nPCLK accepts LVPECL, LVDS and other differential signals. Both differential signals must meet the  $V_{PP}$  and  $V_{CMR}$  input requirements. Figures 2A to 2C show interface examples for the PCLK/ nPCLK input driven by the most common driver types. The


input interfaces suggested here are examples only. If the driver is from another vendor, use their termination recommendation. Please consult with the vendor of the driver component to confirm the driver termination requirements.

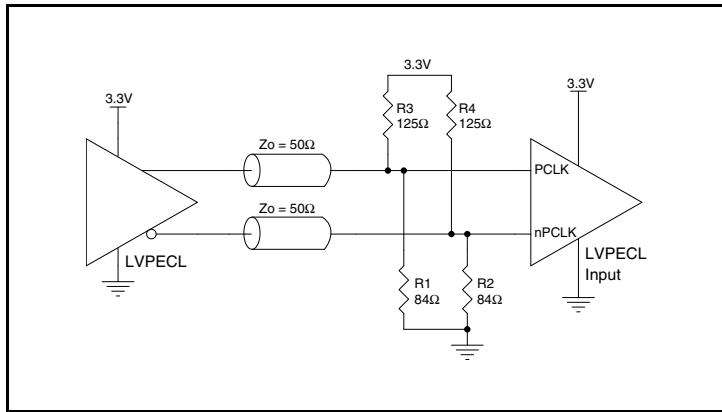

**Figure 2A.** PCLK/nPCLK Input Driven by a 3.3V LVPECL Driver

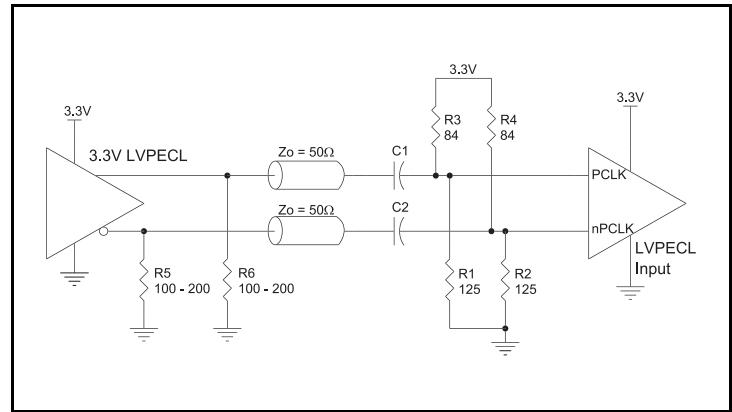

**Figure 2B.** PCLK/nPCLK Input Driven by a 3.3V LVPECL Driver with AC Couple

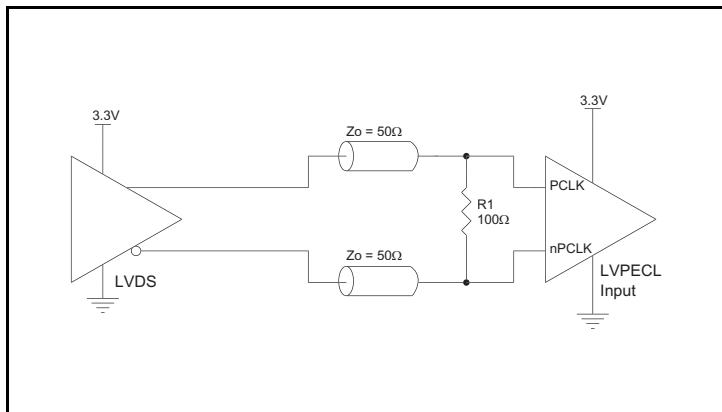

**Figure 2C.** PCLK/nPCLK Input Driven by a 3.3V LVDS Driver

## 2.5V LVPECL Clock Input Interface

The PCLK /nPCLK accepts LVPECL, LVDS and other differential signals. Both differential signals must meet the  $V_{PP}$  and  $V_{CMR}$  input requirements. Figures 3A to 3C show interface examples for the PCLK/ nPCLK input driven by the most common driver types. The

input interfaces suggested here are examples only. If the driver is from another vendor, use their termination recommendation. Please consult with the vendor of the driver component to confirm the driver termination requirements.

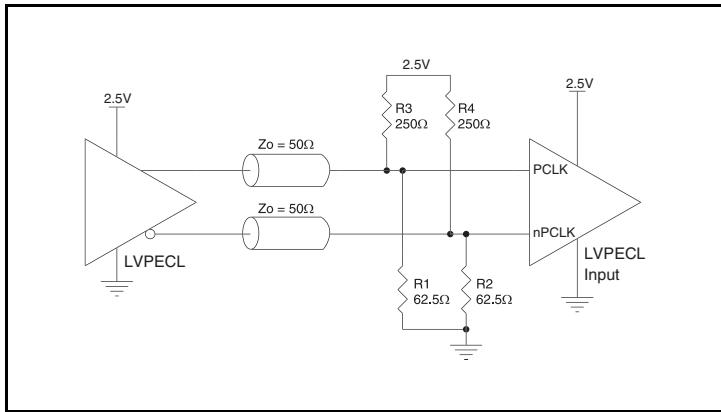


Figure 3A. PCLK/nPCLK Input Driven by a 2.5V LVPECL Driver

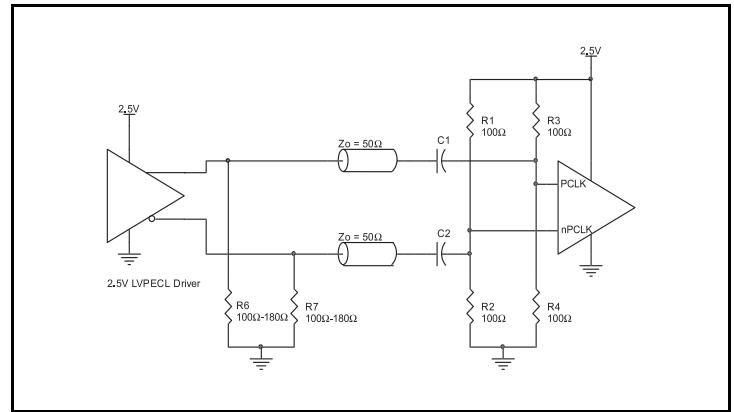


Figure 3B. PCLK/nPCLK Input Driven by a 2.5V LVPECL Driver with AC Couple

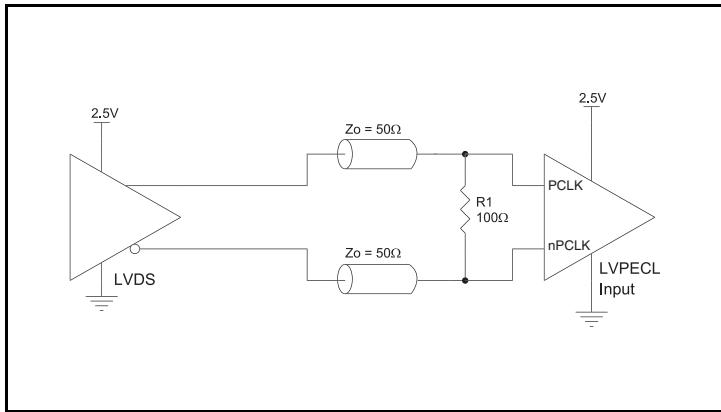


Figure 3C. PCLK/nPCLK Input Driven by a 2.5V LVDS Driver

## Recommendations for Unused Input and Output Pins

### Inputs:

#### PCLKx/nPCLKx Inputs

For applications requiring only one differential input, the unused PCLKx/nPCLKx input can be left floating. Though not required, but for additional protection, a  $1\text{k}\Omega$  resistor can be tied from the unused PCLKx input to ground.

### Outputs:

#### LVPECL Outputs

All unused LVPECL outputs can be left floating. We recommend that there is no trace attached. Both sides of the differential output pair should either be left floating or terminated.

#### $V_{REFX}$

Unused  $V_{REFA}$  and  $V_{REFB}$  pins can be left floating. We recommend that there is no trace attached.

## VFQFN EPAD Thermal Release Path

In order to maximize both the removal of heat from the package and the electrical performance, a land pattern must be incorporated on the Printed Circuit Board (PCB) within the footprint of the package corresponding to the exposed metal pad or exposed heat slug on the package, as shown in *Figure 4*. The solderable area on the PCB, as defined by the solder mask, should be at least the same size/shape as the exposed pad/slug area on the package to maximize the thermal/electrical performance. Sufficient clearance should be designed on the PCB between the outer edges of the land pattern and the inner edges of pad pattern for the leads to avoid any shorts.

While the land pattern on the PCB provides a means of heat transfer and electrical grounding from the package to the board through a solder joint, thermal vias are necessary to effectively conduct from the surface of the PCB to the ground plane(s). The land pattern must be connected to ground through these vias. The vias act as "heat pipes". The number of vias (i.e. "heat pipes") are application specific

and dependent upon the package power dissipation as well as electrical conductivity requirements. Thus, thermal and electrical analysis and/or testing are recommended to determine the minimum number needed. Maximum thermal and electrical performance is achieved when an array of vias is incorporated in the land pattern. It is recommended to use as many vias connected to ground as possible. It is also recommended that the via diameter should be 12 to 13mils (0.30 to 0.33mm) with 1oz copper via barrel plating. This is desirable to avoid any solder wicking inside the via during the soldering process which may result in voids in solder between the exposed pad/slug and the thermal land. Precautions should be taken to eliminate any solder voids between the exposed heat slug and the land pattern. Note: These recommendations are to be used as a guideline only. For further information, please refer to the Application Note on the Surface Mount Assembly of Amkor's Thermally/Electrically Enhance Leadframe Base Package, Amkor Technology.


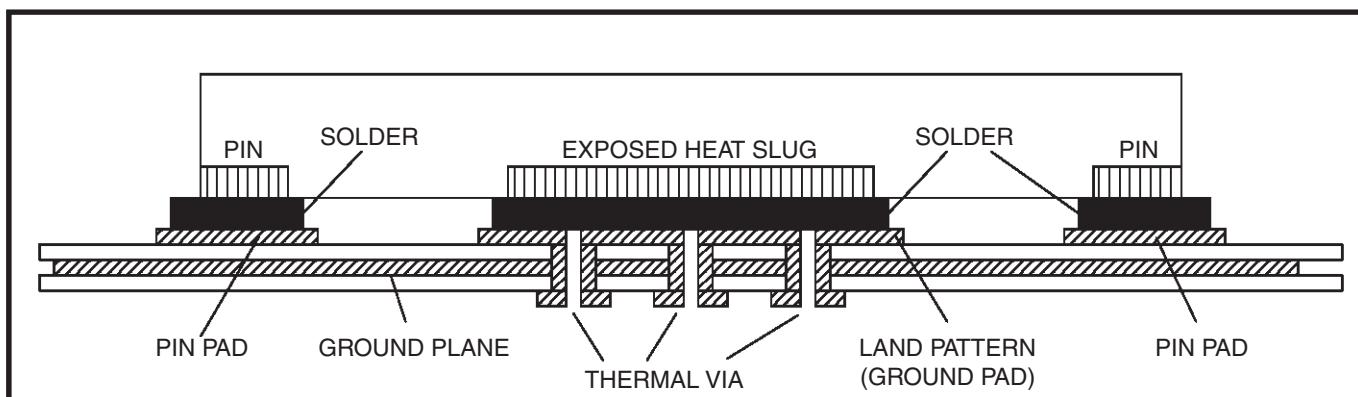


Figure 4. P.C. Assembly for Exposed Pad Thermal Release Path – Side View (drawing not to scale)

## Termination for 3.3V LVPECL Outputs

The clock layout topology shown below is a typical termination for LVPECL outputs. The two different layouts mentioned are recommended only as guidelines.


The differential outputs are a low impedance follower output that generate ECL/LVPECL compatible outputs. Therefore, terminating resistors (DC current path to ground) or current sources must be used for functionality. These outputs are designed to drive 50Ω

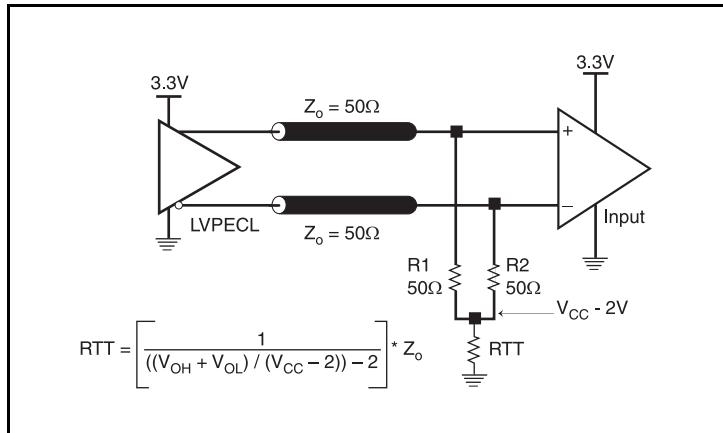

### Figure 5A. 3.3V LVPECL Output Termination

transmission lines. Matched impedance techniques should be used to maximize operating frequency and minimize signal distortion.

Figures 5A and 5B show two different layouts which are recommended only as guidelines. Other suitable clock layouts may exist and it would be recommended that the board designers simulate to guarantee compatibility across all printed circuit and clock component process variations.

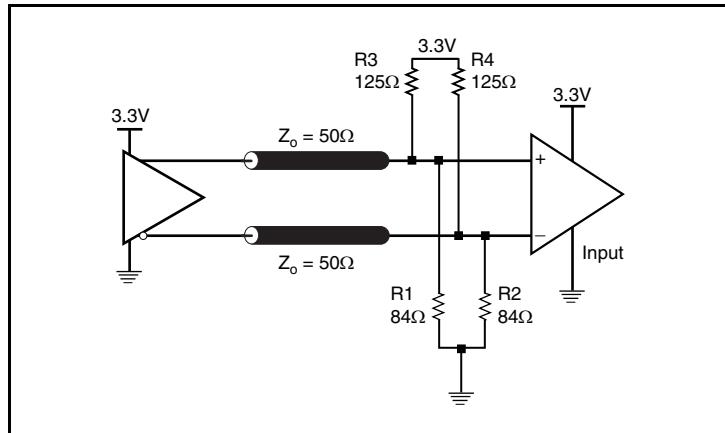

### Figure 5B. 3.3V LVPECL Output Termination

## Termination for 2.5V LVPECL Outputs

Figure 6A and Figure 6B show examples of termination for 2.5V LVPECL driver. These terminations are equivalent to terminating 50Ω to  $V_{CC} - 2V$ . For  $V_{CC} = 2.5V$ , the  $V_{CC} - 2V$  is very close to ground

level. The R3 in Figure 6B can be eliminated and the termination is shown in Figure 6C.

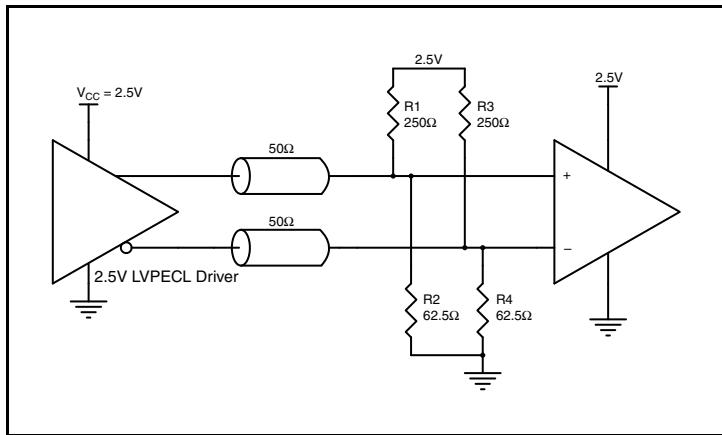


Figure 6A. 2.5V LVPECL Driver Termination Example

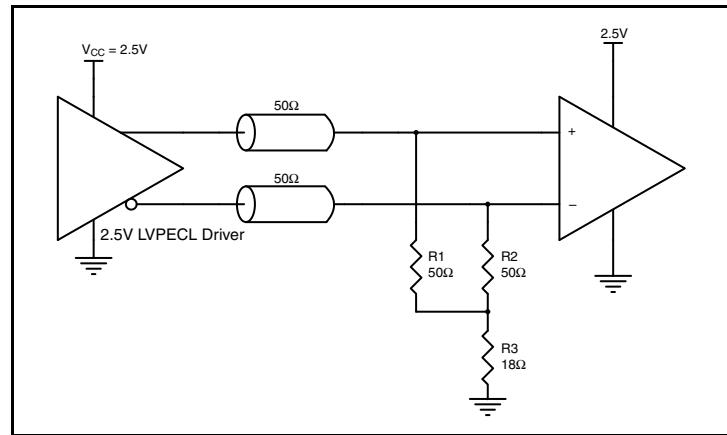


Figure 6B. 2.5V LVPECL Driver Termination Example

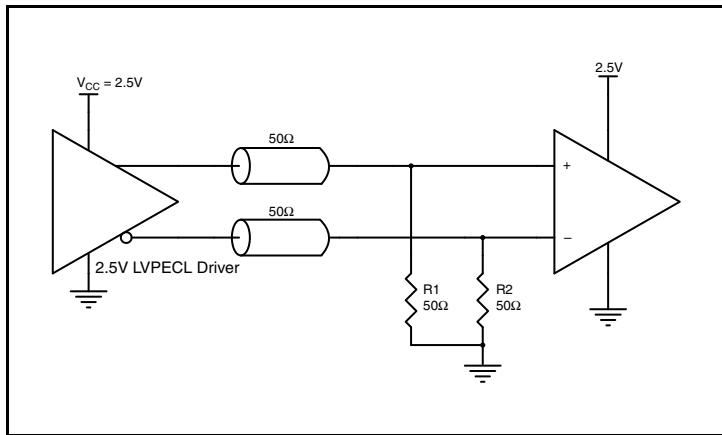


Figure 6C. 2.5V LVPECL Driver Termination Example

## Power Considerations

This section provides information on power dissipation and junction temperature for the 8SLVP2106. Equations and example calculations are also provided.

### 1. Power Dissipation.

The total power dissipation for the 8SLVP2106 is the sum of the core power plus the power dissipated at the output(s). The following is the power dissipation for  $V_{CC} = 3.465V$ , which gives worst case results.

NOTE: Please refer to Section 3 for details on calculating power dissipated in the load.

$$\text{Power (core)}_{MAX} = V_{CC\_MAX} * I_{EE\_MAX} = 3.465V * 114mA = 395\text{mW}$$

- Power (outputs)<sub>MAX</sub> = **37.1mW/Loaded Output pair**  
If all outputs are loaded, the total power is  $12 * 37.1\text{mW} = 445.2\text{mW}$

$$\text{Total Power}_{MAX} (3.465V, \text{with all outputs switching}) = 395\text{mW} + 445.2\text{mW} = 840\text{mW}$$

### 2. Junction Temperature.

Junction temperature,  $T_j$ , is the temperature at the junction of the bond wire and bond pad directly affects the reliability of the device. The maximum recommended junction temperature is  $125^\circ\text{C}$ . Limiting the internal transistor junction temperature,  $T_j$ , to  $125^\circ\text{C}$  ensures that the bond wire and bond pad temperature remains below  $125^\circ\text{C}$ .

The equation for  $T_j$  is as follows:  $T_j = \theta_{JA} * P_{d\_total} + T_A$

$T_j$  = Junction Temperature

$\theta_{JA}$  = Junction-to-Ambient Thermal Resistance

$P_{d\_total}$  = Total Device Power Dissipation (example calculation is in section 1 above)

$T_A$  = Ambient Temperature

In order to calculate junction temperature, the appropriate junction-to-ambient thermal resistance  $\theta_{JA}$  must be used. Assuming no air flow and a multi-layer board, the appropriate value is  $38.1^\circ\text{C/W}$  per Table 5 below.

Therefore,  $T_j$  for an ambient temperature of  $85^\circ\text{C}$  with all outputs switching is:

$$85^\circ\text{C} + 0.840\text{W} * 38.1^\circ\text{C/W} = 117^\circ\text{C}. \text{ This is below the limit of } 125^\circ\text{C}.$$

This calculation is only an example.  $T_j$  will obviously vary depending on the number of loaded outputs, supply voltage, air flow and the type of board (multi-layer).


**Table 5. Thermal Resistance  $\theta_{JA}$  for 40-Lead VFQFN, Forced Convection**

| $\theta_{JA}$ by Velocity                   |                        |                      |                        |
|---|------------------------|----------------------|------------------------|
| Meters per Second                           | 0                      | 1                    | 2                      |
| Multi-Layer PCB, JEDEC Standard Test Boards | $38.1^\circ\text{C/W}$ | $32^\circ\text{C/W}$ | $29.9^\circ\text{C/W}$ |

### 3. Calculations and Equations.

The purpose of this section is to calculate the power dissipation for the LVPECL output pair.

LVPECL output driver circuit and termination are shown in *Figure 7*.

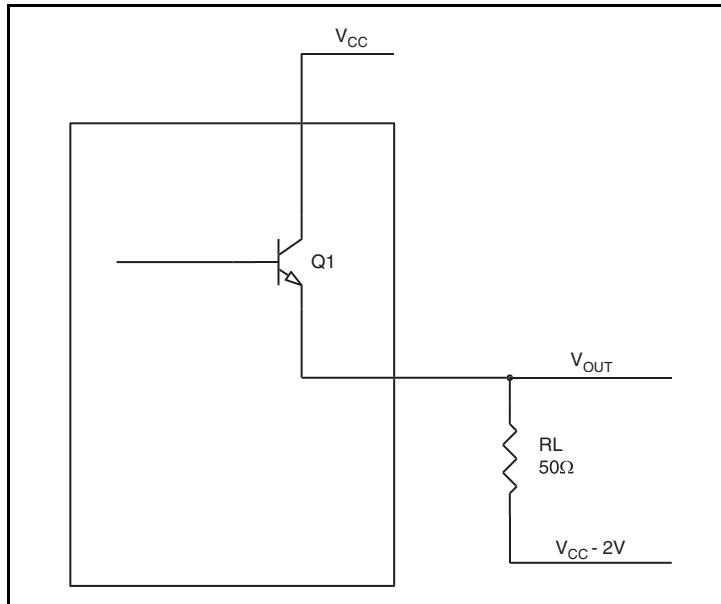

**Figure 7. LVPECL Driver Circuit and Termination**

To calculate worst case power dissipation at the output(s), use the following equations which assume a  $50\Omega$  load, and a termination voltage of  $V_{CC} - 2V$ . These are typical calculations.

- For logic high,  $V_{OUT} = V_{OH\_MAX} = V_{CC\_MAX} - 0.72V$   
 $(V_{CC\_MAX} - V_{OH\_MAX}) = 0.72V$
- For logic low,  $V_{OUT} = V_{OL\_MAX} = V_{CC\_MAX} - 1.26V$   
 $(V_{CC\_MAX} - V_{OL\_MAX}) = 1.26$

$P_{d\_H}$  is the power dissipation when the output drives high.

$P_{d\_L}$  is the power dissipation when the output drives low.

$$P_{d\_H} = [(V_{OH\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OH\_MAX}) = [(2V - (V_{CC\_MAX} - V_{OH\_MAX}))/R_L] * (V_{CC\_MAX} - V_{OH\_MAX}) = [(2V - 0.72V)/50\Omega] * 0.72V = 18.43mW$$

$$P_{d\_L} = [(V_{OL\_MAX} - (V_{CC\_MAX} - 2V))/R_L] * (V_{CC\_MAX} - V_{OL\_MAX}) = [(2V - (V_{CC\_MAX} - V_{OL\_MAX}))/R_L] * (V_{CC\_MAX} - V_{OL\_MAX}) = [(2V - 1.26V)/50\Omega] * 1.26V = 18.65mW$$

Total Power Dissipation per output pair =  $P_{d\_H} + P_{d\_L} = 37.1mW$

## Case Temperature Considerations

This device supports applications in a natural convection environment which does not have any thermal conductivity through ambient air. The printed circuit board (PCB) is typically in a sealed enclosure without any natural or forced air flow and is kept at or below a specific temperature. The device package design incorporates an exposed pad (ePad) with enhanced thermal parameters which is soldered to the PCB where most of the heat escapes from the bottom exposed pad. For this type of application, it is recommended to use the junction-to-board thermal characterization parameter  $\Psi_{JB}$  (Psi-JB) to calculate the junction temperature ( $T_J$ ) and ensure it does not exceed the maximum allowed junction temperature in the Absolute Maximum Rating table.

The junction-to-board thermal characterization parameter,  $\Psi_{JB}$ , is calculated using the following equation:


$$T_J = T_{CB} + \Psi_{JB} \times P_d, \text{ Where}$$

$T_J$  = Junction temperature at steady state condition in ( $^{\circ}\text{C}$ ).

$T_{CB}$  = Case temperature (Bottom) at steady state condition in ( $^{\circ}\text{C}$ ).

$\Psi_{JB}$  = Thermal characterization parameter to report the difference between junction temperature and the temperature of the board measured at the top surface of the board.

$P_d$  = power dissipation (W) in desired operating configuration.

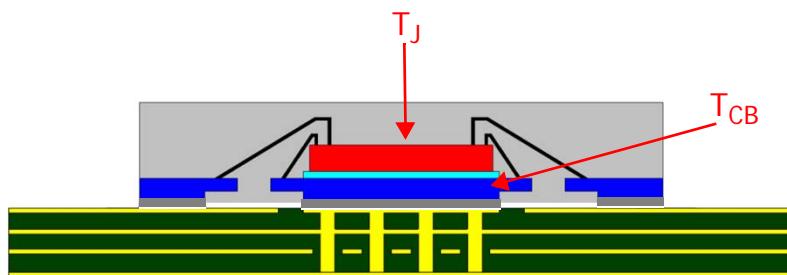

The ePad provides a low thermal resistance path for heat transfer to the PCB and represents the key pathway to transfer heat away from the IC to the PCB. It's critical that the connection of the exposed pad to the PCB is properly constructed to maintain the desired IC case temperature ( $T_{CB}$ ). A good connection ensures that temperature at the exposed pad ( $T_{CB}$ ) and the board temperature ( $T_B$ ) are relatively the same. An improper connection can lead to increased junction temperature, increased power consumption and decreased electrical performance. In addition, there could be long-term reliability issues and increased failure rate.

Example Calculation for Junction Temperature ( $T_J$ ):  $T_J = T_{CB} + \Psi_{JB} \times P_d$

|               |                        |
|---------------|------------------------|
| Package type: | 40-Lead VFQFN          |
| Body size:    | 6mm x 6mm x 0.925mm    |
| ePad size:    | 2.9mm x 2.9mm          |
| Thermal Via:  | 4 x 4 matrix           |
| $\Psi_{JB}$   | 1.5 C/W                |
| $T_{CB}$      | 105 $^{\circ}\text{C}$ |
| $P_d$         | 0.840 W                |

For the variables above, the junction temperature is equal to 106.3 $^{\circ}\text{C}$ . Since this is below the maximum junction temperature of 125 $^{\circ}\text{C}$ , there are no long term reliability concerns. In addition, since the junction temperature at which the device was characterized using forced convection is 117 $^{\circ}\text{C}$ , this device can function without the degradation of the specified AC or DC parameters.

## Reliability Information


**Table 6.  $\theta_{JA}$  vs. Air Flow Table for a 40 Lead VFQFN**

| $\theta_{JA}$ at 0 Air Flow                 |          |        |          |
|---|----------|--------|----------|
| Meters per Second                           | 0        | 1      | 2        |
| Multi-Layer PCB, JEDEC Standard Test Boards | 38.1°C/W | 32°C/W | 29.9°C/W |

## Transistor Count

The transistor count for the 8SLVP2106 is: 7706

## 40-Lead VFQFN Package Outline and Package Dimensions

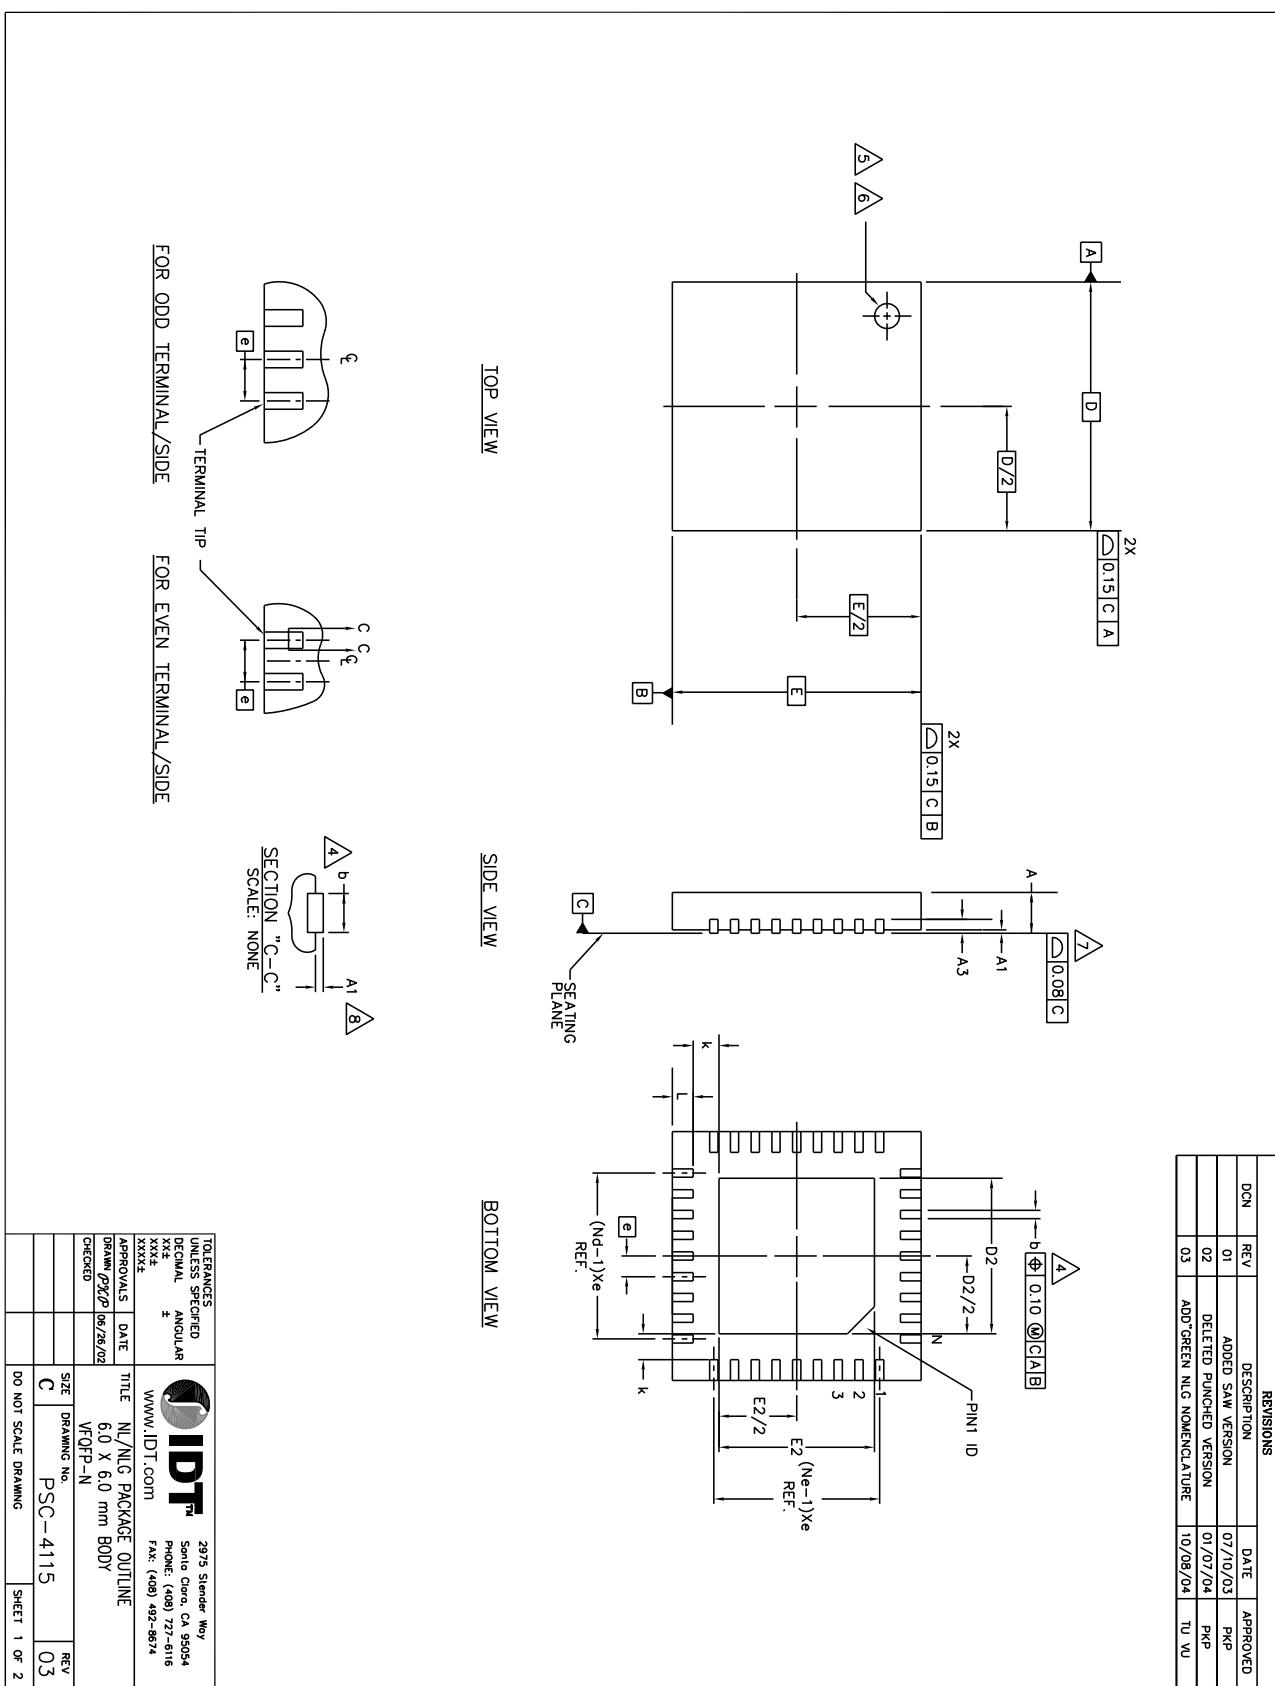

# LOW PHASE NOISE, DUAL 1-TO-6, 3.3V, 2.5V LVPECL OUTPUT FANOUT BUFFER

© 2019 Renesas Electronics Corporation

## 40-Lead VFQFN Package Outline and Package Dimensions, continued

| REVISIONS |     |                            |                |
|-----------|-----|----------------------------|----------------|
| DOC       | REV | DESCRIPTION                | DATE APPROVED  |
|           | 01  | ADDED SAW VERSION          | 07/10/03 PKP   |
|           | 02  | DELETED PUNCHED VERSION    | 01/07/04       |
|           | 03  | ADD GREEN NLG NOMENCLATURE | 10/08/04 TU WU |

| JEDEC VARIATION VJJC-3 |          |      | JEDEC VARIATION VJJD-5 |                |      |
|------------------------|----------|------|------------------------|----------------|------|
| MIN.                   | NOM.     | MAX. | MIN.                   | NOM.           | MAX. |
| 0.65                   | 0.65 BSC | 2.3  | 0.50                   | 0.50 BSC       | 4.0  |
| N                      |          | 7    | 2                      | N              | 10   |
| N <sub>d</sub>         |          | 7    | 2                      | N <sub>e</sub> | 10   |
| N <sub>e</sub>         |          | 7    | 2                      | N <sub>e</sub> | 10   |
| b                      | 0.25     | 0.30 | 0.18                   | 0.25           | 0.30 |
| D <sub>2</sub>         | —        | 4    | 4                      | 10             | 10   |
| E <sub>2</sub>         | —        | 10   | D <sub>2</sub>         | —              | 10   |
|                        |          |      | E <sub>2</sub>         | —              | 10   |

| COMMON DIMENSIONS |      |      |
|-------------------|------|------|
| MIN.              | NOM. | MAX. |
| A                 | —    | 0.90 |
| A <sub>1</sub>    | 0.00 | 0.02 |
| A <sub>3</sub>    | 0.20 | REF. |
| D                 | 6.00 | BSC  |
| E                 | 6.00 | BSC  |
| k                 | 0.20 | —    |
| L                 | 0.35 | 0.40 |
|                   | —    | 0.45 |

NOTES: 1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M. – 1994.

2. N IS THE NUMBER OF TERMINALS.  
N<sub>d</sub> IS THE NUMBER OF TERMINALS IN X-DIRECTION &  
N<sub>e</sub> IS THE NUMBER OF TERMINALS IN Y-DIRECTION.

3. ALL DIMENSIONS ARE IN MILLIMETERS.

4. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED

BETWEEN 0.20 AND 0.30mm FROM TERMINAL TIP.

5. THE PIN # IDENTIFIER MUST EXIST ON THE TOP SURFACE OF THE PACKAGE

BY USING INDENTATION MARK OR OTHER FEATURE OF PACKAGE BODY.

6. EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.

7. APPLIED TO EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDED

PART OF EXPOSED PAD FROM MEASURING.

8. APPLIED ONLY FOR TERMINALS.

9. THIS OUTLINES CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-220,  
VARIATION VJJC-3 & VJJD-5 WITH THE EXCEPTION OF D<sub>2</sub> & E<sub>2</sub>.

10. DIMENSIONS D<sub>2</sub> & E<sub>2</sub> VARY DEPENDING ON DEVICE, SUPPLIER, ETC.

**40-Lead VFQFN, D<sub>2</sub>/E<sub>2</sub> EPAD Dimensions: 2.9mm x 2.9mm**

| TOLENCES UNLESS SPECIFIED | 2975 Slender Way             |
|---------------------------|------------------------------|
| DECIMAL                   | Santa Clara, CA 95054        |
| ANGULAR                   | PHONE: (408) 227-6116        |
| XX±                       | WWW.IDT.COM                  |
| XXXX±                     | FAX: (408) 492-8674          |
| APPROVALS                 | TITLE NL/NLG PACKAGE OUTLINE |
| APPROVALS                 | DRAWN BY/P/C 06/26/02        |
| APPROVALS                 | 6.0 X 6.0 mm BODY            |
| APPROVALS                 | VFQFP-N                      |
| CHECKED                   | SIZE                         |
| CHECKED                   | DRAWING NO. PSC-4115         |
| CHECKED                   | REV 03                       |
|                           | DO NOT SCALE DRAWING         |
|                           | SHEET 2 OF 2                 |

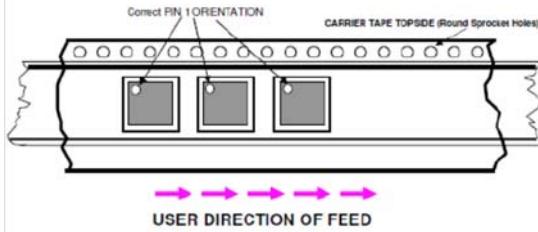
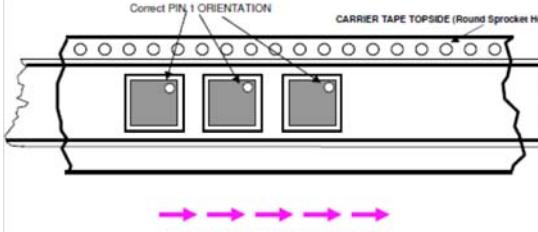
## Ordering Information

Table 7. Ordering Information

| Part/Order Number | Marking           | Package                   | Shipping Packaging                        | Temperature   |
|-------------------|-------------------|---------------------------|---|---------------|
| 8SLVP2106ANLGI    | IDT8SLVP2106ANLGI | "Lead-Free" 40-Lead VFQFN | Tray                                      | -40°C to 85°C |
| 8SLVP2106ANLGI8   | IDT8SLVP2106ANLGI | "Lead-Free" 40-Lead VFQFN | Tape & Reel, Pin 1 Orientation: EIA-481-C | -40°C to 85°C |
| 8SLVP2106ANLGI/W  | IDT8SLVP2106ANLGI | "Lead-Free" 40-Lead VFQFN | Tape & Reel, Pin 1 Orientation: EIA-481-D | -40°C to 85°C |

NOTE: Parts that are ordered with an "G" suffix to the part number are the Pb-Free configuration and are RoHS compliant.

Table 8. Pin 1 Orientation in Tape and Reel Packaging

| Part Number Suffix | Pin 1 Orientation      | Illustration  |
|--------------------|------------------------|---|
| 8                  | Quadrant 1 (EIA-481-C) |   |
| /W                 | Quadrant 2 (EIA-481-D) |  |

## Revision History Sheet

| Rev | Table  | Page         | Description of Change  | Date       |
|-----|--------|--------------|--|------------|
| A   | T7, T8 | 21           | Ordering Information Table - added additional row.<br>Added Orientation Packaging Table.   | 8/02/2012  |
| A   | T4A    | 1<br>5<br>10 | Features section - added Differential PCLK bullets.<br>AC Characteristics Notes, added NOTE 7.<br>Updated application note, <i>Wiring the Differential Inputs to Accept Single-ended Levels.</i> | 10/29/2012 |
| A   | T4A    | 5            | Changed Note 8 to read "V <sub>IL</sub> should not be less than -0.3V. V <sub>IH</sub> should not be higher than V <sub>CC</sub> ."  | 1/28/2014  |
| B   |        | 1<br>18      | Features Section - added Case Temperature bullet.<br>Added Case Temperature section.<br>Updated data sheet format.   | 6/9/15     |



## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit [www.renesas.com/contact-us/](http://www.renesas.com/contact-us/).