

#### RC38208/RC38108

FemtoClock®3 Ultra-low Phase Noise Jitter Attenuator and Clock Generator

#### **Description**

The RC38208/RC38108 is an ultra-low phase noise jitter attenuator, multi-frequency clock synthesizer, and digitally controlled oscillator (DCO). This flexible, low-power device outputs clocks with ultra-low inband phase noise and spurious for 4G and 5G RF transceivers and with jitter below 25fs-rms for 112Gbps and 224Gbps SerDes.

#### **Applications**

- Timing for optical front-end DAC/ADC and DSP
- Reference clock for 112Gbps and 224Gbps SerDes
- 5G distribution units (DU), switches, and routers
- High-performance DCO for Precision Time Protocol (PTP) based clocks

#### **Features**

- Ultra-low phase noise synthesizer with jitter below 25fs RMS, 12kHz to 20MHz with 4MHz HPF
- Two independent low phase noise sync domains
- Four independent low phase noise frequency domains

- Support for JESD204B/C
- Time sync block with time to digital converter (TDC), time of day (TOD) counter, and PTP clocks
- 8 clock outputs with independent integer dividers
  - · 6: LVDS, HCSL (AC-LVPECL) or CML
  - · 2: LVDS, HCSL (AC-LVPECL) or LVCMOS
- Output frequency range:
  - CML: DC to 2.5GHz
  - · LVDS or HCSL: DC to 1GHz
  - · LVCMOS: DC to 250MHz
- Two differential clock inputs configurable as four single-ended clock inputs
- Operates from a 1.8V supply.
- Clock inputs tolerate 1.8V input when the device is powered off, sinking less than 1mA
- CLKIN input frequency range: DC to 1GHz
- Time Sync TDC supports 1PPS and PP2S inputs
- DPLLs comply with ITU-T G.8262 and G.8262.1
- DPLL input-to-output phase variation ≤ 100ps
- DCO frequency resolution < 10<sup>-13</sup>
- Package: 7 × 7 mm, 64-BGA

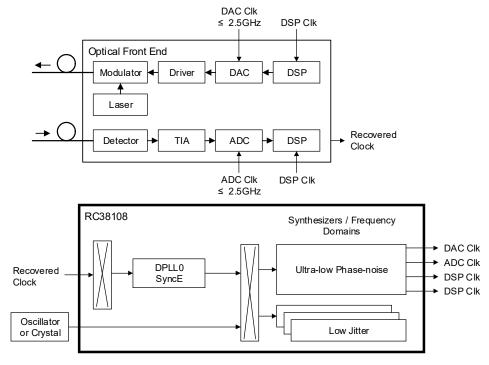


Figure 1. Typical Optical Front-End Use Case

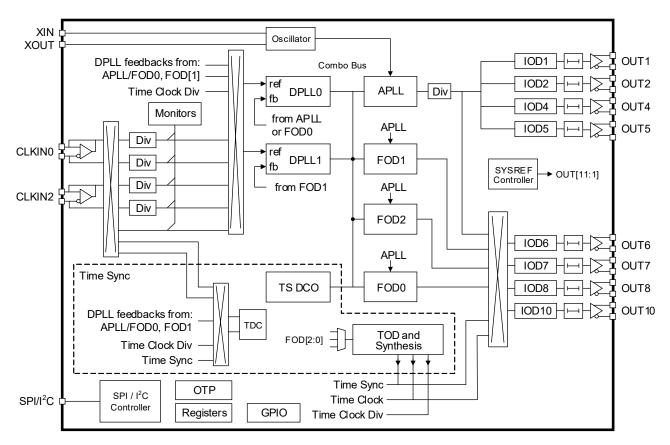


Figure 2. RC38208 Block Diagram

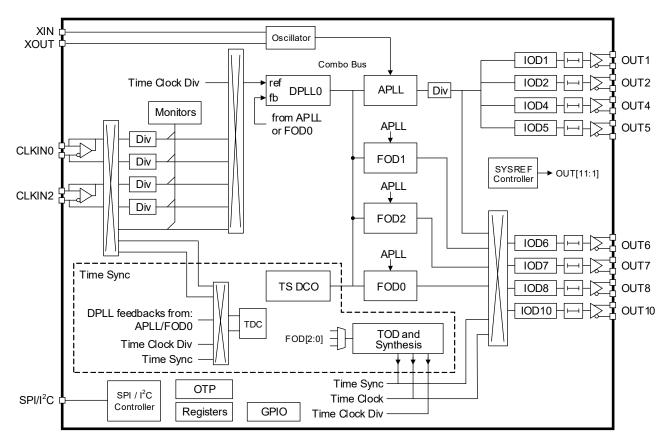


Figure 3. RC38108 Block Diagram

# **Contents**

1.	Pin In	formation	. 7
	1.1	Pin Assignments	. 7
	1.2	Pin Descriptions	. 7
	1.3	Pin Characteristics	10
2.	Speci	ifications	11
	2.1	Absolute Maximum Ratings	11
	2.2	Recommended Operating Conditions	11
	2.3	Thermal Specifications	12
	2.4	APLL Phase Jitter	12
	2.5	FOD Phase Jitter	13
	2.6	TOD and Synthesis Phase Jitter	13
	2.7	APLL Phase Noise	
	2.8	Peak APLL Spurious Power	14
	2.9	Power Supply Noise Rejection	
	2.10	Crystal Oscillator Input and APLL AC/DC Electrical Characteristics	
	2.11	Recommended Crystal Characteristics	
	2.12	Clock Input (CLKIN/nCLKIN) AC/DC Characteristics	
	2.13	Output Frequencies and Start-Up Time	
	2.14	Phase and Frequency Uncertainty	
	2.15	Output-to-Output Skew and Input-to-Output Delay	
	2.16	LVCMOS Output AC/DC Characteristics	
	2.17	LVDS Output AC/DC Characteristics	
	2.18	HCSL Output AC/DC Characteristics	
	2.19	CML Output AC/DC Characteristics	
	2.20	Power Supply Current	
	2.21	GPIO, Serial Port, and nMR DC Electrical Characteristics.	
	2.22	CMOS GPIO, Serial Port, and nMR Common Electrical Characteristics	
	2.23	I <sup>2</sup> C Bus Target Timing Diagram	
	2.24	I <sup>2</sup> C Bus Target Timing	
	2.25	I <sup>2</sup> C Bus AC/DC Electrical Characteristics.	
	2.26	SPI Target Timing Diagrams.	
	2.27	SPI Target Timing	
3.		tional Description	
J.	3.1	Overview	
	3.2	APLL Frequency Reference	
	3.3	Analog PLL	
	3.4	Integer Output Dividers	
	3.5	Fractional Output Dividers	
	3.6	Divider Synchronization	
	3.7	Digital PLLs	
	3.1	3.7.1 DPLL Free-Run State	
		3.7.2 DPLL Acquire State	
		•	
		3.7.3         DPLL Normal State	
	2.0	3.7.5 DPLL Hitless Switch State	
	3.8	DPLL External Feedback	
	3.9	DPLL Reference Switching.	
		3.9.1 Hitless Reference Switching.	
	0.40	3.9.2 Aligned Reference Switching	
	3.10	Clock Output Enable	
	3.11	Reference Monitors	21

#### RC38208/RC38108 Datasheet

	2.40	CVCDE	- -	27					
	3.12		F						
	3.13	•	/nc						
	3.14	Status a	and Control	. 28					
4.	Appli	cations li	nformation	. 29					
	4.1	Power C	Considerations	. 29					
	4.2	Power-C	On Reset and Reset Controller	. 29					
	4.3	Recomn	nendations for Unused Input and Output Pins	. 30					
		4.3.1	CLKIN/nCLKIN Pins	. 30					
		4.3.2	LVCMOS Control Pins	. 30					
		4.3.3	LVCMOS Output Pins	. 30					
		4.3.4	Differential Output Pins	. 30					
	4.4	Overdriv	ving the Crystal Interface	. 30					
	4.5	Different	tial Output Termination	. 31					
		4.5.1	Direct-Coupled HCSL Termination	. 31					
		4.5.2	Direct-Coupled LVDS Termination	. 32					
		4.5.3	Direct-Coupled CML Termination	. 32					
		4.5.4	AC-Coupled Differential Termination	. 33					
		4.5.5	AC-Coupled LVPECL (AC-LVPECL) Termination	. 33					
5.	Packa	age Outli	ne Drawings	. 35					
6.	Marki	ing Diagr	am	. 35					
7.	Orde	ring Infor	mation	. 35					
8.	Revis	ion Histo	ory	. 36					
٨	FCAD Design Information								

#### RC38208/RC38108 Datasheet

# **Figures**

Figure 1. Typical Optical Front-End Use Case	1
Figure 2. RC38208 Block Diagram	2
Figure 3. RC38108 Block Diagram	2
Figure 4. Pin Assignments - Bottom View	7
Figure 5. I <sup>2</sup> C Bus Target Timing Diagram	22
Figure 6. SPI Timing Diagrams	23
Figure 7. Controller Reset Sequence Initiation	29
Figure 8. LVCMOS Driver to Crystal Input Interface	30
Figure 9. LVPECL Driver to Crystal Input Interface	31
Figure 10. Internal Termination Resistors for Differential Drivers	31
Figure 11. HCSL Source Termination Using Internal Termination	32
Figure 12. HCSL End Termination	32
Figure 13. LVDS Termination	32
Figure 14. Direct-Coupled CML Termination	33
Figure 15. AC-Coupled Differential Termination	33
Figure 16. AC-LVPECL Termination for LVPECL Receiver with Internal Termination Resistors and Biasing	34

#### RC38208/RC38108 Datasheet

# **Tables**

Table 1. Pin Descriptions	7
Table 2. Input Characteristics	10
Table 3. Absolute Maximum Ratings	11
Table 4. Recommended Operating Conditions	11
Table 5. Thermal Resistance	12
Table 6. APLL Phase Jitter	12
Table 7. FOD Phase Jitter	13
Table 8. TOD and Synthesis Phase Jitter	13
Table 9. APLL Phase Noise	13
Table 10. Peak APLL Spurious Power	14
Table 11. Power Supply Noise Rejection	14
Table 12. Crystal Oscillator Input and Analog PLL AC/DC Characteristics	15
Table 13. Recommended Crystal Characteristics	15
Table 14. Clock Input (CLKIN/nCLKIN) AC/DC Characteristics	16
Table 15. Output Frequencies and Start-Up Time	16
Table 16. Phase and Frequency Uncertainty	17
Table 17. Output-to-Output Skew and Input-to-Output Delay	17
Table 18. LVCMOS Output AC/DC Characteristics	18
Table 19. LVDS Output AC/DC Characteristics	18
Table 20. HCSL Output AC/DC Characteristics	19
Table 21. CML Output AC/DC Characteristics	19
Table 22. Power Supply Current	20
Table 23. GPIO, Serial Port, and nMR DC Electrical Characteristics	21
Table 24. CMOS GPIO, Serial Port, and nMR Common Electrical Characteristics	21
Table 25. I <sup>2</sup> C Bus Target Timing	22
Table 26. I <sup>2</sup> C Bus AC/DC Electrical Characteristics	22
Table 27. SPI Target Timing	23
Table 28. Recommended Free-Running Frequency Accuracy by Application	25
Table 29. Ordering Information	35
Table 30. Pin 1 Orientation in Tape and Reel Packaging	35

## 1. Pin Information

# 1.1 Pin Assignments

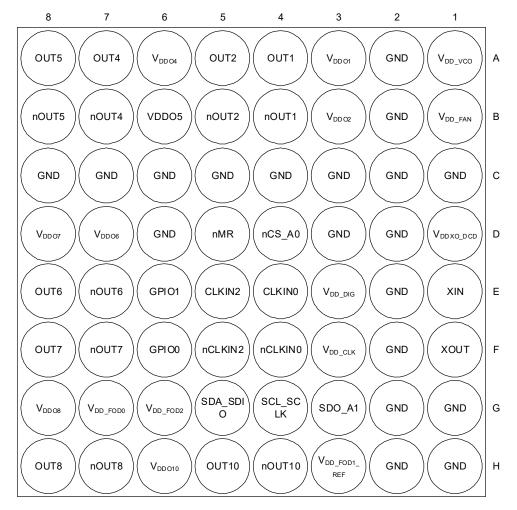


Figure 4. Pin Assignments - Bottom View

# 1.2 Pin Descriptions

**Table 1. Pin Descriptions** 

Pin Number	Pin Name	Ту	pe	Description		
A1	VDD_VCO	Power	-	Power supply for the VCO. 1.8V is supported.		
A2	GND	Power	-	Ground reference rail.		
A3	VDDO1	Power -				Power supply for OUT1 / nOUT1 and IOD1. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.
A4	OUT1	0	-	Clock output, differential pair. LVDS, HCSL, or CML. OUTx indicates the positive pin of a differential pair.		
A5	OUT2	0	-	Clock output, differential pair. LVDS, HCSL, or CML. OUTx indicates the positive pin of a differential pair.		
A6	VDDO4	Power	-	Power supply for OUT4 / nOUT4 and IOD4. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.		
A7	OUT4	0	-	Clock output, differential pair. LVDS, HCSL, or CML. OUTx indicates the positive pin of a differential pair.		

Table 1. Pin Descriptions (Cont.)

Pin Number	Pin Name	Name Type		Description		
A8	OUT5	0	-	Clock output, differential pair. LVDS, HCSL, or CML. OUTx indicates the positive pin of a differential pair.		
B1	VDD_FAN	Power	-	Power supply for internal buffering to FODs and IODs. 1.8V is supported.		
B2	GND	Power	-	Ground reference rail.		
В3	VDDO2	Power	-	Power supply for OUT2 / nOUT2 and IOD2. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.		
B4	nOUT1	0	-	Clock output, differential pair. LVDS, HCSL, or CML. nOUTx indicates the negative pin of a differential pair.		
B5	nOUT2	0	-	Clock output, differential pair. LVDS, HCSL, or CML. nOUTx indicates the negative pin of a differential pair.		
В6	VDDO5	Power	-	Power supply for OUT5 / nOUT5 and IOD5. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.		
B7	nOUT4	0	-	Clock output, differential pair. LVDS, HCSL, or CML. nOUTx indicates the negative pin of a differential pair.		
B8	nOUT5	0	-	Clock output, differential pair. LVDS, HCSL, or CML. nOUTx indicates the negative pin of a differential pair.		
C1	GND	Power	-	Ground reference rail.		
C2	GND	Power	-	Ground reference rail.		
C3	GND	Power	-	Ground reference rail.		
C4	GND	Power	-	Ground reference rail.		
C5	GND	Power	-	Ground reference rail.		
C6	GND	Power	-	Ground reference rail.		
C7	GND	Power	-	Ground reference rail.		
C8	GND	Power	-	Ground reference rail.		
D1	VDDXO_DCD	Power	-	Power supply for XIN, XOUT and DCD block. 1.8V is supported.		
D2	GND	Power	-	Ground reference rail.		
D3	GND	Power	-	Ground reference rail.		
D4	nCS_A0	I	Pull-up	I2C mode: address bit 0. SPI mode: active-low chip select. GPIO DC electrical characteristics apply to this pin.		
D5	nMR	I	Pull-up	Active-low master reset. The VDD_FOD0 pin must be powered to ensure prope operation. GPIO DC electrical characteristics apply to this pin.		
D6	GND	Power	-	Ground reference rail.		
D7	VDDO6	Power	-	Power supply for OUT6 / nOUT6 and IOD6. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.		
D8	VDDO7	Power	-	Power supply for OUT7 / nOUT7 and IOD7. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.		
E1	XIN	I	-	Crystal oscillator/ xCXO input.		
E2	GND	Power	-	Ground reference rail.		
E3	VDD_DIG	Power	-	Power supply for digital core, serial port, digital in FODs, and digital in the APLL 1.8V is supported.		
E4	CLKIN0	I	Pull-down	Clock reference input, differential pair / single-ended. CLKINx indicates the positive pin of a differential pair.		
E5	CLKIN2	I	Pull-down	Clock reference input, differential pair / single-ended. CLKINx indicates the positive pin of a differential pair.		
E6	GPIO1	I/O	Pull-up	General-purpose input/output. VDD_FOD0 must be powered to ensure proper operation.		

Table 1. Pin Descriptions (Cont.)

Pin Number	Pin Name	Clock output, differential pair. LVDS, HCSL, or CML. nOUTx		Description
E7	nOUT6	0	-	Clock output, differential pair. LVDS, HCSL, or CML. nOUTx indicates the negative pin of a differential pair.
E8	OUT6	0	-	Clock output, differential pair. LVDS, HCSL, or CML. OUTx indicates the positive pin of a differential pair.
F1	XOUT	0	-	Crystal oscillator output.
F2	GND	Power	-	Ground reference rail.
F3	VDD_CLK	Power	-	Power supply for CLKINx buffers, input dividers, muxes, and the TDC. 1.8V is supported.
F4	nCLKIN0	I	Pull-up	Clock reference input, differential pair / single-ended. nCLKINx indicates the negative pin of a differential pair.
F5	nCLKIN2	I	Pull-up	Clock reference input, differential pair / single-ended. nCLKINx indicates the negative pin of a differential pair.
F6	GPIO0	I/O	Pull-up	General-purpose input/output. VDD_FOD0 must be powered to ensure proper operation.
F7	nOUT7	0	-	Clock output, differential pair. LVDS, HCSL, or CML. nOUTx indicates the negative pin of a differential pair.
F8	OUT7	0	-	Clock output, differential pair. LVDS, HCSL, or CML. OUTx indicates the positive pin of a differential pair.
G1	GND	Power	-	Ground reference rail.
G2	GND	Power	-	Ground reference rail.
G3	SDO_A1	I/O	-	I <sup>2</sup> C mode: address bit 1. SPI 3-wire mode: unused. SPI-4 wire mode: output serial data.
G4	SCL_SCLK	I/O	Pull-up	I <sup>2</sup> C mode: I <sup>2</sup> C interface bi-directional clock. SPI mode: serial clock. GPIO DC electrical characteristics apply to this pin.
G5	SDA_SDIO	I/O	Pull-up	I <sup>2</sup> C mode: I <sup>2</sup> C interface bi-directional serial data. SPI 3-wire mode: bi-directional serial data. SPI-4 wire mode: input serial data. GPIO DC electrical characteristics apply to this pin.
G6	VDD_FOD2	Power	-	Power supply for FOD2. 1.8V is supported.
G7	VDD_FOD0	Power	-	Power supply for FOD0, nMR, GPIO0, and GPIO1. 1.8V is supported.
G8	VDDO8	Power	-	Power supply for OUT8 / nOUT8 and IOD8. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.
H1	GND	Power	-	Ground reference rail.
H2	GND	Power	-	Ground reference rail.
НЗ	VDD_FOD1_ REP	Power	-	Power supply for FOD1 and all FOD digital. 1.8V is supported.
H4	nOUT10	0	-	Clock output, differential pair / single ended. LVDS, HCSL or LVCMOS. nOUTx indicates the negative pin of a differential pair.
H5	OUT10	0	-	Clock output, differential pair / single ended. LVDS, HCSL or LVCMOS. OUTx indicates the positive pin of a differential pair.
Н6	VDDO10	Power	-	Power supply for OUT10 / nOUT10 and IOD10. 1.8V is supported. This pin may be tied to ground to minimize power consumption if the corresponding output is unused. This pin must not be allowed to float.
H7	nOUT8	0	-	Clock output, differential pair / single ended. LVDS, HCSL or LVCMOS. nOUTx indicates the negative pin of a differential pair.
H8	OUT8	0	-	Clock output, differential pair / single ended. LVDS, HCSL or LVCMOS. OUTx indicates the positive pin of a differential pair.

## 1.3 Pin Characteristics

**Table 2. Input Characteristics** 

Symbol	Paran	neter	Condition	Minimum	Typical	Maximum	Unit
C <sub>IN</sub>	Input capacitance	CLKIN/nCLKIN, nMR, nCS_A0, SDO_A1, GPIOn, SCL_SCLK, SDA_SDIO	-	-	4	-	pF
R <sub>PULLUP</sub>	Input pull-up resistor	nMR, nCLKIN, nCS_A0, SDO_A1, GPIOn	-	-	53	-	kΩ
R <sub>PULLDOWN</sub>	Input pull-down resistor	CLKIN, nCS_A0, SDO_A1, GPIOn	-	-	53	-	kΩ

# 2. Specifications

# 2.1 Absolute Maximum Ratings

**Table 3. Absolute Maximum Ratings** 

Symbol	Parameter	Condition	Minimum	Maximum	Unit	
V <sub>DD18</sub>	Supply Voltage with Respect to Ground	V <sub>DD_CLK</sub> , V <sub>DDXO_DCD</sub> , V <sub>DD_VCO</sub> , V <sub>DD_DIG</sub> , V <sub>DD_FAN</sub> , V <sub>DD_FOD1_REP</sub> , V <sub>DD_FOD0</sub> , V <sub>DD_FOD2</sub> , V <sub>DDOx</sub>	-0.5	1.89	V	
		XIN [1]	-0.5	1.32		
$V_{IN}$		GPIOx used as inputs, nMR [2]	-0.5	V <sub>DDx</sub> + 0.3		
	Input Voltage	CLKINx	-0.5	V <sub>DD_CLK</sub> + 0.3	V	
		nCS_A0, SDO_A1, SCL_SCLK, SDA_SDIO	-0.5	V <sub>DD_DIG</sub> + 0.3		
		GPIOx used as inputs, nMR	-	±25		
I <sub>IN</sub>	Input Current	CLKINX - ±50				
'IN		nCS_A0, SDO_A1, SCL_SCLK, SDA_SDIO	-	±25	mA	
		OUTx, nOUTx	-	30		
	Output Current - Continuous	LOCK, SDO_A1, SCL_SCLK, SDA_SDIO	A1, SCL_SCLK, - 25		mA	
		GPIOx used as outputs	-	25	1	
I <sub>OUT</sub>		OUTx, nOUTx	nOUTx - 3			
	Output Current - Surge	LOCK, SDO_A1, SCL_SCLK, SDA_SDIO	-	25	mA	
		GPIOx used as outputs -		25		
T <sub>JMAX</sub>	Maximum Junction Temperature	-	-	150	°C	
T <sub>S</sub>	Storage Temperature	Storage Temperature	-65	150	°C	
-	Human Body Model (Tested per JESD22-A114 (JS-001) Classification)	-	-	2000	V	
-	Charged Device Model (Tested per JESD22-C101 Classification)	-	-	500	V	

<sup>1.</sup> This limit only applies when XIN is overdriven by an external oscillator. No limit is implied when connected directly to a crystal.

# 2.2 Recommended Operating Conditions

Table 4. Recommended Operating Conditions [1][2]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
TJ	Maximum Junction Temperature	-	-	-	125	°C
T <sub>A</sub>	Ambient Operating Temperature	-	-40	-	85	°C
V <sub>DDx</sub>	Supply Voltage with Respect to Ground	V <sub>DDx</sub> pins with 1.8V supply	1.71	1.8	1.89	V
t <sub>PU</sub>	Power up time for all V <sub>DD</sub> to reach minimum specified voltage	Power ramps must be monotonic	-	-	20	ms

<sup>1.</sup> All electrical characteristics are specified over Recommended Operating Conditions unless noted otherwise.

<sup>2.</sup>  $V_{DDx}$  refers to the supply powering the GPIO. For  $V_{DD}$  pin mapping, see GPIO  $V_{DD}$  Pin Assignments.

<sup>2.</sup> All conditions in this table must be met to guarantee device functionality and performance.

## 2.3 Thermal Specifications

**Table 5. Thermal Resistance** 

Package	Symbol	Conditions	Typical Value	Unit
	Θ <sub>JC</sub>	Junction to case	15.1	
	Θ <sub>JB</sub>	Junction to base	7.8	
BJG64	Θ <sub>JA0</sub>	Junction to air, still air	24	°C/W
BJG04	Θ <sub>JA1</sub>	Junction to air, 1 m/s air flow	22	C/VV
	Θ <sub>JA3</sub> J	Junction to air, 2 m/s air flow	20	
	Θ <sub>JA5</sub>	Junction to air, 3 m/s air flow	20	

### 2.4 APLL Phase Jitter

Table 6. APLL Phase Jitter [1][2][3][4]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
	Random Phase Jitter (12kHz to 20MHz), OUT[10:1] differential,	245.76MHz	-	69	85	fs
t <sub>JIT</sub> (Φ)	APLL steered by DPLL0, BW = 25Hz, <sup>[5]</sup> CLKIN = 25MHz, XIN = 68MHz, VCO = 9.8304GHz	491.52MHz	-	48	56	RMS
t <sub>JIT</sub> (Φ)	Random Phase Jitter (12kHz to 20MHz), OUT[10:1] differential, APLL steered by DPLL0, BW = 25Hz, <sup>[5]</sup>	156.25MHz	-	62	73	fs
GII( $\Phi$ )	CLKIN = 25MHz, XIN = 68.8MHz, VCO = 9.375GHz	312.5MHz	-	58	67	RMS
t <sub>JIT</sub> (Φ)	Random Phase Jitter (12kHz to 20MHz) with 4MHz high-pass-filter, OUT[10:1] differential, APLL steered by DPLL0, BW = 25Hz, [5] CLKIN = 25MHz, XIN = 54MHz, VCO = 9.375GHz	312.5MHz	-	25	-	fs RMS
t <sub>JIT</sub> (Φ)	Random Phase Jitter (12kHz to 20MHz) with 4MHz high-pass-filter, OUT[10:1] differential, APLL configured as a synthesizer, XIN = 54MHz, VCO = 9.375GHz	312.5MHz	-	25	-	fs RMS

<sup>1.</sup> The device will meet specifications after thermal equilibrium has been reached.

<sup>2.</sup> Characterized using a Rohde and Schwarz SMA100 overdriving the crystal interface.

<sup>3.</sup> Measured after the APLL has locked and settled.

<sup>4.</sup> All outputs enabled and generating clocks with the same frequency sourced from the APLL via integer output dividers.

<sup>5.</sup> Measured after the DPLL has locked and settled using a jitter free and wander-free reference.

#### 2.5 FOD Phase Jitter

Table 7. FOD Phase Jitter [1][2][3][4]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
	Random Phase Jitter (12kHz to 20MHz), OUT[10:6] differential, APLL steered by DPLL0, BW = 25Hz, <sup>[5]</sup> CLKIN = 25MHz, XIN = 68MHz, FOD configured as a synthesizer / DCO, VCO = 9.763GHz or VCO = 10.224GHz <sup>[6]</sup>	155.52MHz	-	107	127	
		161,132,812.5MHz	-	119	140	
t <sub>JIT</sub> (Φ)		156.25MHz	-	104	127	fs RMS
		312.5MHz	-	88	112	
		625MHz	-	88	101	

- 1. The device will meet specifications after thermal equilibrium has been reached.
- 2. Characterized using a Rohde and Schwarz SMA100 overdriving the crystal interface.
- 3. Measured after the APLL has locked and settled.
- 4. All OUT[10:6] enabled and generating the same frequency sourced from the same FOD, other OUT[x] disabled.
- 5. Measured after the DPLL has locked and settled using a jitter free and wander-free reference.
- 6. See Table 12 for VCO frequencies supported by each part number.

### 2.6 TOD and Synthesis Phase Jitter

Table 8. TOD and Synthesis Phase Jitter [1][2][3][4][5]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
	Random Phase Jitter (12kHz to 20MHz),	125MHz	•	1.2	2.1	
t <sub>JIT</sub> (Φ)	OUT[10:7] differential, FOD0 configured as a synthesizer / DCO, FOD0 = 500MHz	250MHz	-	0.8	1.3	ps RMS

- 1. The device will meet specifications after thermal equilibrium has been reached.
- 2. Characterized using a Rohde and Schwarz SMA100 overdriving the XTAL interface.
- 3. Measured after the APLL has locked and settled.
- 4. All OUT[10:7] enabled and generating the same frequency, other OUT[x] disabled.
- 5. Measured after the DPLL has locked and settled using a jitter free and wander-free reference.

#### 2.7 APLL Phase Noise

Table 9. APLL Phase Noise [1][2][3][4]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
Φ <sub>SSB</sub> (10)		10Hz Offset	-	-72	-	
Φ <sub>SSB</sub> (100)		100Hz Offset	-	-104	-	
Φ <sub>SSB</sub> (1k)		1kHz Offset	-	-123	-	
Φ <sub>SSB</sub> (10k)	Single Sideband Phase Noise, OUT[7:1] differential,	10kHz Offset	-	-138	-	
Φ <sub>SSB</sub> (100k)	Carrier 245.76MHz;	100kHz Offset	-	-145	-	dBc/Hz
Φ <sub>SSB</sub> (800k)	APLL steered by DPLL0, BW = 25Hz, <sup>[5]</sup>	800kHz Offset	-	-150	-	ubc/Hz
Φ <sub>SSB</sub> (1M)	CLKIN = 25MHz from Rb timebase, XIN = 73MHz, VCO = 9.8304GHz	1MHz Offset	-	-148	-	
Φ <sub>SSB</sub> (1.72M)	,	1.72MHz Offset	-	-155	-	
Φ <sub>SSB</sub> (10M)		10MHz Offset	-	-164	-	
Φ <sub>SSB</sub> (30M)		30MHz Offset	-	-165	-	

Table 9. APLL Phase Noise [1][2][3][4] (Cont.)

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
Φ <sub>SSB</sub> (10)		10Hz Offset	-	-69	-	
Φ <sub>SSB</sub> (100)		100Hz Offset	-	-98	-	
Φ <sub>SSB</sub> (1k)		1kHz Offset	-	-117	-	
Φ <sub>SSB</sub> (10k)	Single Sideband Phase Noise, OUT[7:1] differential,	10kHz Offset	-	-132	-	
Φ <sub>SSB</sub> (100k)	Carrier 491.52MHz;	100kHz Offset	-	-139	-	dBc/Hz
Φ <sub>SSB</sub> (800k)	APLL steered by DPLL0, BW = 25Hz, <sup>[5]</sup>	800kHz Offset	-	-144	-	UDC/11Z
Φ <sub>SSB</sub> (1M)	CLKIN = 25MHz from Rb timebase, XIN = 73MHz, VCO = 9.8304GHz	1MHz Offset	-	-142	-	
Φ <sub>SSB</sub> (1.72M)	,	1.72MHz Offset	-	-150	-	
Φ <sub>SSB</sub> (10M)		10MHz Offset	-	-161	-	
Φ <sub>SSB</sub> (30M)		30MHz Offset	-	-161	-	

- 1. The device will meet specifications after thermal equilibrium has been reached.
- 2. Characterized using a Rohde and Schwarz SMA100 overdriving the crystal interface.
- 3. Measured after the DPLL and APLL have locked and settled.
- 4. All OUT[7:1] enabled and generating the same frequency.
- 5. Measured after the DPLL has locked and settled using a jitter free and wander-free reference.

## 2.8 Peak APLL Spurious Power

Table 10. Peak APLL Spurious Power [1][2][3][4][5][6]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
	Peak Spurious Power 100Hz to 100MHz,	Carrier 245.76MHz	-	-92	-	
Φ <sub>SPUR</sub>	OUT[7:1] differential, APLL steered by DPLL0, DPLL BW = 25Hz, CLKIN = 25MHz, XIN = 73MHz, VCO = 9.8304GHz	Carrier 491.52MHz;	-	-86	-	dBc

- 1. The device will meet specifications after thermal equilibrium has been reached.
- 2. Characterized using a Rohde and Schwarz SMA100 overdriving the crystal interface.
- 3. Measured after the APLL has locked and settled.
- 4. Measured after the DPLL has locked and settled using a jitter free and wander-free reference.
- 5. All OUT[7:1] enabled and generating the same frequency.
- 6. All FODs and OUT[8:11] disabled.

## 2.9 Power Supply Noise Rejection

Table 11. Power Supply Noise Rejection [1]

Symbol	Parameter	Condition [2][3][4]	Minimum	Typical	Maximum	Unit
		f <sub>NOISE</sub> = 10kHz	-	-81	-	
	Power Supply Rejection Ratio V <sub>DDx</sub> = 1.8V	f <sub>NOISE</sub> = 25kHz	-	-83	-	
PSNR		f <sub>NOISE</sub> = 50kHz	-	-80	-	dBc
FOINIX		f <sub>NOISE</sub> = 100kHz	-	-80	-	ubc
		f <sub>NOISE</sub> = 500kHz	-	-62	-	
		f <sub>NOISE</sub> = 1MHz	-	-64	-	

- 1. The device will meet specifications after thermal equilibrium has been reached.
- 2. 100mV peak-to-peak sine wave applied to any VDDO, excluding VDDO of the output being measured and excluding VDD\_VCO.
- 3. Relative to 156.25MHz carrier frequency.
- 4. Measured on any differential output.



## 2.10 Crystal Oscillator Input and APLL AC/DC Electrical Characteristics

Table 12. Crystal Oscillator Input and Analog PLL AC/DC Characteristics

Symbol	Parameter		Condition	Minimum	Typical	Maximum	Unit
-	Mode of oscillation		-	Fundamental			-
£	Innut Fraguency	Using a crystal		25	-	80	MHz
f <sub>IN</sub>	Input Frequency	Over-driving XIN input		25	-	100	IVI⊓∠
V <sub>BIAS</sub>	Bias point for XIN	Over-driving XIN input		-	0.6	-	V
V <sub>IVS</sub>	Input voltage swing for XIN	Over-driving XIN i	Over-driving XIN input		-	1.2	V
	Internal crystal  C <sub>T</sub> oscillator tuning  capacitance <sup>[1]</sup> $0x0$	xo_fixedcap_on	xobuf_digicap_x1 = 0x0 xobuf_digcap_x2 = 0x0	6.2	-	-	
6		ernal crystal	xobuf_digicap_x1 = 0xF xobuf_digcap_x2 = 0xF	-	-	10.2	<b>"</b> Γ
CT		xo_fixedcap_on	xobuf_digicap_x1 = 0x0 xobuf_digcap_x2 = 0x0	9.2	-	-	pF
		- '-	xobuf_digicap_x1 = 0xF xobuf_digcap_x2 = 0xF	-	-	13.2	
£	Analog PLL VCO	RC38208x1xx / R	C38108x1xx	9.8	-	10.35	GHz
$f_{VCO}$	Operating Frequency	RC38208x2xx / R	C38108x2xx	9.25	-	9.85	GHz
F <sub>TOL</sub>	Frequency Tolerance [2][3][4][5]	-40°C to 85°C		-450	-	450	PPM

<sup>1.</sup> For applications where the XIN input is overdriven, xo\_buf\_digicap\_x1, xo\_buf\_digicap\_x2, and xo\_fixedcap\_on should all be set to 0x0 for best phase noise performance.

## 2.11 Recommended Crystal Characteristics

**Table 13. Recommended Crystal Characteristics** 

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
ESR	Equivalent Series Resistance	8pF ≤ C <sub>L</sub> ≤ 10pF	-	-	50	Ω
C <sub>O</sub>	Shunt Capacitance	-	-	-	4	pF
C <sub>L</sub>	Load Capacitance	-	-	-	10	pF
Drive	Drive Level [1]	C <sub>L</sub> = 8pF	-	160	-	μW
Dilve		C <sub>L</sub> = 10pF	-	225	-	μνν
F <sub>TOL</sub>	Frequency Tolerance	-		See F <sub>TOL</sub> in Table 12 and APLL Frequency Reference		-

<sup>1.</sup> Refers to power in the crystal (equivalent series resistance).

<sup>2.</sup> F<sub>TOL</sub> refers to the frequency accuracy of the APLL frequency reference, either a crystal connected between XIN and XOUT, or an oscillator connected to XIN and overdriving the crystal interface. The APLL can reliably lock to a reference that meets the F<sub>TOL</sub> limits.

<sup>3.</sup> Inclusive of initial tolerance at 25°C, temperature stability, and aging.

<sup>4.</sup> The APLL frequency steering range (±F<sub>STEER</sub>) available for a DPLL or DCO to digitally steer the APLL is determined by the following expression:
F<sub>STEER</sub> = |F<sub>TOL</sub>| - |F<sub>ACC</sub>|; where F<sub>ACC</sub> is the frequency accuracy of the APLL frequency reference. For example, if the frequency accuracy of the APLL frequency reference is ±100PPM. then the APLL frequency steering range will be ±350PPM.

<sup>5.</sup> The frequency accuracy of the APLL frequency reference should be chosen to meet the free-running frequency requirements of the application, and to allow sufficient frequency steering range for a DPLL or DCO to lock the APLL to its reference and to track reference noise. For more information, see APLL Frequency Reference.

## 2.12 Clock Input (CLKIN/nCLKIN) AC/DC Characteristics

Table 14. Clock Input (CLKIN/nCLKIN) AC/DC Characteristics

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
V <sub>IPP</sub>	Differential input peak-to-peak voltage [1]	-	0.15	-	1.20	V
V <sub>CMR</sub>	Differential input common mode voltage <sup>[2]</sup>	PMOS buffer (HCSL) input	V <sub>I(PP)</sub> / 2	0.35	V <sub>DD_CLK</sub> - 1.2	V
V CMR		NMOS buffer (LVDS) input	0.7	-	V <sub>DD_CLK</sub> - V <sub>I(PP)</sub>	V
F <sub>IN</sub>	Input frequency	Differential input	-	-	1000	MHz
' IN		Single-ended input	-	-	250	IVII IZ
F <sub>PD</sub>	DPLL phase detector frequency [3]	-	0.001	-	33	MHz
	Differential input high current, CLKIN	V <sub>IN</sub> = V <sub>DD_CLK (max)</sub>	-	-	150	μA
I <sub>IH</sub>	Differential input high current, nCLKIN		-	-	5	μΑ
	Differential input low current, CLKIN		-5	-	-	
I <sub>IL</sub>	Differential input low current, nCLKIN	V <sub>IN</sub> = 0V	-150	-	-	μΑ
V <sub>IH</sub>	Input high voltage	V <sub>DD_CLK</sub> = V <sub>DD_CLK (max)</sub>	0.65 × V <sub>DD_CLK</sub>	-	V <sub>DD_CLK</sub> + 0.3	V
V <sub>IL</sub>	Input low voltage	V <sub>DD_CLK</sub> = V <sub>DD_CLK (max)</sub>	-0.3	-	0.35 x V <sub>DD_CLK</sub>	٧
I <sub>IH</sub>	Input high current	V <sub>IN</sub> = V <sub>DD_CLK (max)</sub>	-	-	50	μΑ
I <sub>IL</sub>	Input low current	V <sub>IN</sub> = 0V	-50	-	-	μA

<sup>1.</sup> Single-ended value.

## 2.13 Output Frequencies and Start-Up Time

Table 15. Output Frequencies and Start-Up Time

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
f <sub>ОИТ</sub>	Output Frequency	OUT[7:1]: CML	DC	-	2500	
		OUT[10:1]: LVDS, HCSL	DC	-	1000	MHz
		OUT[10:8]: LVCMOS	DC	-	250	
Δf <sub>OUT</sub>	Output frequency tuning resolution	Fractional Output Divider	-	-	0.1	PPT
t <sub>Start-up</sub>	Start-up time [1][2]	Synthesizer mode	-	28	31	ms

<sup>1.</sup> Measured from when all power supplies have reached > 90% of nominal voltage to the first stable clock edge on the output. A stable clock is defined as one generated from a locked PLL (as appropriate for the configuration listed) with no further perturbations in frequency expected. Includes time needed to load a configuration from internal OTP.

<sup>2.</sup> Common mode is defined as the cross-point.

<sup>3.</sup> Internal input dividers may be used to reduce the CLKIN/nCLKIN frequency to be within the valid range.

<sup>2.</sup> Start-up time will depend on the actual configuration used. For more information, please contact Renesas Technical Support.

## 2.14 Phase and Frequency Uncertainty

Table 16. Phase and Frequency Uncertainty [1][2]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
Δt <sub>HS</sub>	Output phase change using hitless reference switching	-	-	-	210	ps
Δf <sub>HO</sub>	Initial frequency offset entering holdover	Using holdover filter with 1mHz bandwidth and allowing settling time of 1 hour	-	-	0.2	PPB
Δt <sub>HO</sub>	Initial phase shift entering holdover	Using LOS monitor to disqualify	-	-	17	ps

<sup>1.</sup> The device will meet specifications after thermal equilibrium has been reached.

## 2.15 Output-to-Output Skew and Input-to-Output Delay

Table 17. Output-to-Output Skew and Input-to-Output Delay [1][2]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
+	Output-to-output skew differential outputs [3][4]	Any two outputs from the same APLL or FOD source	-	25	50	ps
t <sub>SK</sub>	Output-to-output skew LVCMOS outputs [3][4]	Any two outputs from the same APLL or FOD source	-	43	86	
t <sub>SK_SR</sub>	Output-to-output skew between SYSREF and Device Clock incident edge	Differential outputs. Zero phase compensation.	-	24	50	ps
Δt <sub>SK</sub>	Output-to-output skew temperature variation [4]	Single device, at a fixed voltage, over temperature	-	0.02	0.10	ps/°C
ΔiSK	Output-to-output skew variation [3]	Single device, over process, temperature and voltage	-	0.08	0.80	
<b>t</b>	Input-to-output delay differential inputs and differential outputs [5][6]	DC-coupled input, any CLKINx to any OUTx via any DPLLx	0.67	1.13	1.65	ns
t <sub>PD</sub>		AC-coupled input, any CLKINx to any OUTx via any DPLLx	0.75	1.24	1.69	IIS
Λt	Input-to-output delay variation <sup>[5][6]</sup>	DC-coupled input, fixed voltage, over temperature	-	0.5	0.8	ne/°C
Δt <sub>PD</sub>		AC-coupled input, fixed voltage, over temperature	-	1.0	1.4	- ps/°C

<sup>1.</sup> The device will meet specifications after thermal equilibrium has been reached.

6. Measured after the DPLL has locked and settled using a jitter free and wander-free reference to the DPLL.

<sup>2.</sup> Measured after the DPLL has locked and settled using a jitter free and wander-free reference.

<sup>2.</sup> Measured across the full operating temperature range.

<sup>3.</sup> Defined as the time between the rising edges of two outputs of the same frequency, configuration, loading, and supply voltage.

<sup>4.</sup> This parameter is defined in accordance with JEDEC Standard 65.

<sup>5.</sup> Input-to-output delay is defined as the time between the rising edge of a reference clock at CLKINx and the associated rising edge of an output clock at OUTx that is locked to the reference by the DPLL. The reference clock and the output clock must have the same frequency and the reference input dividers must be bypassed.

## 2.16 LVCMOS Output AC/DC Characteristics

Table 18. LVCMOS Output AC/DC Characteristics [1]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
V <sub>OH</sub>	Output high voltage [2]	I <sub>OH</sub> = -2mA	V <sub>DDO</sub> - 0.45	-	-	V
V <sub>OL</sub>	Output low voltage [2]	I <sub>OL</sub> = 2mA	-	-	0.45	V
V <sub>OH</sub>	Output high voltage [2]	I <sub>OH</sub> = -100μA	V <sub>DDO</sub> - 0.2	-	-	V
V <sub>OL</sub>	Output low voltage [2]	I <sub>OL</sub> = 100μA	-	-	0.2	V
I <sub>OZ</sub>	Output leakage current	Outputs tri-stated	-5	-	5	μΑ
7	DC output impedance	At 25°C, out_cmos_same_phase = 0	-	24	-	Ω
Z <sub>OUTDC</sub>	DC output impedance	At 25°C, out_cmos_same_phase = 1	-	34	-	22
t <sub>R</sub> /t <sub>F</sub>	Rise/Fall time, 20% to 80%	-	140	214	295	ps
		From APLL, even IOD divide	47	50	55	
		From APLL, odd IOD divide ≥ 3	49	52	55	
$t_{DC}$	Output duty cycle	From FOD, even IOD divide	47	50	51	%
		From FOD, odd IOD divide ≥ 3	50	50	51	
		From FOD with IOD divide = 1	46	49	52	

<sup>1.</sup> Measured with outputs terminated with  $50\Omega$  to  $V_{DDO}/2$ .

# 2.17 LVDS Output AC/DC Characteristics

Table 19. LVDS Output AC/DC Characteristics [1]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
		out_boost = 0x0	266	373	440	
\/	O., to t   t   [2][3]	out_boost = 0x1	220	440	F04	
$V_{OD}$	Output voltage swing [2][3]	out_boost = 0x2	336	448	521	mV
	out_boost = 0x3	392	501	586		
		out_boost = 0x0	1188	1227	1306	
\/	Office to valtage [3]	out_boost = 0x1	4004	11.00	4044	\/
V <sub>OS</sub>	Offset voltage [3]	out_boost = 0x2	1084	1163	1241	mV
		out_boost = 0x3	1005	1114	1185	
		out_boost = 0x0	-	3	33	
A) /	Change in VOS between complimentary output states [3]	out_boost = 0x1	-	4	39	mV
$\Delta V_{OS}$		out_boost = 0x2		4		
		out_boost = 0x3	-	3	46	
		out_boost = 0x0	65	179	415	
4 /4	Dis a / 5 a     4 in a   000 / 4 a   000 /	out_boost = 0x1	70	477	404	
$t_R/t_F$	Rise/Fall time, 20% to 80%	out_boost = 0x2	73	177	404	ps
		out_boost = 0x3	76	176	385	
		From APLL, even IOD divide	46	50	52	
		From APLL, odd IOD divide ≥ 3	48	50	50	
	Outside the souls	From APLL with IOD divide = 1	43	48	51	%
t <sub>DC</sub>	Output duty cycle	From FOD, even IOD divide	49	50	51	
		From FOD, odd IOD divide ≥ 3	50	50	51	
		From FOD with IOD divide = 1	46	49	52	1

<sup>1.</sup> Terminated with  $100\Omega$  across OUTx and nOUTx, out\_pull\_down = 0x0, out\_pull\_up = 0x0.



<sup>2.</sup> These values are compliant with JESD8-7A.

- 2. Single-ended measurement.
- 3. Tested at 10MHz.

# 2.18 HCSL Output AC/DC Characteristics

Table 20. HCSL Output AC/DC Characteristics [1]

Symbol	Parameter	Condition	Condition		Typical	Maximum	Unit
		out_boost = 0x0	-	673	801	960	
\ \ <u>\</u>	Output voltage swing	out_boost = 0x1	-	745	930	1125	mV
V <sub>OVS</sub>	[2][3][4]	out_boost = 0x2	-	745	930	1123	IIIV
		out_boost = 0x3	-	850	995	1211	
V <sub>CM</sub>	Common mode [3]	out_boost = Any	-	387	414	441	mV
t_ /t_	Rise/Fall time, 20% to	out boost = Any	From APLL, FOD[0]	100	172	268	ne
t <sub>R</sub> /t <sub>F</sub>	80%	Out_boost = Ally	From FOD[2:1]	140	235	365	ps
		From APLL, even IOD divide	-	47	49	51	
		From APLL, odd IOD divide ≥ 3	-	48	49	51	
<b>t</b>	Outrast data and	From APLL with IOD divide = 1	-	44	47	51	%
t <sub>DC</sub>	Output duty cycle	From FOD, even IOD divide	-	49	50	51	70
		From FOD, odd IOD divide ≥ 3	-	49	50	51	
		From FOD with IOD divide = 1	-	47	50	52	

- 1. Terminated with  $50\Omega$  to ground on each of OUTx and nOUTx, out\_pull\_down = 0x0, out\_pull\_up = 0x0.
- 2. Single-ended measurement.
- 3. Output frequency = 10MHz.
- 4. At 312.5MHz, when outboost = 0x3:  $V_{OVS}$  Minimum = 0.8V and Maximum = 1.2V.

# 2.19 CML Output AC/DC Characteristics

Table 21. CML Output AC/DC Characteristics [1]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
V <sub>OH</sub>	Output high voltage	-	-	1800	-	mV
		out_boost = 0x0	676	766	831	
V	Output voltage swing [2][3]	out_boost = 0x1	790	901	993	mV
V <sub>OVS</sub>	Output voltage swilig 1-31-3	out_boost = 0x2	790	901	993	IIIV
		out_boost = 0x3	860	983	1093	
t <sub>R</sub> /t <sub>F</sub>	Rise/Fall time, 20% to 80%	out_boost = Any	171	249	320	ps
		From APLL, even IOD divide	48	50	51	
		From APLL, odd IOD divide ≥ 3	49	50	51	
		From APLL with IOD divide = 1	44	47	50	%
t <sub>DC</sub>	Output duty cycle	From FOD, even IOD divide	46	49	52	70
		From FOD, odd IOD divide ≥ 3	49	50	51	
		From FOD with IOD divide = 1	47	49	51	

- 1. Terminated with  $50\Omega$  to  $V_{DDOx}$  on each of OUTx and nOUTx, out\_pull\_down = 0x0, out\_pull\_up = 0x0.
- 2. Single-ended measurement.
- 3. Output frequency = 10MHz.

# 2.20 Power Supply Current

Table 22. Power Supply Current [1]

Symbol	Parameter		Condition	Typical	Maximum	Unit
I <sub>DD_CLK</sub>	Supply current for V <sub>DD CLK</sub>	supplied to a	] enabled, single ended and DPLL, Time Sync TDC enabled, I to the TDCAPLL	28	55	mA
	35_55.	All CLKIN[3:0 to a DPLL	All CLKIN[3:0] enabled, differential and supplied to a DPLL		32	
I <sub>DDXO_DCD</sub>	Supply current for V <sub>DDXO_DCD</sub>	V <sub>DDXO_DCD</sub> =	: 1.89V	49	54	mA
I <sub>DD_VCO</sub>	Supply current for V <sub>DD_VCO</sub>	V <sub>DD_VCO</sub> = 1.	89V	162	171	mA
		V <sub>DD_DIG</sub> = 1.8 I <sub>DD_FODDIGBA</sub>	39V, All FODs off ASE	40	46	
I <sub>DD_DIG</sub>	Supply current for V <sub>DD_DIG</sub>	V <sub>DD_DIG</sub> = 1.8 Current adde I <sub>DD_PERFODD</sub>	r for one FOD at 120MHz	7	11	mA
			39V or 3.465V r for one FOD at 793MHz :RMHZ	9	15	
			V <sub>DDOx_FODx</sub> = 1.89V Current with the FOD off		5	
I <sub>DD_FODx</sub>	Supply current for V <sub>DDOx_FODx</sub> <sup>[2]</sup>	V <sub>DDOx_FODx</sub> = Current adde	= 1.89V r for one FOD at 120MHz	42	47	mA
		V <sub>DDOx_FODx</sub> = Current adde IFODDIG793	r for one FOD at 793MHz	51	57	
I <sub>DD_REP</sub>	Supply current for V <sub>DD_REP</sub>	V <sub>DD_REP</sub> = 1.	89V	8	9	mA
I <sub>DD_FAN</sub>	Supply current for V <sub>DD_FAN</sub>	V <sub>DD_FAN</sub> = 1.	89V	122	156	mA
			out_boost = 0x0	24	29	
I <sub>DDOx</sub> [3]	Supply current for V <sub>DDOx</sub>	HCSL mode,	out_boost = 0x1	27	32	mA
TODOX 5 5	Cupply cultone for VDDOX	245.76MHz	out_boost = 0x2		02	
			out_boost = 0x3	28	34	
			out_boost = 0x0			
I <sub>DDOx</sub> [3]	Supply current for V <sub>DDOx</sub>	LVDS mode,	out_boost = 0x1	14	18	mA
DDOX		245.76MHz	out_boost = 0x2			
			out_boost = 0x3			
			out_boost = 0x0			
I <sub>DDOx</sub> [3]	Supply current for V <sub>DDOx</sub>	CML mode,	out_boost = 0x1	2	11	mA
DDOX	TT 7 BBOX	out_boo				111/4
		out_boost = 0x3				
I <sub>DDOx</sub> [3]	Supply current for V <sub>DDOx</sub>	LVCMOS	out_cmos_same_phase = 0x0	3	29	mA
	-	mode	out_cmos_same_phase = 0x1	3	36	
I <sub>DDOx</sub> [3]	Supply current for V <sub>DDOx</sub>	Output disabl	ed	2	5	mA

 $<sup>1. \ \</sup> Internal \ dynamic \ switching \ current \ at \ maximum \ f_{OUT} \ is \ included, \ unless \ otherwise \ noted.$ 

<sup>2.</sup> For  $I_{DD\ FOD0}$  this value does not include supply currents for GPIO outputs.

<sup>3.</sup> Measured with outputs unloaded.

## 2.21 GPIO, Serial Port, and nMR DC Electrical Characteristics

Table 23. GPIO, Serial Port, and nMR DC Electrical Characteristics [1][2][3][4]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
V <sub>IH</sub>	Input high voltage	-	0.6 x V <sub>DDx</sub>	-	V <sub>DDx</sub> + 0.3	V
V <sub>IL</sub>	Input low voltage	-	-0.3	-	0.4 x V <sub>DDx</sub>	V
V <sub>OH</sub>	Output high voltage	I <sub>OH</sub> = -2mA	V <sub>DDx</sub> - 0.45	-	V <sub>DDx</sub> + 0.3	V
V <sub>OL</sub>	Output low voltage	I <sub>OL</sub> = 2mA	-	-	0.45	V
V <sub>OH</sub>	Output high voltage	I <sub>OH</sub> = -100μA	V <sub>DDx</sub> - 0.2	-	V <sub>DDx</sub> + 0.3	V
V <sub>OL</sub>	Output low voltage	I <sub>OL</sub> = 100μA	-	-	0.2	V

- 1. Applies to GPIO[4:0], SCL\_SCLK, SDA\_SDIO, SDO\_A1, nCS\_A0, and nMR.
- 2. Input specifications refer to pins acting as inputs, output specifications refer to pins acting as outputs.
- 3. V<sub>DDx</sub> refers to V<sub>DD\_DIG</sub> for SCL\_SCLK, SDA\_SDIO, SDO\_A1, and nCS\_A0; and it refers to V<sub>DD\_FOD0</sub> for GPIO[4:0] and nMR (see Pin Assignments).
- 4. Values are compliant with JESD8-7A.

## 2.22 CMOS GPIO, Serial Port, and nMR Common Electrical Characteristics

Table 24. CMOS GPIO, Serial Port, and nMR Common Electrical Characteristics [1][2][3]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
I <sub>IL</sub>	Input leakage current	Does not include input pull- up/pull-down resistor current. V <sub>IL</sub> = 0V, V <sub>IH</sub> = V <sub>DDx</sub>	-50	-	50	μA
R <sub>P</sub>	Pull-up/pull-down resistor	If enabled	-	53	-	kΩ

- 1. Applies to GPIO[4:0], SCL\_SCLK, SDA\_SDIO, SDO\_A1, nCS\_A0, and nMR.
- 2. Input specifications refer to pins acting as inputs, output specifications refer to pins acting as outputs.
- V<sub>DDx</sub> refers to V<sub>DD\_DIG</sub> for SCL\_SCLK, SDA\_SDIO, SDO\_A1, and nCS\_A0; and it refers to V<sub>DD\_FOD0</sub> for GPIO[4:0] and nMR (see Pin Assignments).

# 2.23 I<sup>2</sup>C Bus Target Timing Diagram

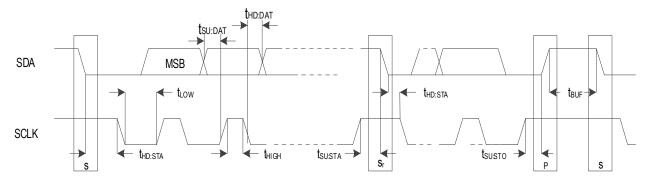


Figure 5. I<sup>2</sup>C Bus Target Timing Diagram

# 2.24 I<sup>2</sup>C Bus Target Timing

Table 25. I<sup>2</sup>C Bus Target Timing

Symbol	Parameter	Condition	Minimum	Maximum	Unit
f <sub>SCL</sub>	SCL clock frequency	-	10	1000	kHz
t <sub>HD:STA</sub>	Hold time after (REPEATED) START Condition	-	0.26	-	μs
t <sub>LOW</sub>	Clock low period	-	0.5	-	μs
t <sub>HIGH</sub>	Clock high period	-	0.26	-	μs
t <sub>SU:STA</sub>	REPEATED START Condition setup time	-	0.26	-	μs
t <sub>HD:DAT</sub>	Data hold time	-	0	-	ns
t <sub>SU:DAT</sub>	Data setup time	-	50	-	ns
t <sub>SU:STO</sub>	STOP condition setup time	-	0.26	-	μs
t <sub>BUF</sub>	Bus free time between STOP and START Condition	-	0.5	-	μs
t <sub>SPIKE</sub>	Noise spike suppression time [1]	i2c_spike_fltr = 0x3	-	50	ns

<sup>1.</sup> Device rejects noise spikes of a duration up to the maximum specified value.

# 2.25 I<sup>2</sup>C Bus AC/DC Electrical Characteristics

Table 26. I<sup>2</sup>C Bus AC/DC Electrical Characteristics [1]

Symbol	Parameter	Condition	Minimum	Typical	Maximum	Unit
V <sub>IH</sub>	High-level input voltage for SCL_SCLK and SDA_SDIO	-	0.6 x V <sub>DD_DIG</sub>	-	-	V
V <sub>IL</sub>	Low-level input voltage for SCL_SCLK and SDA_SDIO	-	-	-	0.4 x V <sub>DD_DIG</sub>	V
V <sub>HYS</sub>	Hysteresis of Schmitt trigger inputs	-	0.05 x V <sub>DDD_DIG</sub>	-	-	V
V <sub>OL</sub>	Low-level output voltage for SDA_SDIO	I <sub>OL</sub> = 4mA	-	-	0.4	V
I <sub>IN</sub>	Input leakage current per pin	-	[2]	-	[2]	μA

<sup>1.</sup> VOH is governed by the  $V_{PUP}$ , the voltage rail to which the pull-up resistors are connected.

<sup>2.</sup> See Table 24.

# 2.26 SPI Target Timing Diagrams

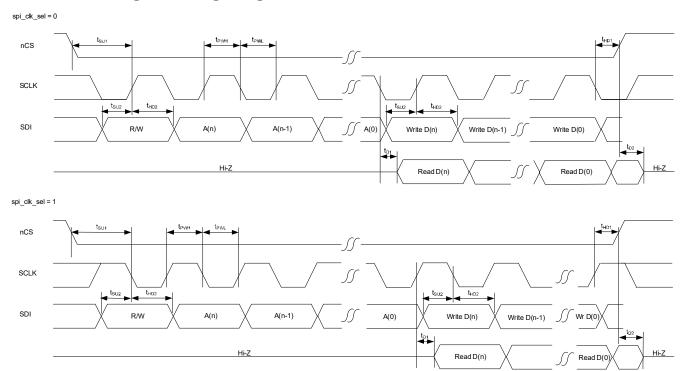


Figure 6. SPI Timing Diagrams

# 2.27 SPI Target Timing

**Table 27. SPI Target Timing** 

Symbol	Parameter	Minimum	Typical	Maximum	Unit
f <sub>MAX</sub>	Maximum operating frequency	0.1	-	20	MHz
t <sub>PWH</sub>	SCLK pulse width high	14	-	-	ns
t <sub>PWL</sub>	SCLK pulse width low	14	-	-	ns
t <sub>SU1</sub>	nCS setup time to SCLK rising or falling edge	10	-	-	ns
t <sub>HD1</sub>	nCS hold time from SCLK rising or falling edge	2	-	-	ns
t <sub>SU2</sub>	SDIO setup time to SCLK rising or falling edge	4	-	-	ns
t <sub>HD2</sub>	SDIO hold time from SCLK rising or falling edge	3	-	-	ns
t <sub>D1</sub>	Read data valid time from SCLK rising or falling edge	4.7	-	7.4	ns
t <sub>D2</sub>	SDIO read data Hi-Z time from CS high [1]	-	-	14.5	ns

<sup>1.</sup> This is the time until the device releases the signal. Rise time to any specific voltage is dependent on pull-up resistor strength and PCB trace loading.

# 3. Functional Description

#### 3.1 Overview

The RC38208/RC38108 is an ultra-low phase noise radio synchronizer, multi-frequency clock synthesizer, and digitally controlled oscillator (DCO). This flexible, low-power device outputs clocks with ultra-low, in-band phase noise and spurious for 4G and 5G RF transceivers and with jitter below 25fs-rms for 112Gbps and 224Gbps SerDes.

The RC38208/RC38108 both have two differential clock inputs and eight differential clock outputs. The RC38208 provides two digital PLLs (DPLL) and the RC38108 provides one DPLL. Both devices provide an ultra-low phase noise analog PLL (APLL) based clock synthesizer, and three low phase noise fractional output divider (FOD) based clock synthesizers. For device block diagrams, see Figure 2 and Figure 3.

The differential clock inputs can each be configured as two single-ended inputs. The clock inputs can operate at frequencies up to 1GHz for differential and 250MHz for single-ended.

Six of the differential outputs can be configured for LVDS, HCSL (AC-LVPECL), or CML. Two of the differential outputs can be configured as LVDS or HCSL (AC-LVPECL) outputs, or they can each be configured as two LVCMOS outputs. The LVDS and HCSL (AC-LVPECL) outputs can operate at frequencies up to 1GHz, the CML outputs can operate at frequencies up to 2.5GHz, and the LVCMOS outputs can operate at frequencies up to 250MHz.

### 3.2 APLL Frequency Reference

The RC38208/RC38108 requires an APLL frequency reference. The frequency reference must support the phase noise, frequency accuracy, and frequency stability requirements of the intended application.

The frequency reference can be implemented using an external crystal resonator connected between the XIN and XOUT pins and the device oscillator circuitry. Alternatively, an external oscillator can be connected to the XIN pin to overdrive the internal oscillator circuitry.

If a crystal resonator is used for the frequency reference, the resonant frequency must be from 25MHz to 80MHz. If an external oscillator is used, it must provide a low-phase noise clock with frequency from 25MHz to 100MHz. For frequency reference requirements, see Table 12 and Table 13.

For all applications, the phase noise of the frequency reference, after filtering by the APLL, is the minimum phase noise that will appear on all clocks output by the device.

For DPLL applications, the accuracy of the frequency reference determines the frequency accuracy of the reference monitors and free-running clocks. The stability of the frequency reference determines the holdover stability of the DPLL and it affects the lowest filtering bandwidth the DPLL can support.

For DCO applications, the accuracy of the frequency reference determines the frequency accuracy of the freerunning clocks. The stability of the frequency reference determines the stability of the DCO clocks when a source of synchronization is not available, and it affects the lowest filtering bandwidth that a filtering algorithm can support.

The accuracy of the frequency reference should be chosen to meet the free-running frequency accuracy requirements of the application (see Table 28 for examples) and to allow sufficient APLL frequency steering range for a DPLL or DCO to lock the APLL to its reference and to track reference noise.

The available APLL frequency steering range ( $\pm F_{STEER}$ ) is determined by the following expression:  $F_{STEER} = |F_{TOL}| - |F_{ACC}|$ ; where  $F_{ACC}$  is the accuracy of the frequency reference. See Table 12 for the value of  $F_{TOL}$  and for additional details.



Table 28. Recommended Free-Running Frequency Accuracy by Application

Application	Recommended Free-Running Frequency Accuracy (PPM)
PCIe Free-running clock synthesizer	±100
Most Ethernet types  Jitter attenuator or free-running clock synthesizer	±100
800GBASE-xR8, 10GBASE-T  Jitter attenuator or free-running clock synthesizer	±50
100GBASE-ZR, 10GBASE-W  Jitter attenuator or free-running clock synthesizer	±20
ITU-T G.8262, G.8262.1 SEC, EEC, OEC, eSEC, eOEC	±4.6
<b>ITU-T G.8273.2, G.8273.3</b> T-BC, T-TSC, T-BC-A, T-TSC-A, T-BC-P, T-TSC-P	±4.6

### 3.3 Analog PLL

The internal APLL has a bandwidth of approximately 1MHz, it locks to the frequency reference and synthesizes an ultra-low phase noise clock of virtually any frequency from 9.70GHz to 10.40GHz, or from 9.30GHz to 10.0GHz, depending on the version of the device. The APLL inherits the frequency accuracy of the frequency reference and this determines the free-run frequency accuracy of the device.

The APLL can be assigned as the primary synthesizer for DPLL0 and its FFO can be steered by DPLL0. When DPLL0 is locked to a reference, the APLL output clock and its derivatives have the same long-term frequency accuracy as the reference.

The APLL output clock is pre-divided by 2, 3, 5, or 7 and is available to the integer output dividers (IOD). The pre-divided APLL clock is available directly to IOD[5:1]; it is also available via cross-connect to IOD[10:6]. The undivided APLL clock is supplied to FOD[3:0].

## 3.4 Integer Output Dividers

Each IOD divides its input clock by a programmable 23-bit integer value.

## 3.5 Fractional Output Dividers

The FODs divide the APLL clock to synthesize low phase noise clocks with programmable frequencies. The FODs are capable of integer division, rational division (that is, M/N), and fractional division with 1 part per trillion frequency resolution. The FOD output clocks are available via cross-connect to IOD[10:6].

When configured for fractional division, the FODs can operate as DCOs, and they can cancel digital frequency adjustments made to the APLL via the Combo Bus so that their output frequencies are virtually unaffected by digital steering of the APLL. The frequency steering range of the FODs is ±244PPM.

# 3.6 Divider Synchronization

For each DPLL, the feedback divider is synchronized with the IODs selected to divide the output of its synthesizer. The rising edges of clocks from these dividers will be aligned for every Nth rising edge of the synthesizer clock, where N is the lowest common multiple of the accumulated divide ratios along the paths from the synthesizer to the divider outputs.

Consider the following example: DPLL0 uses the APLL as its synthesizer. The DPLL is locked to a 1kHz input reference and the APLL is operating at 10GHz. The pre-divider supplies a 5GHz clock to IOD1, IOD2, and the DPLL feedback divider. IOD1 uses a divide ratio of 40 to produce a 125MHz clock, IOD2 uses a divide ratio of 625,000 to produce an 8kHz clock, and the DPLL feedback divider uses a divide ratio of 5,000,000 to produce 1kHz at the DPLL phase detector. In this example, the lowest common multiple of the divisors along the three



paths is 10,000,000. Therefore, the outputs of IOD1 and IOD2 will be aligned with the input reference once for every 10,000,000 edges of the 10GHz clock. In other words, the 1kHz reference, the 8kHz and the 125MHz clocks will be aligned for every edge of the 1kHz input reference (excluding the effects of reference noise and DPLL filtering).

#### 3.7 Digital PLLs

Up to four of the clock inputs can be selected as inputs for the reference monitors and the DPLL reference selection multiplexer. The DPLLs can lock to reference frequencies from 1kHz to 33MHz; clock inputs with frequencies above 33MHz must be divided using the internal reference dividers. Each DPLL steers its respective synthesizer (APLL or FOD) using digital frequency control words via the Combo Bus. The DPLLs support loop filter settings from 1mHz to 1kHz.

In DCO mode, the DPLLs do not lock to an input reference and its frequency is steered by external software instead.

The DPLLs operate in five states: Free-run, Acquire, Normal, Holdover, and Hitless Switch.

#### 3.7.1 DPLL Free-Run State

In the Free-run state, a DPLL does not generate frequency control words and its respective synthesizer operates based on the frequency reference, and, if so configured, on information from other channels via the Combo Bus.

#### 3.7.2 DPLL Acquire State

In the Acquire state, a DPLL tracks the selected qualified reference with the acquisition bandwidth and damping factor settings until the DPLL declares lock. The acquisition bandwidth and damping factor can be configured to accelerate the locking process. When a DPLL achieves lock it automatically transitions to the Normal state.

#### 3.7.3 DPLL Normal State

In the Normal state, a DPLL tracks the selected reference with the normal locking bandwidth and damping factor settings. The normal bandwidth and damping factor can be configured to meet the filtering requirements of the intended application. In the Normal state, the long-term FFO of the DPLL synthesizer output clocks is the same as the long-term FFO of the reference and no cycle slips will occur.

#### 3.7.4 DPLL Holdover State

In the Holdover state, a DPLL outputs digital frequency control words based on data acquired while in the Normal state so that its synthesizer outputs accurate frequencies when a reference is not provided to the DPLL. While a DPLL is in the Holdover state, its synthesizer operates based on the frequency reference, the DPLL holdover data, and, if so configured, on information from other channels via the Combo Bus.

#### 3.7.5 DPLL Hitless Switch State

In the Hitless Switch state, the DPLL enters Holdover and measures the phase offset between the selected reference and the DPLL feedback clock. The measured phase offset is stored by the DPLL and is used to minimize the phase transient at the output of the DPLL when it locks to the new reference.

#### 3.8 DPLL External Feedback

In some applications it is useful to use an external feedback path from the synthesizer to the DPLL. The DPLL reference selection multiplexer can select one of the external references for use as the feedback clock for the DPLL. When external feedback is used, the feedback clock must have the same frequency as the selected DPLL reference.

### 3.9 DPLL Reference Switching

The active reference for a DPLL is determined by forced selection or by automatic selection based on user-programmed priorities, locking allowances, reference monitors, revertive and non-revertive settings, and GPIO LOS inputs.



A DPLL will act to close phase differences between the selected reference and the feedback clock. A step change in the phase difference can occur when a new reference is selected while the DPLL is in the Acquire state or the Normal state, or when the DPLL exits the Holdover state and enters the Acquire state. The resulting phase transient is filtered by the DPLL loop filter and the phase slope limiter, and there will not be any instantaneous phase steps or glitches on the device outputs.

#### 3.9.1 Hitless Reference Switching

Hitless reference switching causes a DPLL to ignore the phase difference between the newly selected reference and the DPLL feedback clock; the DPLL will track the FFO of the newly selected reference.

When hitless reference switching is enabled – and a DPLL is in the Acquire state or the Normal state, and the selected reference is changed – the DPLL enters the Holdover state and measures the phase offset between the newly selected reference and the DPLL feedback clock. The measured phase offset is stored and is subtracted from later phase offsets measured by the DPLL phase detector. The DPLL then enters the Acquire state.

When the DPLL is in the Holdover state due to a reference failure or any other reason, hitless reference switching can be used when entering the Acquire state.

#### 3.9.2 Aligned Reference Switching

Hitless reference switching does not allow a deterministic phase relationship to exist between the DPLL reference and its output clocks. When a deterministic phase relationship is needed, hitless reference switching should not be enabled so that the DPLL can align its output clocks with the DPLL reference.

### 3.10 Clock Output Enable

The RC38208/RC38108 enables and disables clock outputs synchronously to ensure there are no runt pulses during clock output enable and disable operations.

Clock output enables can be controlled by software using the global\_oe and out\_driver\_en register fields. Alternatively, GPIOs can be assigned the clock output enable function using the oe\_source\_sel and gpio\_func register fields. For more information, see the RC38312, RC38112, RC38208, RC38108 Programming Guide.

When a GPIO is assigned an output enable function it should be configured with gpio\_resync = 0x0 and gpio\_deglitch\_bypass = 0x1; this disables GPIO resynchronization and bypasses the GPIO deglitcher ensuring lowest latency. When so configured, the maximum time delay from the time the voltage level on a GPIO input changes state until the clock output is enabled or disabled is 13ns plus 4 periods of the output clock.

#### 3.11 Reference Monitors

The references can be continually monitored for loss of signal and for frequency offset per user programmed thresholds.

#### 3.12 SYSREF

The RC38208/RC38108 includes a SYSREF controller that can output SYSREF signals on any of OUT[10:1].

The SYSREF controller can be configured to generate a continuous stream of SYSREF pulses triggered by a signal on a level-sensitive GPIO, active high or active low. Continuous SYSREF generation can also be controlled by a register bit.

The SYSREF controller can be configured to generate a programmable number, from 1 to 255, of SYSREF pulses triggered by a signal on an edge-sensitive GPIO. The GPIO can be programmed to be rising or falling edge sensitive. A programmable number of SYSREF pulses can also be triggered by writing a register bit.

A single RC38208/RC38108 device can control several other connected RC38208/RC38108 devices so that they all generate simultaneous and aligned SYSREF signals. The controlling device can be triggered as described above.



#### 3.13 **Time Sync**

The RC38208/RC38108 includes a Time Sync block that enables external software to monitor and control phase and time alignment of the device with external signals and devices.

The time of day (TOD) and Synthesis block synthesizes a time clock with a frequency between 10MHz and 250MHz. The block includes a 60-bit addressable TOD accumulator that counts time clock pulses and generates sync pulses with a frequency between 0.5Hz and 8kHz. The phase of the time sync pulses can be controlled by external software without disturbing the time clock. Any one of the FODs can be used to control the frequency of time clock. The time clock and time sync signals are available on any of OUT[10:8].

A time-to-digital converter (TDC) is provided to make precision phase and time comparisons between external signals, between internal signals, or between internal and external signals with frequencies between one-timeevent and 33MHz. Internal signals available to the TDC are the time clock, time sync, and the DPLL feedback clocks. The precision of the TDC is better than 100ps.

#### 3.14 Status and Control

All control and status registers are accessed through a 1MHz I<sup>2</sup>C or 20MHz SPI Target microprocessor interface. The device can automatically load a configuration from internal one time programmable (OTP) memory. Alternatively, the I<sup>2</sup>C controller interface can automatically load a configuration from an external EEPROM after reset.

For more information about the device's registers, please contact Renesas Technical Support.

## 4. Applications Information

#### 4.1 Power Considerations


There are no power supply sequencing requirements when nMR is asserted (externally driven low); however, if nMR is left floating and if  $V_{DDOx}$  or  $V_{DD\_CLK}$  reach 90% of  $V_{DD}$  nominal after  $V_{DD\_DIG}$ , then a soft reset or a controller reset must be initiated to ensure the output dividers are synchronized.

For power and current consumption calculations, see the Renesas IC Toolbox (RICBox) software tool.

#### 4.2 Power-On Reset and Reset Controller

Upon power-up, an internal power-on reset (POR) signal is asserted 20ms after the  $V_{DDXO}$ ,  $V_{DD\_DCD}$ , and  $V_{DDD33\_DIG}$  supplies all reach 90% of  $V_{DD}$  nominal. The first controller reset sequence is initiated when POR is asserted and the voltage level on the nMR pin is high.

After the first controller reset sequence is initiated, another controller reset sequence can be initiated by taking the voltage level on the nMR pin low and then high while POR remains asserted (see Figure 7). To ensure a controller reset sequence is initiated, the voltage level on the nMR pin must be held low for at least 20ns before transitioning high. To ensure deterministic behavior, voltage level transitions on the nMR pin must be monotonic between minimum  $V_{IH}$  and maximum  $V_{II}$  (see Table 23).

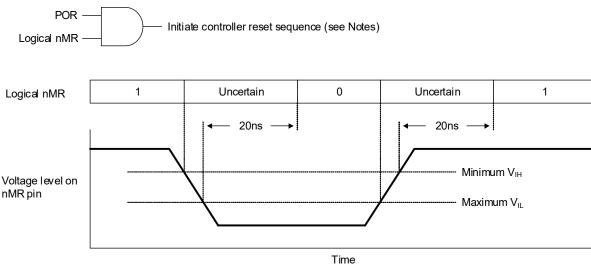

#### Notes

- Requires 1 from logical nMR for the first controller reset sequence
- Requires 0 to 1 transition from logical nMR after the first controller reset sequence has been initiated

Figure 7. Controller Reset Sequence Initiation

The nMR pin has an internal pull-up that can be left to float, or it can optionally be externally pulled high or low. If nMR is high when the internal POR is asserted, the reset controller will initiate a controller reset sequence. If nMR is low when the internal POR is asserted, the reset controller will not initiate a controller reset sequence until nMR is taken high.

During the controller reset sequence all clock outputs are initially disabled and will be enabled during the reset sequence at a point depending on the out\_startup bits. Disabled differential outputs will have OUTx = low and nOUTx = high. Disabled LVCMOS outputs with cmos\_same\_phase = 1 will have OUTx = low and nOUTx = low. Disabled LVCMOS outputs with cmos\_same\_phase = 0 will have OUTx = low and nOUTx = high.

The serial ports are accessible when the device\_ready\_sts register bit is set to 0x1. Any GPIO can be configured to indicate the state of the device\_ready\_sts register bit by setting the associated gpio\_func register field to 0x18. When a reset sequence completes, the rst\_done\_sts register bit is set to 0x1.

When a configuration is loaded from EEPROM, the voltage level on the nMR pin must be held high from the time a controller reset sequence is initiated until after the EEPROM transactions have completed, as indicated when the device ready sts bit is set to 1. Any GPIO can be configured to indicate the state of the device ready sts bit.

## 4.3 Recommendations for Unused Input and Output Pins

#### 4.3.1 CLKIN/nCLKIN Pins

Unused CLKIN/nCLKIN pins should be left to float. Renesas recommends that CLKIN/nCLKIN inputs that are connected but not used, should not be driven with active signals.

#### 4.3.2 LVCMOS Control Pins

LVCMOS control pins have internal pull-up resistors. Additional  $1k\Omega$  pull-up resistors can be added but are not required.

#### 4.3.3 LVCMOS Output Pins

Unused LVCMOS outputs must be left to float. Renesas recommends that no trace should be attached. Unused LVCMOS outputs should be configured to a high-impedance state to prevent noise generation.

#### 4.3.4 Differential Output Pins

Unused differential outputs must be left to float. Renesas recommends that no trace should be attached. Both sides of a differential output pair should be either left to float or terminated.

### 4.4 Overdriving the Crystal Interface

When overdriving the crystal interface, the XOUT pin is left to float and the XIN input is overdriven by an AC coupled LVCMOS driver, or by one side of an AC coupled differential driver. The XIN pin is internally biased to 0.6V. The voltage swing on XIN should be between 0.5V peak-to-peak and 1.2V peak-to-peak, and the slew rate should not be less than 0.6V/ns.

Figure 8 shows a 1.8V or 2.5V LVCMOS driver overdriving the XIN pin. For  $V_{DD}$  = 1.8V, considering the output impedance of the driver ( $R_O$ ), the values of the series resistance ( $R_S$ ) and  $R_1$  should be chosen so that the voltage swing on XIN will be below 1.2V peak-to-peak. For  $V_{DD}$  = 2.5V the sum of the output impedance of the driver ( $R_O$ ) and the series resistance ( $R_S$ ) can be made higher than  $R_1$  so that the voltage swing on XIN will be below 1.2V peak-to-peak.

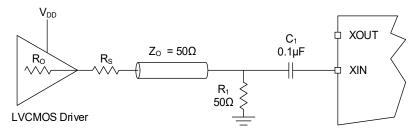


Figure 8. LVCMOS Driver to Crystal Input Interface

Figure 9 shows one side of an LVPECL driver overdriving the XIN pin.

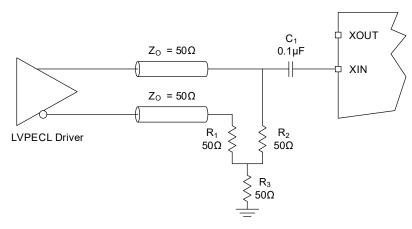


Figure 9. LVPECL Driver to Crystal Input Interface

#### 4.5 Differential Output Termination

The RC38208/RC38108 programmable differential clock outputs support LVDS, HCSL, and CML. Receivers that support LVDS, HCSL, or CML can be direct-coupled with RC38208/RC38108 outputs. Differential receiver types other than LVDS, HCSL, or CML can be AC-coupled.

The RC38208/RC38108 differential clock outputs support selectable internal termination resistors as shown in Figure 10. The value of resistors  $R_{O1}$ ,  $R_{O2}$ ,  $R_{O3}$ , and  $R_{O4}$  is  $50\Omega$ .




Figure 10. Internal Termination Resistors for Differential Drivers

Note: Some receivers are equipped with internal terminations that can include the following: trace termination, voltage biasing, and AC-coupling. Consult with the receiver specifications to determine if the termination components shown in this section are needed.

#### 4.5.1 Direct-Coupled HCSL Termination

For HCSL receivers, RC38208/RC38108 clock outputs should be configured for HCSL, and the devices should be direct-coupled. The RC38208/RC38108 supports several programmable HCSL voltage swing options.

Figure 11 shows an HCSL driver direct-coupled with an HCSL receiver and configured for internal source termination. The RC38208/RC38108 supports source termination, with an internal  $50\Omega$  resistors to ground at the transmitter. Resistor  $R_1$  is optional and is used to improve impedance matching. If  $R_1$  is used, it will reduce the amplitude at the receiver by 50%, this can be mitigated by adjusting the output amplitude of the driver.



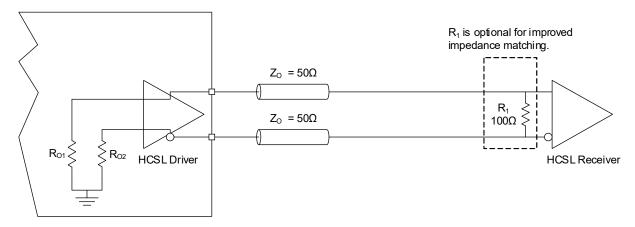


Figure 11. HCSL Source Termination Using Internal Termination

Figure 12 shows an HCSL driver direct-coupled with an HCSL receiver using end termination.

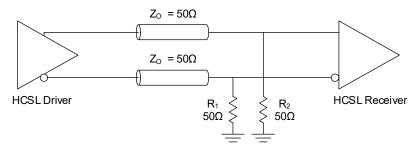


Figure 12. HCSL End Termination

#### 4.5.2 Direct-Coupled LVDS Termination

For LVDS receivers, RC38208/RC38108 clock outputs should be configured for LVDS, and should be direct-coupled. The RC38208/RC38108 supports several programmable LVDS voltage swing and common mode options.

Figure 13 shows an LVDS driver direct-coupled with an LVDS receiver. The recommended value for the termination resistor ( $R_1$ ) is between  $90\Omega$  and  $132\Omega$ . The actual value should be selected to match the differential impedance ( $Z_0$ ) of the transmission line. To avoid transmission-line reflection issues,  $R_1$  should be surfacemounted and placed as close to the receiver as practical.

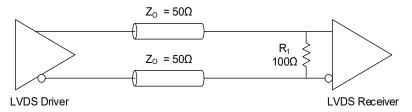


Figure 13. LVDS Termination

#### 4.5.3 Direct-Coupled CML Termination

For CML receivers, RC38208/RC38108 clock outputs should be configured for CML, and should be direct-coupled. The RC38208/RC38108 supports several programmable CML voltage swing options.

Figure 14 shows a CML driver direct-coupled with a CML receiver.

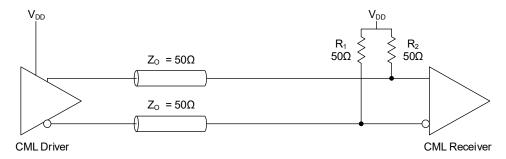


Figure 14. Direct-Coupled CML Termination

#### 4.5.4 AC-Coupled Differential Termination

For AC-coupled differential terminations, the RC38208/RC38108's clock outputs should be configured for HCSL and the HCSL driver should be configured with a voltage swing appropriate for the receiver. The RC38208/RC38108 supports several programmable HCSL voltage swing options.

Figure 15 shows an HCSL driver configured for internal termination and AC-coupled with a differential receiver with external termination resistors and biasing. Resistors  $R_1$ ,  $R_2$ ,  $R_3$ , and  $R_4$  should be selected to provide the appropriate bias voltage for the receiver. Consult receiver specifications for input swing and bias requirements. An optional resistor ( $R_5$ ) can be used to improve impedance matching. If  $R_5$  is used, it will reduce the amplitude at the receiver by 50%; this can be mitigated by adjusting the output amplitude of the driver.

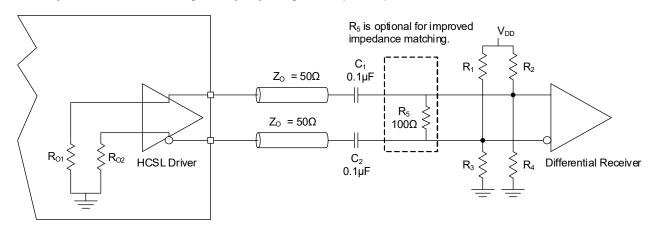


Figure 15. AC-Coupled Differential Termination

For more information on AC-coupling, see Renesas application note AN-953, Quick Guide - Output Terminations.

#### 4.5.5 AC-Coupled LVPECL (AC-LVPECL) Termination

AC-coupling should be used for LVPECL receivers.

For AC-coupled LVPECL (AC-LVPECL) terminations, the RC38208/RC38108 clock outputs should be configured for HCSL. The RC38208/RC38108 supports several programmable HCSL voltage swing options and it should be configured as appropriate for the receiver and termination scheme. Consult receiver specifications for input swing and bias requirements.

Figure 16 shows an HCSL driver configured for internal termination driving an AC-LVPECL receiver with internal termination resistors and biasing.

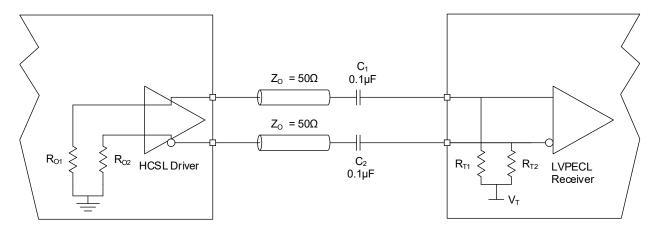


Figure 16. AC-LVPECL Termination for LVPECL Receiver with Internal Termination Resistors and Biasing

For more information on AC-coupling, see Renesas application note AN-953, Quick Guide - Output Terminations.

# 5. Package Outline Drawings

The package outline drawings are located at the end of this document and are accessible from the Renesas website. The package information is the most current data available and is subject to change without revision of this document.

# 6. Marking Diagram



RC38108A

- Lines 1 and 2: part number.
- Line 3:
  - "\$" indicates the mark code.
  - "YWW" indicates the last digit of the year and work week the part was assembled.
  - "#" indicates the last three characters of assembly lot.



RC38208A

- Lines 1 and 2: part number.
- Line 3:
  - · "\$" indicates the mark code.
  - "YWW" indicates the last digit of the year and work week the part was assembled.
  - "#" indicates the last three characters of assembly lot.


# 7. Ordering Information

**Table 29. Ordering Information** 

Part Number [1][2]	Package Description	Carrier Type	Temperature Range [3]
RC38108AyxxGBB#HC0	64-BGA, 7 × 7 mm	Таре	-40 to +105°C
RC38108AyxxGBB#BC0	64-BGA, 7 × 7 mm	Tray	-40 to +103 C
RC38208AyxxGBB#HC0	64-BGA, 7 × 7 mm	Таре	-40 to +105°C
RC38208AyxxGBB#BC0	64-BGA, 7 × 7 mm	Tray	-40 to +105 C

- 1. Replace "y" in the part number with "1" for VCO frequency range 9.8GHz to 10.35GHz, or "2" for VCO frequency range 9.25GHz to 9.85GHz.
- Replace "xx" in the part number with the desired pre-programmed configuration code provided by Renesas in response to a custom configuration request or use "00" for unprogrammed parts.
  - Note: An unprogrammed part supports four default configurations: config\_0 (SPI 4-wire), config\_1 (SPI 3-wire), config\_2 (I2C), and config\_3 (external EEPROM).
- 3. Temperature range refers to board temperature.

Table 30. Pin 1 Orientation in Tape and Reel Packaging

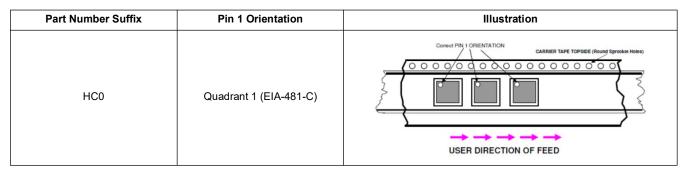

# 8. Revision History

Revision	Date	Description
1.12	Nov 17, 2025	<ul> <li>Clarified the use of nMR in power sequencing in Power Considerations</li> <li>Added a note to footnote 2 in Table 29</li> </ul>
1.11	Sep 2, 2025	<ul> <li>Updated Overdriving the Crystal Interface to indicate the slew rate should not be less than 0.6V/ns.; previously, it indicated 0.2V/ns</li> <li>Updated footnote 3 in Table 24</li> <li>Changed use of the terms "master/slave" to "controller/target"</li> </ul>
1.10	Aug 18, 2025	Updated footnote 2 in Table 20 and Table 21 to indicate "Single-ended measurement."
1.09	May 9, 2025	Updated Figure 2 and Figure 3  Updated Table 3: Changed V <sub>DDOx</sub> to V <sub>DDx</sub> Changed the maximum value of the fourth condition for V <sub>IN</sub>
1.08	Mar 25, 2025	Changed "device frequency reference" to "APLL frequency reference" in Table 12 and APLL Frequency Reference  Updated t <sub>R</sub> /t <sub>F</sub> in Table 20
1.07	Jan 7, 2025	Updated the footnotes in Table 19, Table 20, and Table 21
1.06	Dec 13, 2024	Updated Table 6 Updated Z <sub>OUTDC</sub> in Table 18 Updated the minimum value of V <sub>OVS</sub> in Table 20 Added Clock Output Enable Updated the temperature range in Table 29
1.05	Oct 29, 2024	Updated footnote 1 in Ordering Information
1.04	Oct 18, 2024	Added ECAD Design Information
1.03	Sep 26, 2024	<ul> <li>Updated the descriptions of pin numbers E3 and F3 in Table 1</li> <li>Updated footnote 2 in Table 19</li> <li>Updated footnote 3 in Table 23</li> <li>Completed other minor changes</li> </ul>
1.02	Aug 7, 2024	<ul> <li>Updated I<sub>DD_FODDIGBASE</sub> and I<sub>DD_PERFODDIG</sub> in Table 22.</li> <li>Updated the typical value of I<sub>DDOx</sub> for CML and output disabled in Table 22</li> </ul>
1.01	Jul 16, 2024	<ul> <li>Updated the Features list</li> <li>Updated the following tables: Table 14, Table 22, Table 23, Table 24, Table 26, Table 27, and Table 28</li> </ul>
1.00	Jun 28, 2024	Initial release.

# A. ECAD Design Information

This appendix supports the development of the PCB ECAD model for this device. It is intended to be used by PCB designers.

# A.1 Part Number Indexing

Orderable Part Number [1]	Number of Pins	Package Type	Package Code/POD Number	
RC38208A1xxGBB#HC0	64	BGA	BJG64	
RC38208A1xxGBB#KC0	64	BGA	BJG64	
RC38208A1xxGBB#BC0	64	BGA	BJG64	
RC38108A1xxGBB#HC0	64	BGA	BJG64	
RC38108A1xxGBB#KC0	64	BGA	BJG64	
RC38108A1xxGBB#BC0	64	BGA	BJG64	
RC38208A2xxGBB#HC0	64	BGA	BJG64	
RC38208A2xxGBB#KC0	64	BGA	BJG64	
RC38208A2xxGBB#BC0	64	BGA	BJG64	
RC38108A2xxGBB#HC0	64	BGA	BJG64	
RC38108A2xxGBB#KC0	64	BGA	BJG64	
RC38108A2xxGBB#BC0	64	BGA	BJG64	

<sup>1.</sup> Replace "xx" in the part number with the desired pre-programmed configuration code provided by Renesas in response to a custom configuration request or use "00" for unprogrammed parts.

## A.2 Symbol Pin Information

#### A.2.1 64-BGA

Pin Number	Primary Pin Name	Primary Electrical Type	Alternate Pin Name(s)
A1	VDD_VCO	Power	-
A2	GND	Power	-
A3	VDDO1	Power	-
A4	OUT1	Output	-
A5	OUT2	Output	-
A6	VDDO4	Power	-
A7	OUT4	Output	-
A8	OUT5	Output	-
B1	VDD_FAN	Power	-
B2	GND	Power	-
В3	VDDO2	Power	-
B4	nOUT1	Output	-
B5	nOUT2	Output	-
В6	VDDO5	Power	-
В7	nOUT4	Output	-
B8	nOUT5	Output	-
C1	GND	Power	-
C2	GND	Power	-
C3	GND	Power	-
C4	GND	Power	-
C5	GND	Power	-
C6	GND	Power	-
C7	GND	Power	-
C8	GND	Power	-
D1	VDDXO_DCD	Power	-
D2	GND	Power	-
D3	GND	Power	-
D4	nCS_A0	Input	-
D5	nMR	Input	-
D6	GND	Power	-

Pin Number	Primary Pin Name	Primary Electrical Type	Alternate Pin Name(s)
D7	VDDO6	Power	-
D8	VDD07	Power	-
E1	XIN	Input	-
E2	GND	Power	-
E3	VDD_DIG	Power	-
E4	CLKIN0	Input	-
E5	CLKIN2	Input	-
E6	GPIO1	I/O	-
E7	nOUT6	Output	-
E8	OUT6	Output	-
F1	XOUT	Output	-
F2	GND	Power	-
F3	VDD_CLK	Power	-
F4	nCLKIN0	Input	-
F5	nCLKIN2	Input	-
F6	GPIO0	I/O	-
F7	nOUT7	Output	-
F8	OUT7	Output	-
G1	GND	Power	-
G2	GND	Power	-
G3	SDO_A1	I/O	-
G4	SCL_SCLK	I/O	-
G5	SDA_SDIO	I/O	-
G6	VDD_FOD2	Power	-
G7	VDD_FOD0	Power	-
G8	VDD08	Power	-
H1	GND	Power	-
H2	GND	Power	-
H3	VDD_FOD1_REP	Power	-
H4	nOUT10	Output	-
H5	OUT10	Output	-
H6	VDDO10	Power	-
H7	nOUT8	Output	-
H8	OUT8	Output	-

# A.3 Symbol Parameters

Orderable Part Number [1]	Qualification	Mounting Type	Min Operating Temperature	Max Operating Temperature	Min Input Voltage	Max Input Voltage	RoHS	Output Type	DPLL Channels	Interface	Max Output Frequency	Phase Jitter	XTAL Frequency
RC38208A1xxGBB#HC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	2	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38208A1xxGBB#KC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	2	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38208A1xxGBB#BC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	2	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38108A1xxGBB#HC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	1	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38108A1xxGBB#KC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	1	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38108A1xxGBB#BC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	1	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38208A2xxGBB#HC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	2	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38208A2xxGBB#KC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	2	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38208A2xxGBB#BC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	2	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38108A2xxGBB#HC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	1	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38108A2xxGBB#KC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	1	I2C,SPI	2500 MHz	25 fs	80 MHz
RC38108A2xxGBB#BC0	Industrial	SMD	-40 °C	85 °C	1.71 V	1.89 V	Yes	LVCMOS,LVDS,HCSL,CML	1	I2C,SPI	2500 MHz	25 fs	80 MHz

<sup>1.</sup> Replace "xx" in the part number with the desired pre-programmed configuration code provided by Renesas in response to a custom configuration request or use "00" for unprogrammed parts.

# A.4 Footprint Design Information

## A.4.1 64-BGA

IPC Footprint Type	Package Code/ POD Number	Number of Pins		
BGA	BJG64	64		

Description	Dimension	Value (mm)	Diagram
Minimum body span (vertical side)	Dmin	6.9	
Maximum body span (vertical side)	Dmax	7.1	
Average length of grid (vertical side)	D1ave	5.6	
Minimum body span (horizontal side)	Emin	6.9	A1min
Maximum body span (horizontal side)	Emax	7.1	
Average length of grid (horizontal side)	E1ave	5.6	]
Minimum Standoff Height	A1min	0.30	
Maximum Height	Amax	1.19	]             <sub>/ A</sub>
Average ball diameter	Bnom	0.469	
Distance between the center of any two adjacent balls (vertical side)	PitchD	0.8	Amax -
Distance between the center of any two adjacent balls (horizontal side)	PitchE	0.8	
P = Plain Grid, S = Staggered Grid	GridType	Р	,
F = Full Matrix, P = Perimeter, SD = Selectively Depopulated, TE = Thermally Enhanced	MatrixType	F	1 2 3 4 5 6 7 8
Number of balls (vertical side)	Rows	8	A 00000000
Number of balls (horizontal side)	Columns	8	B O O O O O O O PitchD
Maximum number of ball positions (Rows x Columns)	Nmax	64	
Number of actual balls present	PinCount	64	E 0000000
Ball positions removed from matrix. Example: C5-H10, B6-B9, A1	DepopulateBalls	-	
Ball positions added back into depopulated matrix. Example: C8, D6-F9	RepopulateBalls	-	B RishE

Recommended Land Pattern (NSMD Design)							
Description	Dimension	Value (mm)	Diagram				
Diameter of pad. If specified this overrides the calculated value. This can be used to specify a manufacturer's recommended pad size.	х	0.365	A1 Ball Area				
Solder Mask Expansion	S	0.05	R.A&B 000000000000000000000000000000000000				