


REALITY AI LOAD DETECTION

Application Example for Sensorless Three-Phase Motor Control

Does your sensorless three-phase BLDC or PMSM motor control solution know the load during startup sequence? Renesas brings awareness to those system to identify the load within the startup time, sets startup current for better performance and reduces the stress within while keeping the same hardware configuration.

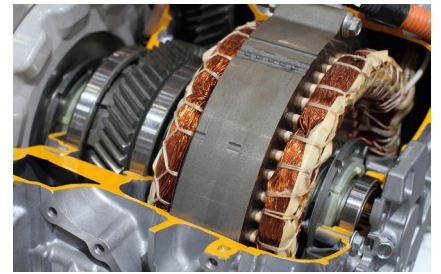


Features and Benefits

- Fully sensorless and enhanced solution
 - [RealityCheck™ Motor](#) enables estimation of the load during the beginning of the motor startup sequence to generate an AI classification model
 - Provides flawless integrated workflow using the [e2 studio IDE](#) and [Reality AI Tools®](#)
- Optimized footprint with 12.5KB Flash and 6.5KB RAM
- Identifies various possible load levels applied to motor shaft
- Enables BOM cost optimization and increased system power efficiency
- Ready-to-use demonstration package available on [MCK-RA6T2](#)

Project Workflow

Application example works in three steps.

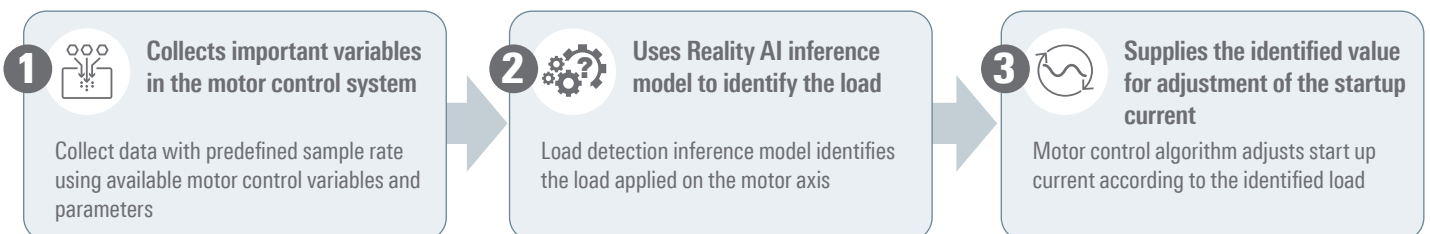

Target Applications



e-bike



Washing Machine



Delivery Robots



Blender

- For more information visit renesas.com/realityai-tools
- [Request a demo](#) to see load detection in operation