

Digital Green-Mode Synchronous Rectifier

1 Description

The iW873 is a high performance synchronous rectifier controller with integrated MOSFET and driver for flyback converters operating at discontinuous conduction mode. It emulates the diode rectifier at the secondary side of the flyback to reduce conduction loss. The iW873 determines the timing of the driver by sensing the voltage across the $R_{DS(ON)}$ of the built-in MOSFET to achieve lossless sensing. Proprietary digital adaptive turn-off control technology is used to minimize the turn-off deadtime of the synchronous rectifier so that the parallel Schottky diode required by conventional synchronous rectifiers can be eliminated. The integrated driver has strong driving capability for high efficiency. The operating power consumption of the controller excluding the driver is less than 4mW at no load to achieve the ultra-low no-load power consumption for 5V applications. The iW873 integrates a pulse linear regulator to maintain the operation of the synchronous rectifier at low system output voltage when the system is operating in constant current (CC) mode.

2 Features

- Integrated 60V power MOSFET
- Digital adaptive turn-off control minimizes dead-time and eliminates the parallel Schottky diode
- Integrated pulse linear regulator (PLR) allows SR operation at low system output voltage down to 2.4V in typical 5V, 2A USB charger applications with iW873-00
- Wide V_{IN} pin operating voltage up to 25V
- Intelligent low power management achieves ultra-low no-load operating current
- Lossless MOSFET V_{DS} sensing for SR timing control
- 8-pin SOIC package

3 Applications

- Compact AC/DC adapters/chargers for media tablets and smart phones

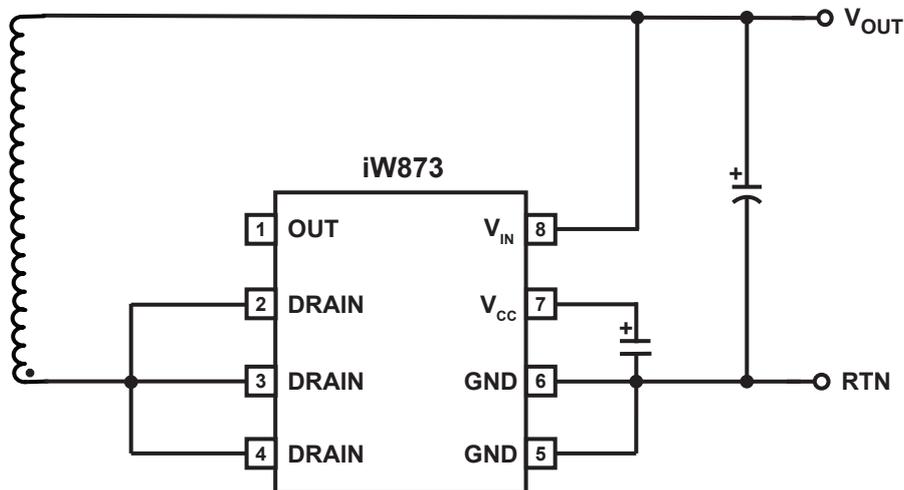


Figure 3.1 : iW873 Typical Application Circuit

Digital Green-Mode Synchronous Rectifier

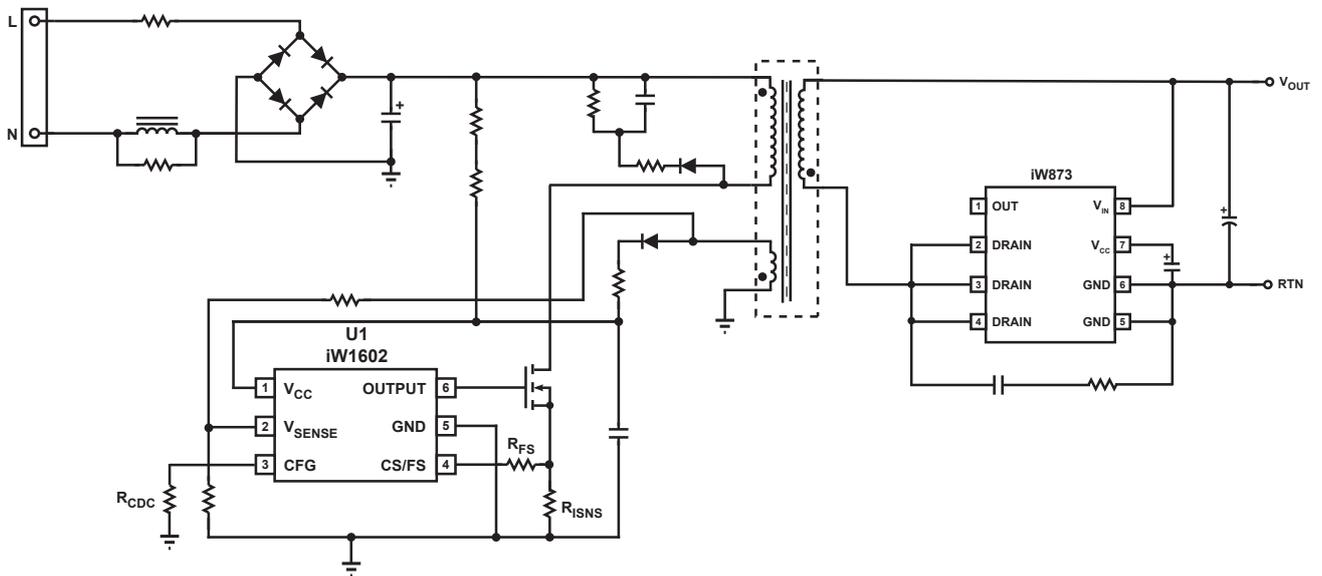


Figure 3.2 : iW873-00 Typical Application Circuit (Using iW1602 as Primary-Side Controller)
 (Achieving <75mW No-Load Power Consumption in 5V, 2A Adapter Designs with Fast Dynamic Load Response, and Supporting Constant Current Operation down to 2.4V System Output)

Digital Green-Mode Synchronous Rectifier

4 Pinout Description




Figure 4.1 : 8-Lead SOIC Package

Pin No.	Pin Name	Type	Pin Description
1	OUT	Power Output	Synchronous rectifier MOSFET driver output and the gate of the integrated MOSFET. Leave this pin open if not used.
2	DRAIN	Power Input	Synchronous rectifier MOSFET Drain.
3	DRAIN	Power Input	Synchronous rectifier MOSFET Drain.
4	DRAIN	Power Input	Synchronous rectifier MOSFET Drain.
5	GND	Ground	Synchronous rectifier MOSFET source and controller ground.
6	GND	Ground	Synchronous rectifier MOSFET source and controller ground.
7	V _{CC}	Power Input	IC power supply and output of LDO and PLR output. Connect this pin to a capacitor.
8	V _{IN}	Analog Input	Input of the internal LDO and system output voltage sensing circuit. Connects to adapter/charger output for bias voltage. The internal LDO clamps the V _{CC} voltage at 5V. It is also the input for the comparator to enable PLR and the comparator to enable SR operation.

Digital Green-Mode Synchronous Rectifier

5 Absolute Maximum Ratings


Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.

Parameter	Symbol	Value	Units
V_{IN} DC supply voltage range (pin 8, $I_{CC} = 15\text{mA}$ max)	V_{IN}	-0.3 to 33	V
Continuous DC supply current at V_{IN} pin ($V_{IN} = 30\text{V}$)	I_{VO}	15	mA
Continuous DC supply current at V_{CC} pin ($V_{CC} = 5.5\text{V}$)	I_{VCC}	15	mA
DRAIN pin voltage	V_D	-1.5 to 60	V
V_{CC} pin voltage	V_{CC}	-0.6 to 6	V
Junction temperature	T_J	-40 to 150	°C
Storage temperature		-65 to 150	°C
Thermal Resistance Junction-to-Ambient (SOIC-8 package)	θ_{JA_SO8}	TBD	°C/W
ESD rating per JEDEC JESD22-A114		2,000	V

Digital Green-Mode Synchronous Rectifier

6 Physical Dimensions

8-Lead Small Outline (SOIC) Package

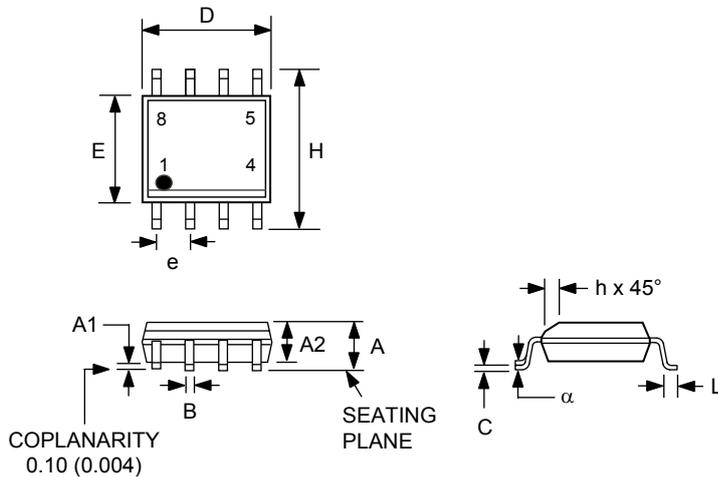

Symbol	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	—	0.069	—	1.75
A1	0.0040	0.0098	0.10	0.25
A2	0.0520	0.0600	1.32	1.50
B	0.0123	0.0200	0.31	0.51
C	0.0075	0.0098	0.19	0.25
D	0.189	0.197	4.80	5.00
E	0.1495	0.1575	3.80	4.00
e	0.050 BSC		1.27 BSC	
H	0.2284	0.2440	5.80	6.20
h	0.0098 BSC		0.25 BSC	
L	0.0158	0.050	0.4	1.27
α	0°	8°	0°	8°

Compliant to JEDEC Standard MS12F

Controlling dimensions are in inches; millimeter dimensions are for reference only

This product is RoHS compliant and Halide free.

Soldering Temperature Resistance:

[a] Package is IPC/JEDEC Std 020D moisture sensitivity level 1

[b] Package exceeds JEDEC Std No. 22-A111 for solder immersion resistance; package can withstand 10 s immersion < 260°C

Dimension D does not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15 mm per end. Dimension E1 does not include interlead flash or protrusion. Interlead flash or protrusion shall not exceed 0.25 mm per side.

The package top may be smaller than the package bottom. Dimensions D and E1 are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs and interlead flash, but including any mismatch between the top and bottom of the plastic body.

7 Ordering Information

Part no.	Options	Package	Description
iW873-00	Support CC operation down to 2.4V	SOIC, 8 pin	Tape & Reel ¹

Note 1: Tape and reel packing quantity is 2,500/reel. Minimum ordering quantity is 2,500.

Digital Green-Mode Synchronous Rectifier

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

© 2022 Renesas Electronics Corporation. All rights reserved.

RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.