

Introduction

Intersil recently introduced the ISL12022MA Real Time Clock (RTC) device. The device is software compatible to the ISL12022M. The ISL12022MA features enhanced immunity to ESD per the IEC61000-4-2 standard, and also provides improved resistance to system leakage related to environmental moisture.

This Technical Brief provides information on the enhancements made on the ISL12022MA versus the ISL12022M.

Product Enhancements to Support Applications Requiring Performance to IEC61000-4-2 ESD Specifications

The IEC61000-4-2 is purely a systems-level test specification, and is not intended to document the performance of individual components. However, those designs which are unable to provide ESD shielding for sensitive ICs in their systems are performing testing in the same manner as IEC61000-4-2 testing at the board/component level, to ensure that their systems will pass the product qualification testing required in their market.

Since the ISL12022M does not have physical contact outside the system, ESD discharges will not damage the device directly. But the ESD event will emit an electromagnetic interference (EMI) that can interrupt the sensitive ISL12022M crystal resonator circuit.

Testing to IEC61000-4-2 is done using the Contact Discharge method. During the ESD testing, the ESD gun's discharge tip has physical contact with the coupling plane and is placed within 3cm of the ISL12022M. Up to 10,000 ESD discharges are performed to check for any possible impact to the operation of the device. The original ISL12022M meets the 3kV Human Body Model (HBM) and 300V Machine Model (MM) ESD requirements of the test, but does not meet the 8kV minimum requirement of the Level 4 Contact Discharge (CD) test.

After technical analysis, a minor redesign of the lead frame to address antenna effects was implemented. Testing has demonstrated successful operation under the Contact Discharge test with ESD levels in excess of 12kV. Operating in the recommended layout, a circuit using the ISL12022MA has demonstrated that the device meets the requirements of the IEC standard.

Product Enhancements Providing Reduced Sensitivity to High Environmental Moisture

Due to very low operating current levels, oscillators utilizing common 32kHz crystals are known to be very sensitive to leakage currents, which can cause the oscillator frequency to suffer high drift, or cease operation. Flux is an important component of the

soldering process which acts as a wetting agent, and also prevents oxidation. The application of excessive flux or incomplete activation will result in a residue which is known to be hydrophobic (moisture-absorbing), and conductive. It can cause intermittent conduction or complete failure in a circuit.

The residue, although clear and seemingly harmless after assembly, can after a few days to a few months (depending on the surrounding environment) absorb enough moisture to form a white layer of conductive dendrites on components, and the circuit board itself. Recommended practice from all flux manufactures is to properly clean the flux residue from the board after assembly using established equipment and methods. Also, in applications requiring environmental qualifications in the presence of high humidity a conformal coating is usually applied to the board to achieve optimal reliability. However, proper cleaning procedures are not always observed, and the additional cost and handling process of a conformal coating is not always considered worthwhile.

After receiving feedback from customers regarding functional issues related to flux residue, the design of the ISL12022M module package was evaluated with consideration given to leakage currents. Additional improvements were implemented to minimize the impact of this issue on the operation of the device. Bench evaluation and testing demonstrates that the upgraded ISL12022MA operates dependably in the presence of highly elevated moisture levels. Very large amounts of accumulated flux residue can still cause functional issues, however, users will find that manufacturing flows following the most basic cleaning procedures, followed by the application of a conformal coat for extra protection, will result in dependable operation.

In order to take maximum advantage of the enhancements discussed above, users can follow the grounding layout shown in Figure 2. Note that this enhancement incurs no functional change to the operation of the device but only provides improved ESD performance under requirements of IEC61000-4-2, and greater reliability and reduced sensitivity to board leakage in applications requiring operation in environments involving condensing moisture. There is no need for users satisfied with the operation of the ISL12022M to switch to the ISL12022MA, unless they wish to take advantage of these enhancements.

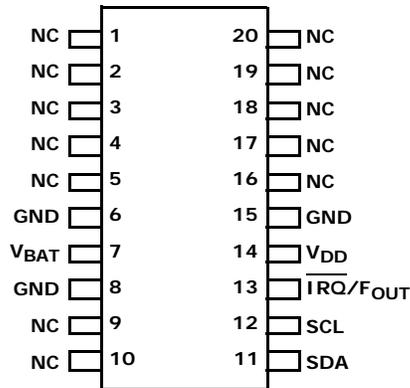


FIGURE 1. ISL12022M PINOUT

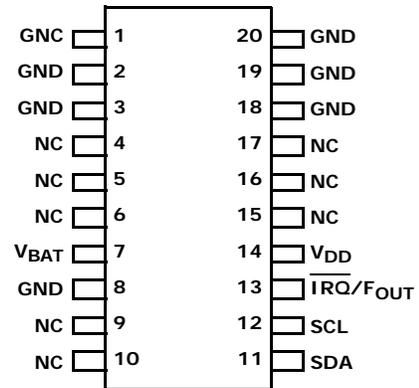


FIGURE 2. ISL12022MA PINOUT

Conclusion

Proper grounding and shielding techniques are always recommended to protect sensitive Integrated Circuits from ESD discharge. Also, users can avoid functional issues in sensitive low-power oscillator circuitry due to high environmental humidity levels by observing proper flux cleaning/removal procedures, to avoid conductive dendrites build-up, and, if possible, the application of conformal coating to achieve optimal dependability in high-humidity applications. In many cases, this ideal situation is not easily achieved. Intersil has enhanced the popular ISL12022M 3-in-1 RTC Module to create the ISL12022MA, which provides extra performance for users needing to meet the requirements of the IEC61000-4-2 ESD Standard, and also to minimize flux residue/moisture-related operational issues.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338