

DA14585 Reference Design

Design Name	DA14585_RD_RCU
Ref. Number	321-08-B1
Version	B01
Date	May. 22 2017
Designer	KR


History Table		
Version	Date	Comments
A00	Nov. 07 2016	Initial Schematic
B00	March. 16 2017	1. Mic2 and peripheral parts removed 2. IR led changed to through part 3. R127 removed, R23 changed to 33 ohm. 4. R218 changed to No Populated. R243 0 ohm added (urx to gnd) 5. Circuit on VBAT3V to solve the start up issue. 6. Changed supply for Buzzer, IR from VBAT3V to VBAT.
B01	May. 23 2017	1. UART/JTAG: R217, R218: changed to 1Kohm.R243: np 2. Circuit on VBAT3V to solve the start up issue: changed to No Populated

Configuration note

NOTE box

Changes in
this
Version.

Text in BOLD
To be transfered on PCB

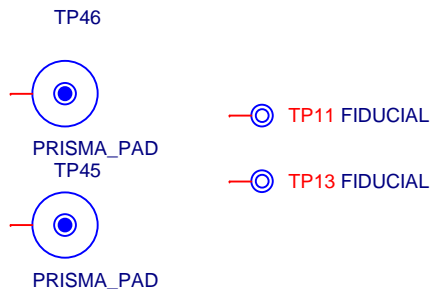

Label_Dialog_L6008

<Core Design>



Dialog Semiconductor
N.E.O. Athinon- Patron 15
26441, Patra, Greece
tel. (+30) 2610390940
fax. (+30) 2610390941

Title : DA14585_RD_RCU_vB1			
Doc. Nr.	Designer: kR	Rev:B	
Date: Tuesday, May 23, 2017	Sheet: 0	of	2

