

ISL75054MDEMO1Z

Radiation Tolerant ISL75054M Ultra Low Noise LDO Board

Description

The ISL75054MDEMO1Z demonstration board features the ISL75054M LDO. This IC is an ultra-low noise, high PSRR, radiation tolerant low dropout regulator ideal for powering RF devices and ADCs.

The ISL75054M has an operational supply voltage range from 2.7V to 30V, an output range of 0.5V to $V_{IN}-V_{DO}$, and an output capability of up to 1A of current.

The ISL75054M features adjustable soft-start control, an open-drain power-good indicator, and overvoltage and undervoltage detection for power-good.

Built-in protections include $V_{IN} - V_{OUT}$ foldback current limiting, externally programmable current limit, and over-temperature protection.

The integration of a precision internal current source and a high-performance voltage buffer error amplifier results in ultra-low noise and high PSRR while reducing the number of external components required for designs using the ISL75054M. This minimizes the overall solution size, reduces the BOM, and simplifies the design.

The ISL75054MDEMO1Z demonstration board provides a quick and easy method for evaluating the ISL75054M part in a form factor optimized for minimum solution size.. For more information about the device operation, function, and performance, refer to the *ISL75054M Datasheet*.

Features

- Form factor optimized for minimum solution size
- Ultra-low noise
- High PSRR
- Adjustable enable, power-good, and current limit thresholds
- Output current monitoring through the OCP pin
- Adjustable startup timing and fast-start capability

Specifications

- Input voltage supply (V_{IN}): 3.3V + V_{DO} to 20V
- Preset output voltage (V_{OUT}): 3.3V
- Maximum output current: 1A
- PCB Layers/Thickness: 4 layers, 1oz outer, 0.5oz inner

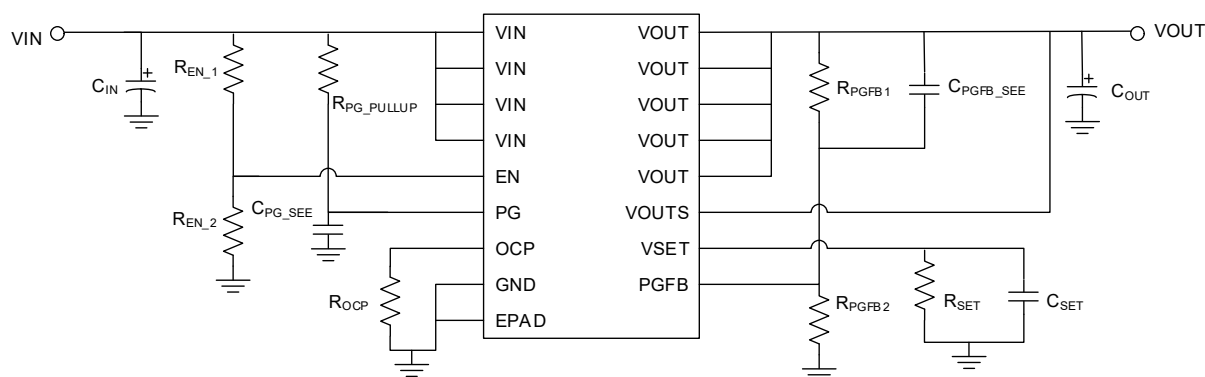


Figure 1. Board Block Diagram

Contents

- 1. Functional Description 3
 - 1.1 Operational Characteristics 3
 - 1.2 Quick Start Guide 3
 - 1.3 VOUT Setting 3
 - 1.4 Soft-Start Setting 3
 - 1.5 Resistor Adjustable OCP 3
- 2. Board Design 4
 - 2.1 Schematic Diagrams 5
 - 2.2 Bill of Materials 5
 - 2.3 Board Layout 6
- 3. Typical Performance Graphs 7
- 4. Ordering Information 8
- 5. Revision History 8

1. Functional Description

The ISL75054MDEMO1Z demonstration board is configured for an output voltage of 3.3V and is capable of an input voltage of 3.3V + V_{DO} to 20V.

The ISL75054MDEMO1Z demonstration board provides access to the pins of the IC device and test connectors for test equipment. See the schematic, PCB layers, and Bill of Materials for more information.

1.1 Operational Characteristics

The ISL75054MDEMO1Z requires only a single voltage supply of 3.3V + V_{DO} to 20V connected to VIN to operate, outputting 3.3V on VOUT. This board is rated for 1A of output current. The input operating voltage at which the IC turns on is set by the resistor divider (R2 and R3) on the EN pin and the VIN UVLO Threshold of 2.7V.

The ISL75054MDEMO1Z can handle input voltages of up to 20V; however, to avoid foldback and over-temperature protection, Renesas recommends that the power dissipation be less than 2W.

1.2 Quick Start Guide

- Apply input source to VIN and VIN_GND terminals.
- A resistive or electronic load can be connected to VOUT and VOUT_GND terminals.

1.3 VOUT Setting

The ISL75054MDEMO1Z is configured for a 3.3V output voltage by a 33.2kΩ R_{SET} resistor (R7) from VSET to GND. A resistor divider from VOUT to PGFB (R5 and R6) sets the fast startup and power-good thresholds.

Use [Equation 1](#) to calculate the R_{SET} resistor required for a specific output voltage.

$$(EQ. 1) \quad R_{SET}(\Omega) = \frac{V_{OUT}(V)}{100\mu A}$$

Use [Equation 2](#) to calculate the recommended resistor divider from VOUT to PGFB to enable fast startup and power-good functionality if a different output voltage is configured. A 665mV PGFB threshold is chosen as the midpoint between the 605mV fast start shutoff and 725mV overvoltage typical thresholds.

$$(EQ. 2) \quad 665mV = \frac{V_{OUT}(V) \times R_{PGFB1}(k\Omega)}{R_{PGFB1}(k\Omega) + R_{PGFB2}(k\Omega)}$$

1.4 Soft-Start Setting

The ISL75054M soft start is set by placing a C_{SET} capacitor (C5) from the VSET pin to GND. In addition to configuring the startup time, this capacitor creates a noise filter for the internal current reference. In general, a lower capacitor results in a faster soft-start time but higher noise. Renesas recommends using a C_{SET} capacitor between 0.47μF and 10μF.

1.5 Resistor Adjustable OCP

The ISL75054M features both VIN - VOUT foldback current limiting and externally programmable current limit. The resistor adjustable overcurrent limit is set by an R_{OCP} resistor (R4) from the OCP pin to GND and can be calculated by [Equation 3](#).

$$(EQ. 3) \quad R_{OCP} = \frac{150A \times \Omega}{I_{OUT(Limit)}}$$

With R_{OCP} of 150Ω, the maximum output current is limited to 1A (typical). With R_{OCP} of 750Ω, the maximum output current is limited to 200mA (typical). When OCP is connected directly to GND, only internal overcurrent

protection is functional. The default R_{OCP} resistor on the DEMO board is 0Ω , therefore setting the current limit to a typical value of 1.4A.

2. Board Design

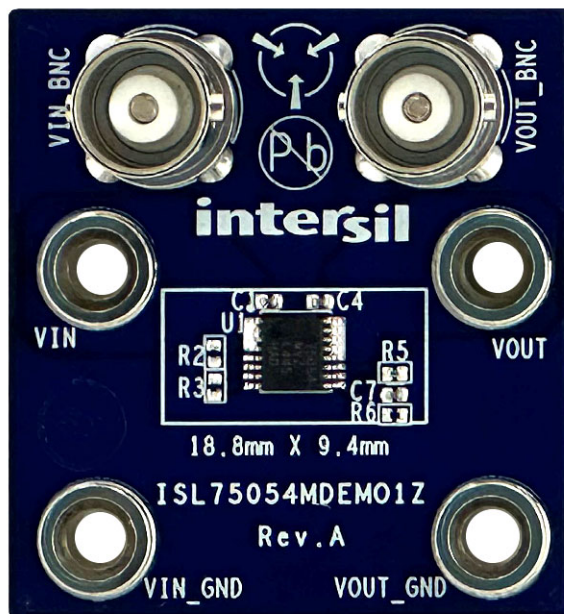


Figure 2. ISL75054MDEMO1Z Evaluation Board (Top)

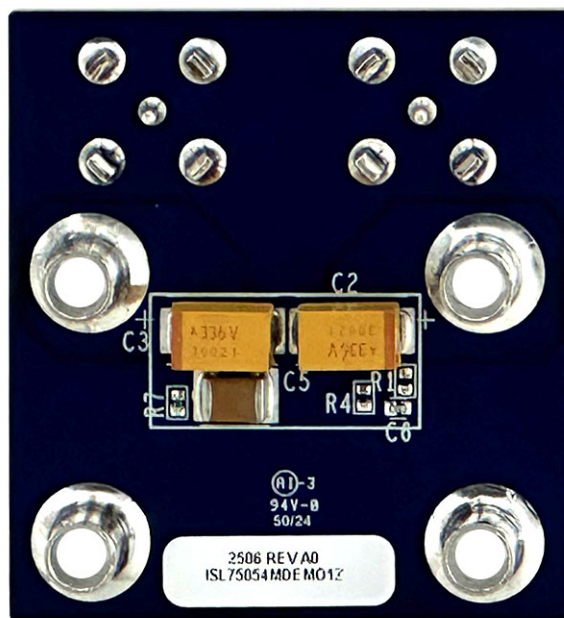


Figure 3. ISL75054MDEMO1Z Evaluation Board (Bottom)

2.1 Schematic Diagrams

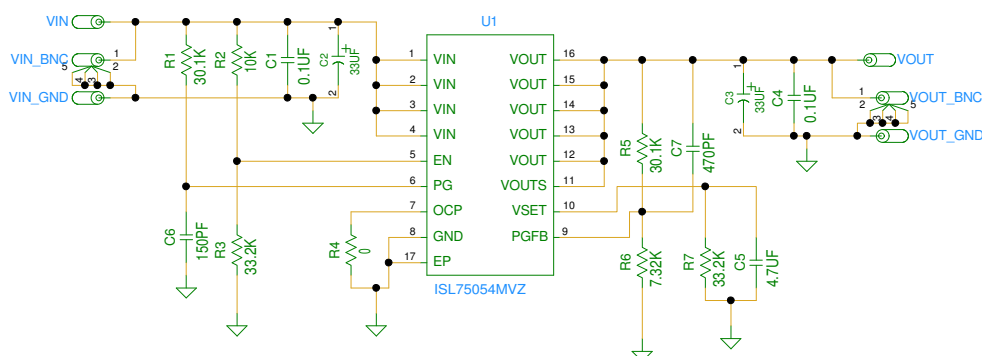


Figure 4. ISL75054MDEMO1Z Schematic

2.2 Bill of Materials

Qty	Ref Des	Description	Manufacturer	Part Number
2	VIN_BNC, VOUT_BNC	Silver Plated 50Ω PCB MOUNT RECEPTACLE	Amphenol	31-5329-51RFX
4	VIN, VIN_GND, VOUT, VOUT_GND	L = 0.350in SOLDER MOUNT BANANA PLUG	Keystone	575-8
1	C5	4.7μF, 10%, 50V, CAP_1812, Ceramic Chip Cap	Kemet	C1812C475K5RACAUTO
1	R1	30.1K, 1%, 1/16W, RES_0402, Thick Film Chip Resistor	Vishay	CRCW040230K1FKED
1	R6	7.32K, 1%, 1/16W, RES_0402, Thick Film Chip Resistor	Panasonic	ERA-2AEB7321X
2	C1, C4	0.1μF, 10%, 25V, CAP_0402, Ceramic Chip Cap	Murata	GRM155R71E104KE14J
1	C6	150PF, 10%, 50V, CAP_0402, Multilayer Cap	Various	Generic
1	C7	470PF, 10%, 50V, CAP_0402, Multilayer Cap	Various	Generic
1	R4	0, 1/16W, RES_0402, Thick Film Chip Resistor	Various	Generic
1	R2	10K, 1%, 1/16W, RES_0402, Thick Film Chip Resistor	Various	Generic
2	R3, R7	33.2K, 1%, 1/16W, RES_0402, Thick Film Chip Resistor	Various	Generic
1	U1	RT Ultra Low Noise LDO	Renesas	ISL75054MVZ
1	R5	30.1K, 1%, 1/16W, RES_0402, Thick Film Chip Resistor	Vishay	TNPW040230K1BEED
2	C2, C3	ESR 65mΩ 2006mA Commercial Multi-anode High Power Tantalum Capacitor	Kyocera AVX	TPME336K035R0065

2.3 Board Layout

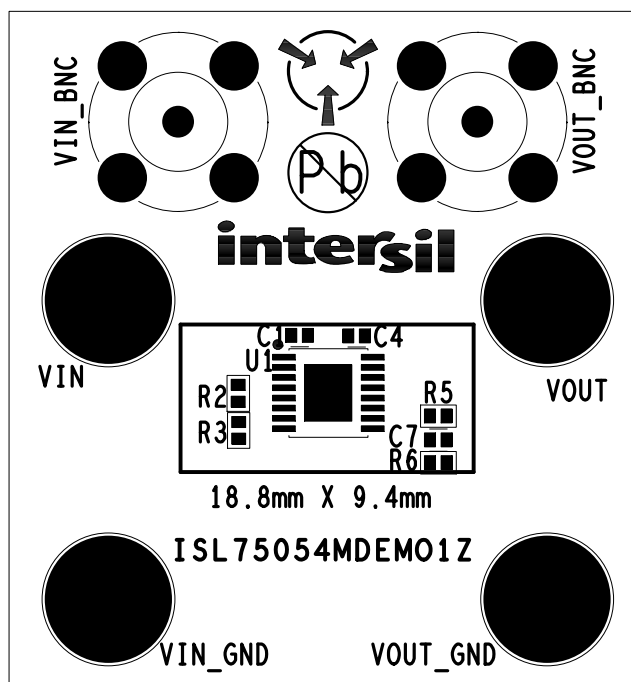


Figure 5. Silkscreen Top

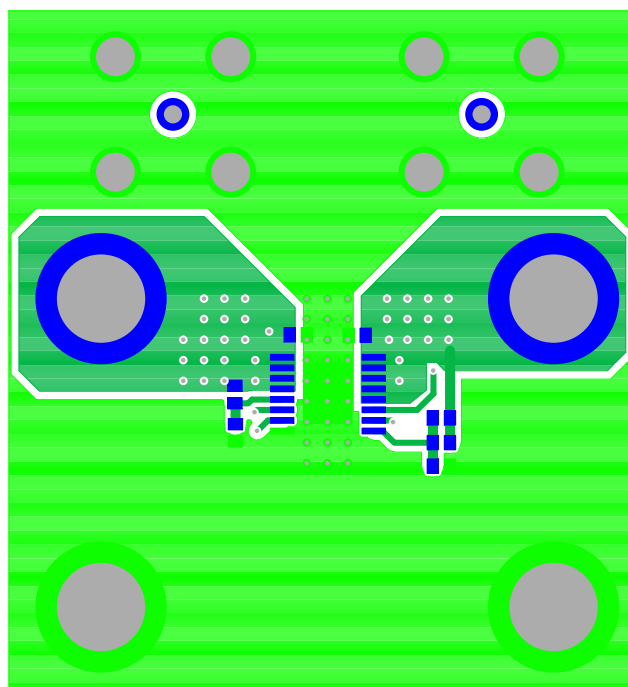


Figure 6. Top Layer

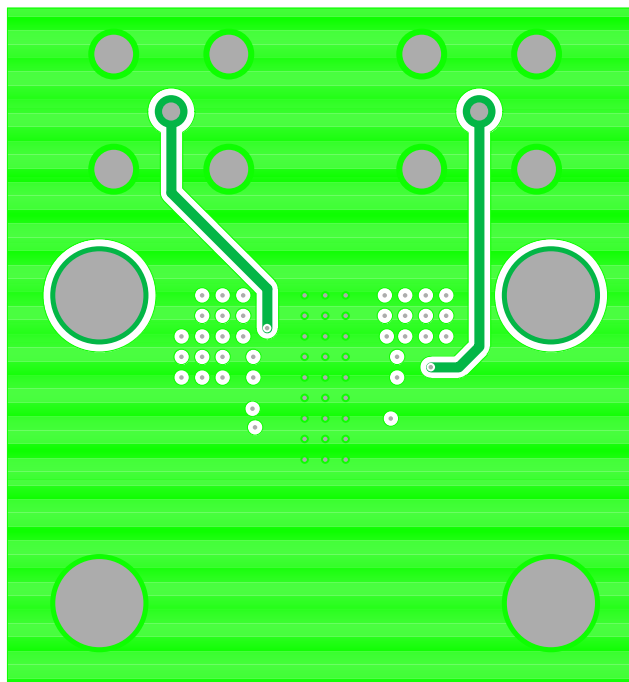


Figure 7. Layer 2

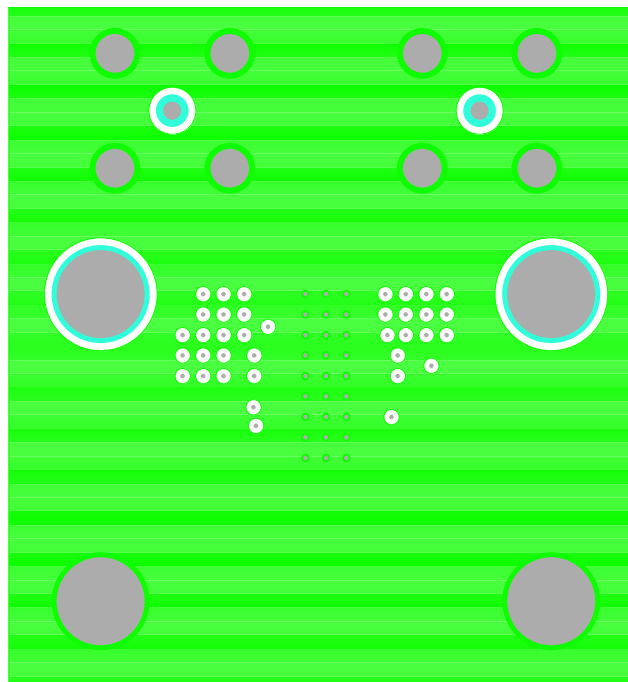


Figure 8. Layer 3

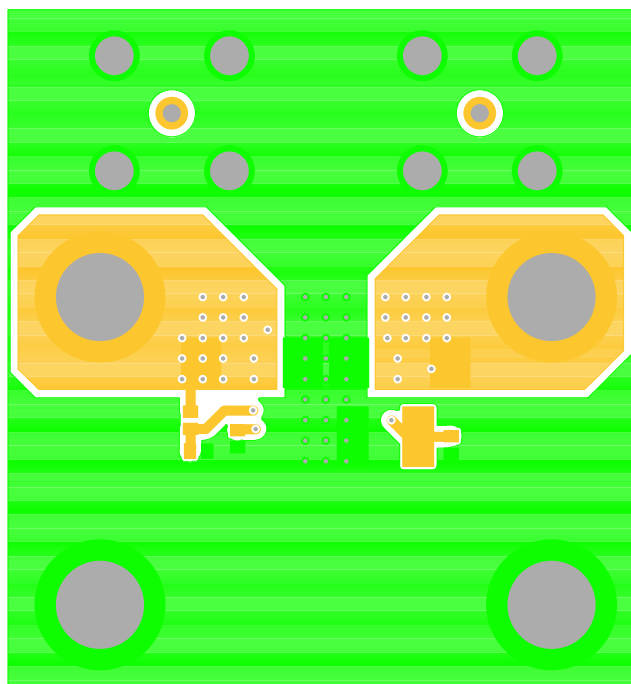


Figure 9. Bottom Layer

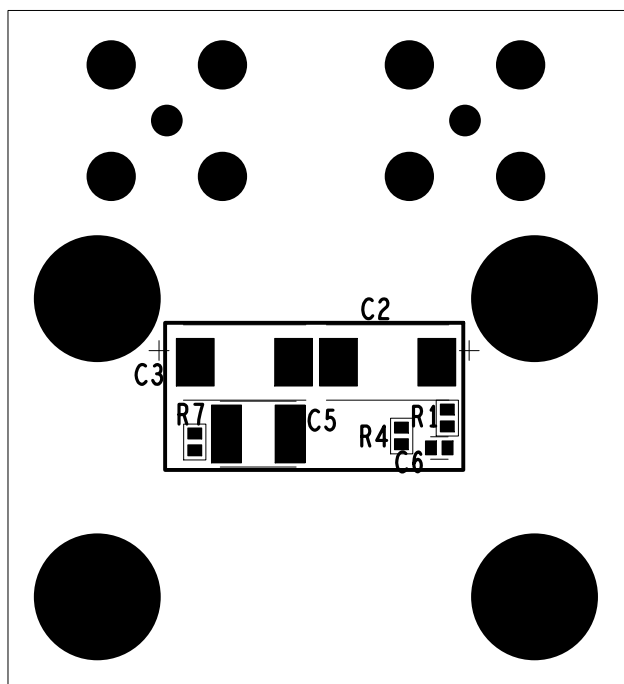


Figure 10. Silkscreen Bottom

3. Typical Performance Graphs

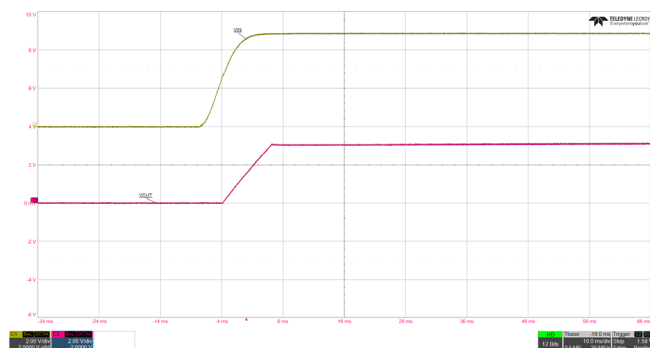


Figure 11. Startup: 1A Load

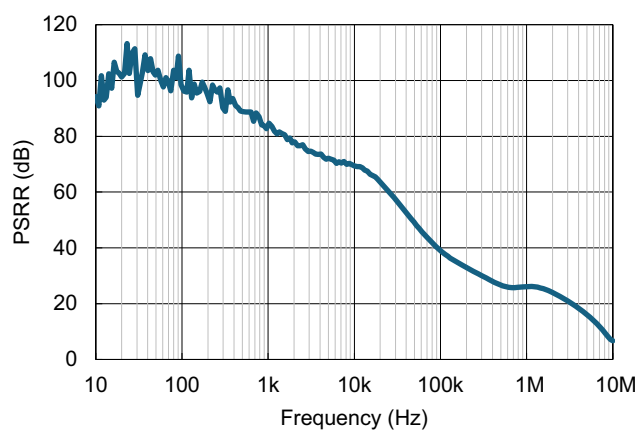


Figure 12. PSRR vs Frequency, 1A Load

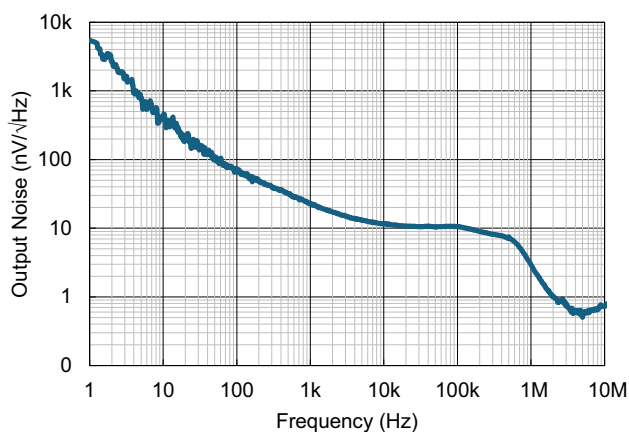


Figure 13. Noise vs Frequency

4. Ordering Information

Part Number	Description
ISL75054MDEMO1Z	Radiation Tolerant ISL75054M Ultra Low Noise LDO Board

5. Revision History

Revision	Date	Description
1.00	Apr 15, 2025	Initial release.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.