Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: http://www.renesas.com

April 1st, 2010 Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to http://www.renesas.com/inquiry.



Notice

- 1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights
 of third parties by or arising from the use of Renesas Electronics products or technical information described in this document.
 No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights
 of Renesas Electronics or others.
- 3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- 4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- 5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- 6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - "Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- 8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



HD151TS304ARP

Spread Spectrum Clock for EMI Solution

REJ03D0020-0400Z (Previous ADE-205-691C(Z)) Rev.4.00 May.19.2003

Description

The HD151TS304A is a high-performance Spread Spectrum Clock modulator. It is suitable for low EMI solution.

Features

- Supports 10 MHz to 60 MHz operation. (Designed for XIN = 24 MHz and 48 MHz)
- 1 copy of clock out with spread spectrum modulation @3.3 V
- 1 copy of reference clock @3.3 V
- Programmable spread spectrum modulation (±0.25%, ±0.5%, ±1.5% central spread modulation and spread spectrum disable mode.)
- SOP-8pin
- Pin to pin compatible with HD151TS304RP


Key Specifications

- Supply voltages : $VDD = 3.3 V \pm 0.165 V$
- Ta = 0 to 70° C operating range
- Clock output duty cycle = 50±5%
- Cycle to cycle jitter = ± 250 ps typ.
- Output slew rate = 0.8V/ns min.
- Ordering Information


Part Name	Package Type	Package Code	Package Abbreviation	Taping Abbreviation (Quantity)
HD151TS304ARPEL	SOP-8 pin (JEDEC)	FP-8DC	RP	EL (2,500 pcs / Reel)

Note: Please consult the sales office for the above package availability.

Block Diagram

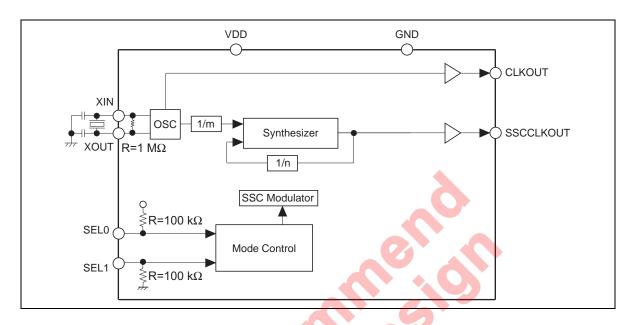

Pin Arrangement

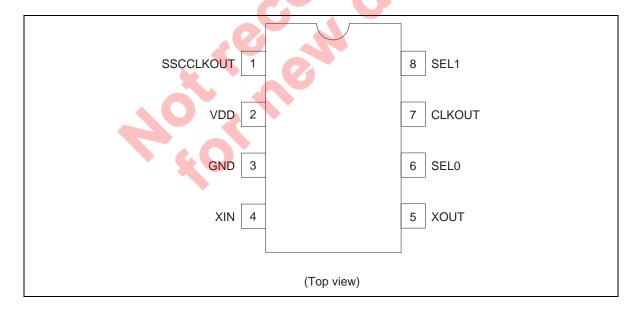

HD151TS304ARP

SSC Function Table

SEL1:0	Spread Percentage
0 0	±0.5%
0 1	±1.5%
10	SSC OFF
11	±0.25%

Note: ±1.5% SSC is selected for default by internal pull-up & down resistors.

Clock Frequency Table

XIN(MHz)	SSCCLKOUT(MHz)	CLKOUT(MHz)
48	48 ^{*1}	48 ⁻²
24	24 ^{*1}	24 ^{*2}

Notes: 1. With spread spectrum modulation.

2. Without spread spectrum modulation.

Pin Descriptions

Pin name	No.	Туре	Description
GND	3	Ground	GND pin
VDD	2	Power	Power supplies pin. Normally 3.3 V.
CLKOUT	7	Output	Normally 3.3 V reference clock output.
SSCCLKOUT	1	Output	Spread spectrum modulated clock output.
XIN	4	Input	Oscillator input.
XOUT	5	Output	Oscillator output.
SEL0	6	Input	SSC mode select pin. LVCMOS level input. Pull-up by internal resistor. (100 k Ω).
SEL1	8	Input	SSC mode select pin. LVCMOS level input. Pull–down by internal resistor (100 k Ω).

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit	Conditions
Supply voltage	VDD	-0.5 to 4.6	V	
Input voltage	Vı	-0.5 to 4.6	V	
Output voltage *1	Vo	-0.5 to VDD+0.5	V	
Input clamp current	I _{IK}	-50	mA	V _I < 0
Output clamp current	lok	-50	mA	V _O < 0
Continuous output current	Io	±50	mA	V _O = 0 to VDD
Maximum power dissipation at Ta = 55°C (in still air)		0.7	W	
Storage temperature	T _{stg}	-65 to +150	°C	

Notes: Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute maximum rated conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Item	Symbol	Min	Тур	Max	Unit Conditions
Supply voltage	VDD	3.135	3.3	3.465	V
DC input signal voltage		-0.3	_	VDD+0.3	V
High level input voltage	V _{IH}	2.0	_	VDD+0.3	V
Low level input voltage	VIL	-0.3	_	0.8	V
Operating temperature	Ta	0	_	70	°C
Input clock duty cycle		45	50	55	%

^{1.} The input and output negative voltage ratings may be exceeded if the input and output clamp current ratings are observed.

DC Electrical Characteristics

 $Ta = 0 \text{ to } 70^{\circ}\text{C}, VDD = 3.3 \text{ V} \pm 5\%$

Item	Symbol	Min	Тур	Max	Unit	Test Conditions
Input low voltage	V _{IL}	_	_	0.8	V	
Input high voltage	V _{IH}	2.0	_	_	V	
Input current	II	_	_	±10	μΑ	V _I = 0 V or 3.465 V, VDD = 3.465 V, XIN pin
		_	_	±100	_	V _I = 0 V or 3.465 V, VDD = 3.465 V, SEL0, SEL1 pins
Input slew rate		1	_	4	V / ns	20% – 80%
Input capacitance	Cı	_	_	4	pF	SEL0, SEL1
Operating current		_	7	_	mA	$XIN = 24 \text{ MHz}, C_L = 0 \text{ pF},$ VDD = 3.3 V

DC Electrical Characteristics / Clock Output & SSC Clock Output

 $Ta = 0 \text{ to } 70^{\circ}\text{C}, VDD = 3.3 \text{ V} \pm 5\%$

Item	Symbol	Min	Тур	Max	Unit	Test Conditions
Output voltage0	V _{OH}	3.1	-	_	V	$I_{OH} = -1 \text{ mA}, VDD = 3.3 \text{ V}$
	V _{OL}	_	-7	50	mV	I _{OL} = 1 mA, VDD = 3.3 V
Output current*1	Іон		-30	_	mA	V _{OH} = 1.5 V
	I _{OL}	-(30	_	_	V _{OL} = 1.5 V

Note: 1. Parameters are target of design. Not 100% tested in production.

AC Electrical Characteristics / Clock Output & SSC Clock Output

 $Ta = 25^{\circ}C$, VDD = 3.3 V, $C_L = 15 pF$

Item	Symbol	Min	Тур	Max	Unit	Test Conditions	Notes
Cycle to cycle jitter *1, 2	t _{CCS}	_	250	300	ps	SSCCLKOUT, 24 MHz	SSCOFF SEL1:0 = 10
		_	250	300		SSCCLKOUT, 48 MHz	¯Fig1
		_	250	300		SSCCLKOUT, 24 MHz	SSC= ±0.25% SEL1:0 = 11
		_	250	300		SSCCLKOUT, 48 MHz	Fig1
		_	250	300		SSCCLKOUT, 24 MHz	SSC= ±1.5% SEL1:0 = 01
		_	250	300		SSCCLKOUT, 48 MHz	¯Fig1
		_	250	300		CLKOUT, 24 MHz & 48MHz	Fig1
Output frequency *1, 2		23.8	_	24.2	MHz	SSCCLKOUT, XIN = 24 MHz	SSCOFF SEL1:0 = 10
		47.3	-	48.7	0	SSCCLKOUT, XIN = 48 MHz	_
	O	23.7	G	24.3		SSCCLKOUT, XIN = 24 MHz	SSC= ±0.25% SEL1:0 = 11 SSC= ±1.5% SEL1:0 = 01
		47.2	- <	48.8		SSCCLKOUT, XIN = 48 MHz	
		23.4	1	24.6		SSCCLKOUT, XIN = 24 MHz	
		46.6		49.4		SSCCLKOUT, XIN = 48 MHz	
		23.8	_	24.2		CLKOUT, 24 MHz	
		47.3	_	48.7		CLKOUT, 48 MHz	
Slew rate*1	t _{SL}	0.8	_	_	V/ns	@48 MHz CLKOUT	Γ 0.4 V to 2.4 V
Clock duty cycle *1		45	50	55	%		
Output impedance *1			40	_	Ω		
Spread spectrum modulation frequency *1			33	_	KHz	@48 MHz SSCCLKOUT	
Input clock frequency		10	_	60	MHz		
Stabilization time *1,3		_	_	2	ms		

- Notes: 1. Parameters are target of design. Not 100% tested in production.
 - 2. Cycle to cycle jitter and output frequency are included spread spectrum modulation.
 - 3. Stabilization time is the time required for the integrated circuit to obtain phase lock of its input signal after power up.

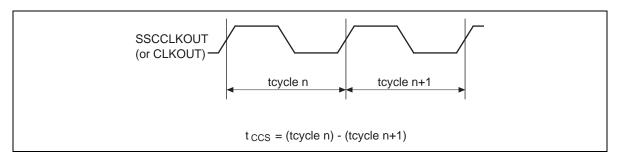


Figure 1 Cycle to cycle jitter



Application Information

1. Recommended Circuit Configuration

The power supply circuit of the optimal performance on the application of a system should refer to Fig. 2.

VDD decoupling is important to both reduce Jitter and EMI radiation.

The C1 decoupling capacitor should be placed as close to the VDD pin as possible, otherwise the increased trace inductance will negate its decoupling capability.

The C2 decoupling capacitor shown should be a tantalum type.

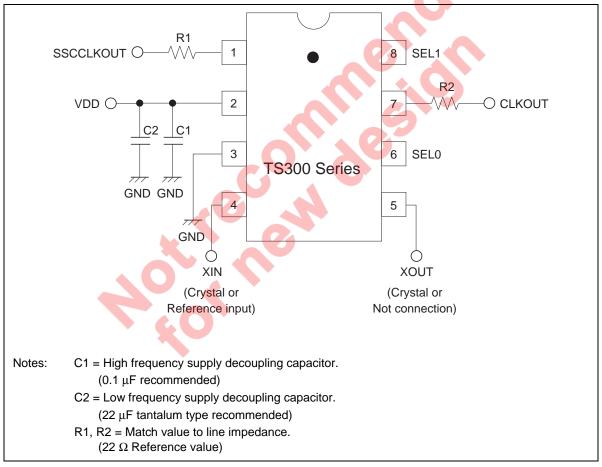


Figure 2 Recommended circuit configuration

2. Example Board Layout Configuration

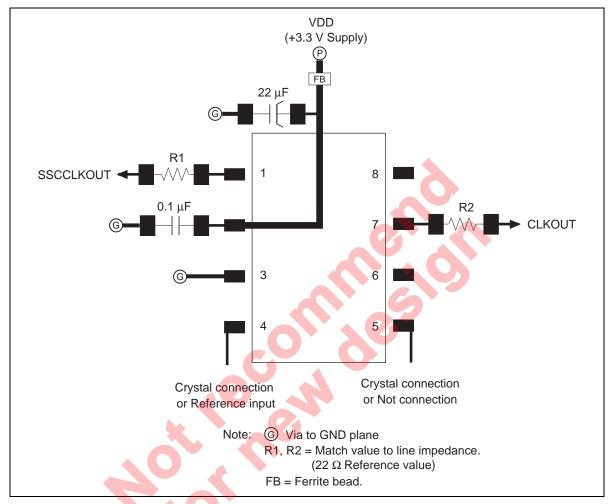


Figure 3 Example Board Layout

3. Example of TS300 EMI Solution IC's Application

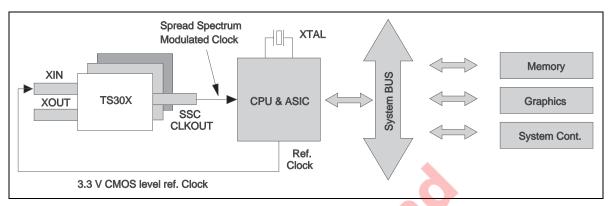


Fig 4 Ref. Clock Input Example


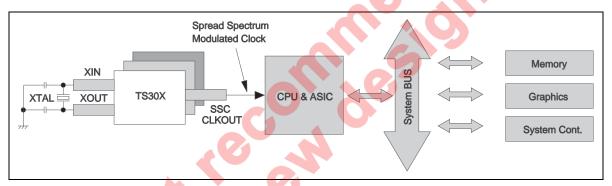


Fig 5 XTAL Ref. Clock Input Example

Package Dimensions



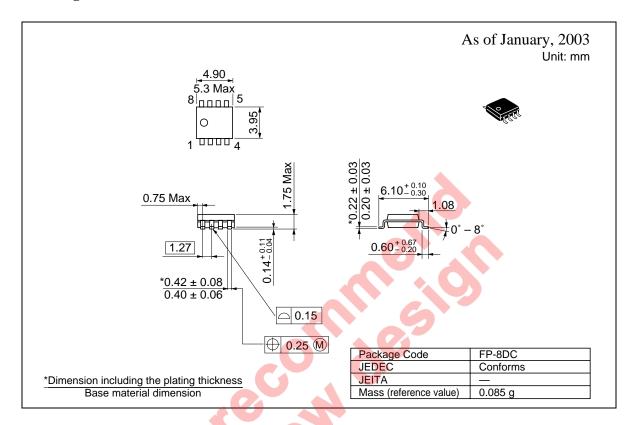

Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

The salesty institution designs:

1. Renessa Fechnology Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- Notes regarding these materials

 1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corporation product best suited to the customer's application; they
 do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation or a third party.

 2. Renesas Technology Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts,
 programs, algorithms, or circuit application examples contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these
 materials, and are subject to change by Renesas Technology Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers
 contact Renesas Technology Corporation or an authorized Renesas Technology Corporation tributed to the latest product information before purchasing a product listed
 herein
- herein.
 The information described here may contain technical inaccuracies or typographical errors.
 Renesas Technology Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
 Please also pay attention to information published by Renesas Technology Corporation by various means, including the Renesas Technology Corporation Semiconductor home page
- (http://www.neingany or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.

 5. Renesas Technology Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially

- at stake. Please contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.

 6. The prior written approval of Renesas Technology Corporation is necessary to reprint or reproduce in whole or in part these materials.

 7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
- Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited. 8. Please contact Renesas Technology Corporation for further details on these materials or the products contained therein.



http://www.renesas.com

Copyright © 2003. Renesas Technology Corporation, All rights reserved. Printed in Japan. Colophon 0.0

