

QE for Lighting & Power V2.0.0

Release Note

Thank you very much for using the QE for Lighting & Power V2.0.0, a QE (Quick and Effective Tool Solution) product of Renesas Solution Toolkit - Development Support Tool for Various Applications.

This release note covers product installation, restrictions, and so on. Please read this document before using the product.

Contents

1. About QE for Lighting & Power	3
1.1 Summary	3
1.2 Functions	3
1.3 New Functions	3
1.3.1 Support application program download function	3
1.3.2 Support simulation function	4
1.3.3 Support e ² studio project	4
1.3.4 Support custom board evaluation function	5
1.3.5 Improve power configuration and power evaluation view	5
1.3.6 Eliminate the limitation of using IAR compiler	6
1.3.7 Eliminate the limitation of writing the evaluation program on board	6
1.4 Supported Environment	6
1.5 Supported Microcontrollers and Boards	6
2. Installation and Uninstallation	7
2.1 Installing This Product	7
2.2 Updating This Product	7
2.3 Uninstalling This Product	7
3. Notes / Restrictions	8
3.1 Usage Considerations	8
3.1.1 Notes on power control evaluation	8
3.1.2 Notes on DALI configuration default value and generated program	9
3.1.3 Notes on opening [Lighting & Power Workflow (QE)] view	9
3.1.4 Notes on integrated Renesas libraries	9
3.1.5 Notes on using the Smart Configurator	10
3.1.6 Notes on power control simulation time	10
3.1.7 Notes on IDE usage for building	11
3.1.8 Notes on sample code license	11
3.1.9 Notes on e ² studio build function	12
3.1.10 Notes on application program download function	13

3.2 Functional Restrictions 13

4. About the Software Bill of Materials (SBOM)..... 14

Revision History 15

1. About QE for Lighting & Power

1.1 Summary

QE for Lighting & Power is an assistance tool for smart lighting and digital power supply system solution development, which seamlessly integrates with Renesas' lighting system libraries, reference solution programs, various compilers, and evaluation boards. Using this tool, you can configure lighting communication settings and adjust the power control parameters in real-time, enabling simple, quick, and more efficient solution development.

1.2 Functions

The main functions and support scenarios are listed in Table 1-1:

Table 1-1

Functions	Using Renesas Board	Using Custom Board
Configure dimming protocol parameters with graphical UI	Support	Support
Simulate power control parameters without equipment	Support	Not support
Evaluate power control parameters on the board	Support	Support
Generate the source code using various compilers	Support	Support
Build and program the lighting system solution to the evaluation board	Support	Not Support

1.3 New Functions

1.3.1 Support application program download function

From QE for Lighting & Power V2.0.0, users can download the application program from web site.

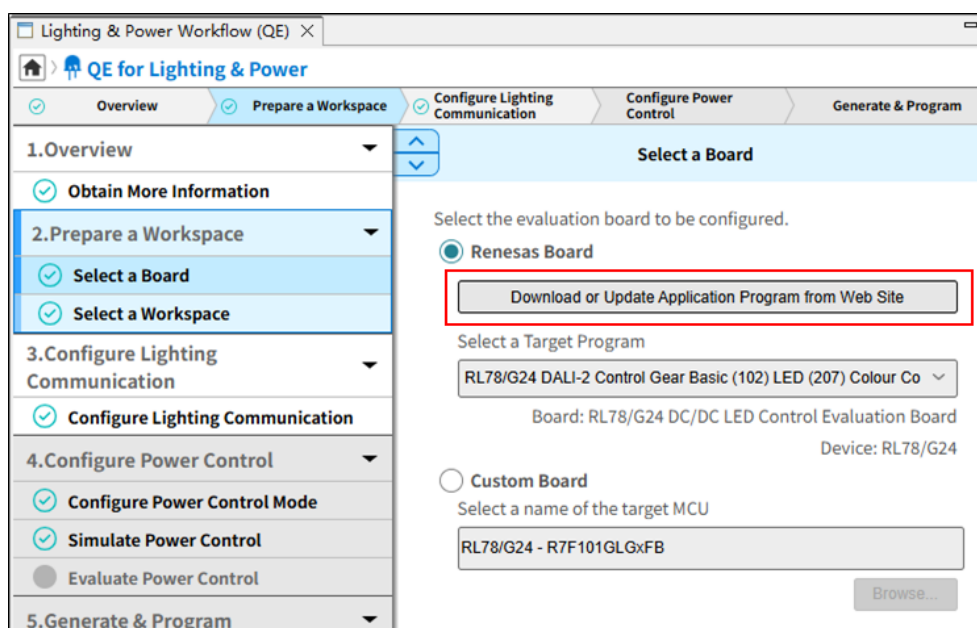


Figure 1-1 [Download or Update Application Program from Web Site] button

1.3.2 Support simulation function

In the previous version, simulation was supported through an external tool. From QE for Lighting & Power V2.0.0, the simulation function is built-in, allowing users to launch the simulation dialog with a single click. Both parameter configuration and simulation results are displayed within this dialog.

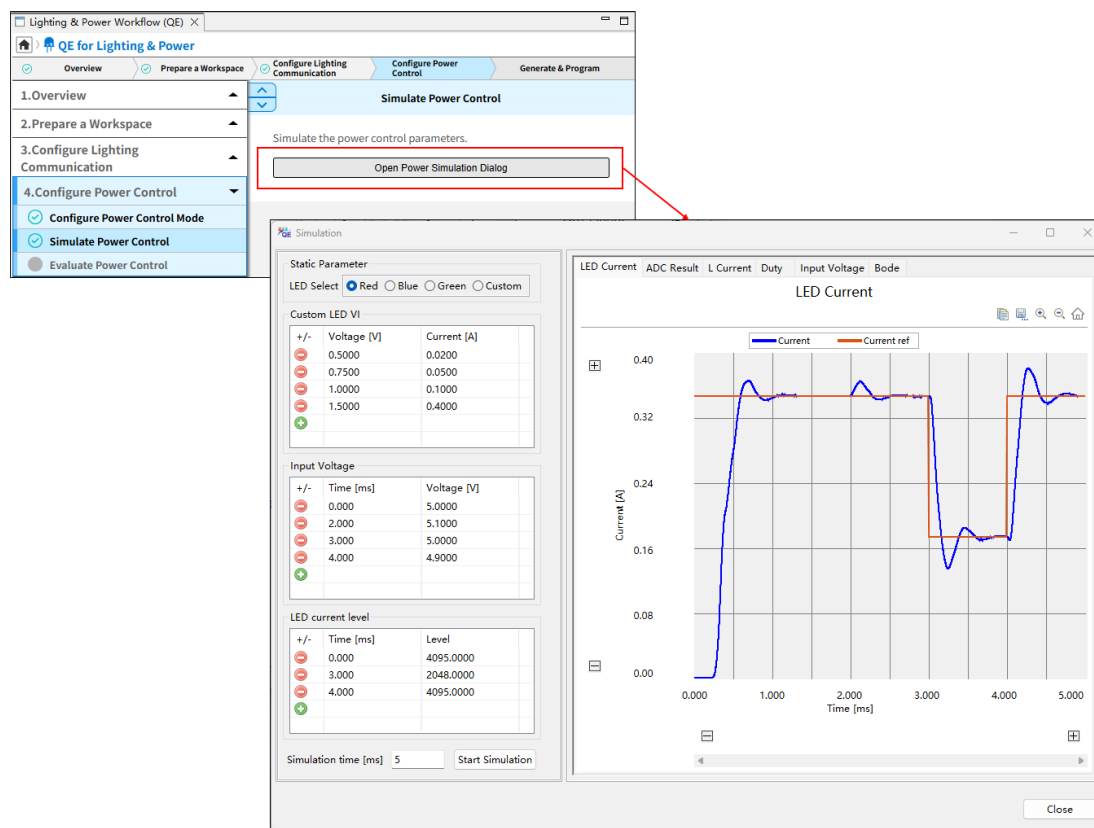


Figure 1-2 Power control simulation function

1.3.3 Support e² studio project

Form QE for Lighting & Power V2.0.0, e² studio project is supported in this tool. If the application program includes e² studio project, it can be utilized directly within the QE for Lighting & Power tool.

Before using e² studio project, specify e² studio installation location through "[Windows] > [Preferences] > [QE for Lighting & Power]" menu.

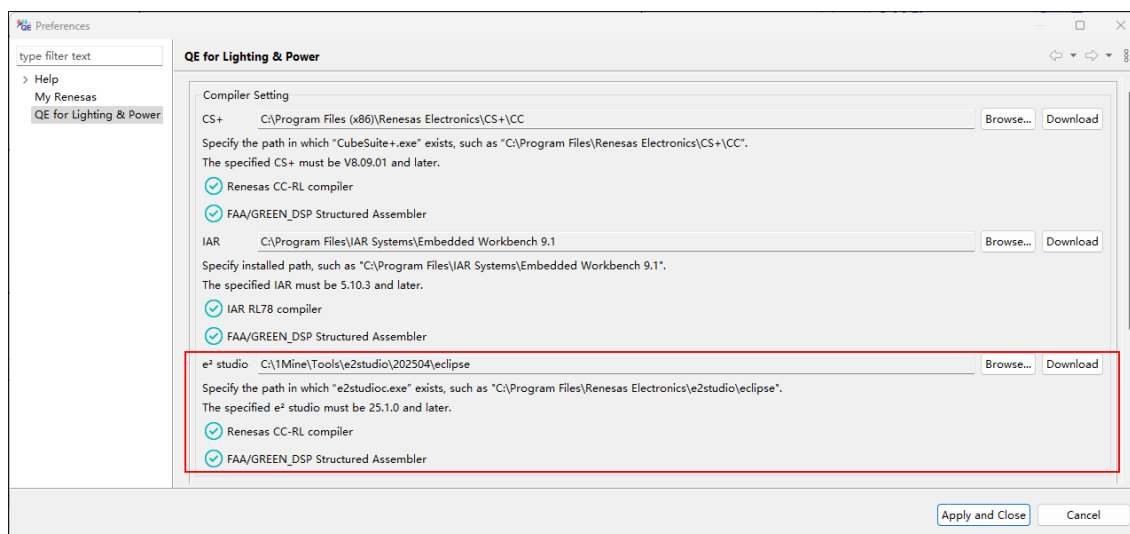


Figure 1-3. To specify e² studio installation location

1.3.6 Eliminate the limitation of using IAR compiler

From V2.0.0, this tool supports IAR license validity checks and stops compilation if the license is invalid, avoid becoming stuck due to an invalid IAR license during proceeding the following operations:

- 1) Click on [Write the Evaluation Program on Board] button in the workflow.
- 2) Click on [Build Source Code] button in the workflow.

1.3.7 Eliminate the limitation of writing the evaluation program on board

From V2.0.0, the evaluation program can be successfully written to board without keeping [Power Evaluation (QE)] view open.

1.4 Supported Environment

- Windows 11 (64-bit version)
- Renesas Flash Programmer V3.11.02
- Smart Configurator for RL78 V1.12.0

1.5 Supported Microcontrollers and Boards

The supported microcontrollers and their corresponding boards are listed in Table 1-2:

Table 1-2

Microcontrollers	Boards
<ul style="list-style-type: none"> • RL78/G24 	RL78/G24 DC/DC LED Control Evaluation Board (P/N: R7F101GLG2DFB)
	RL78/G24 Interleaved PFC + LLC Board 400W
	Custom Board
<ul style="list-style-type: none"> • RL78/G22 • RL78/G23 • RL78/L23 	Custom Board

2. Installation and Uninstallation

2.1 Installing This Product

QE for Lighting & Power is provided as a compressed package (.zip). Follow the procedure below to use this product.

1. Extract ".zip" file to a user-specified location on the PC.
Note: Please do not put the tool under OS program folder (C:\Program Files)
2. Start this product by double clicking "\QE-Lighting-Power\eclipse\qe-lighting-power.exe".
3. For the first time this product starts, there is a dialog of license agreement. After checking the license, you can select "Agree" or "Disagree".

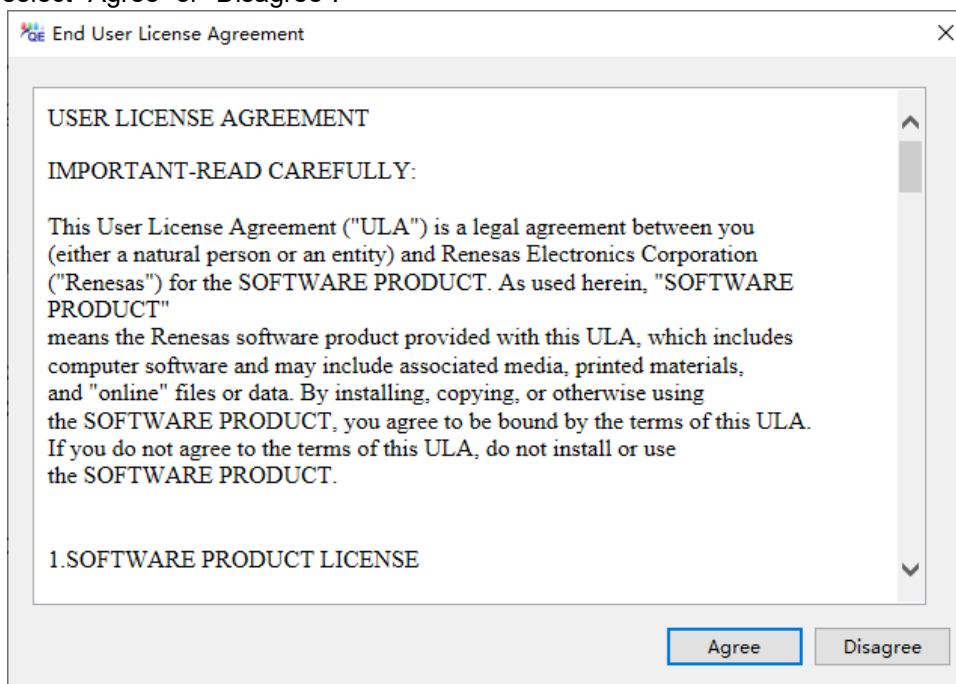


Figure 2-1. License agreement dialog

4. If "Agree" is selected in above step, the product is launched then you can use it; if "Disagree" is selected in above step, the product won't be launched.

2.2 Updating This Product

If you have already used this product, you can update it in the same way as the procedure for installation.

2.3 Uninstalling This Product

Delete the entire folder which .zip package is extracted.

3. Notes / Restrictions

3.1 Usage Considerations

Please pay attention to the following items.

3.1.1 Notes on power control evaluation

- 1) [Only for RL78/G24 DC/DC LED Control Evaluation Board] When selecting FAA program type, it is possible to monitor up to 4 power control parameters. Please add no more than 4 parameters in [Variable Tuning] tab. When selecting CPU program type, it is possible to monitor up to 8 power control parameters.

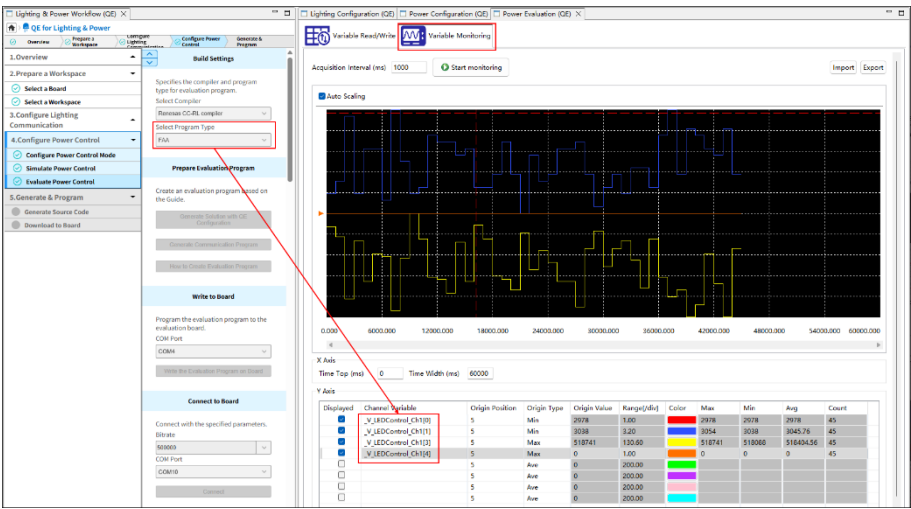


Figure 3-1 (1). Variable tuning when FAA program type is selected

- 2) When the [Acquisition Interval] is set to a smaller value, the sampling rate increases, resulting in a larger amount of tuning data. This large volume of data may affect the monitoring stop operation. To ensure timely stopping after clicking the [Stop monitoring] button, it is recommended to set the [Acquisition Interval] to one of the following values: 1000ms, 500ms, or 200ms.

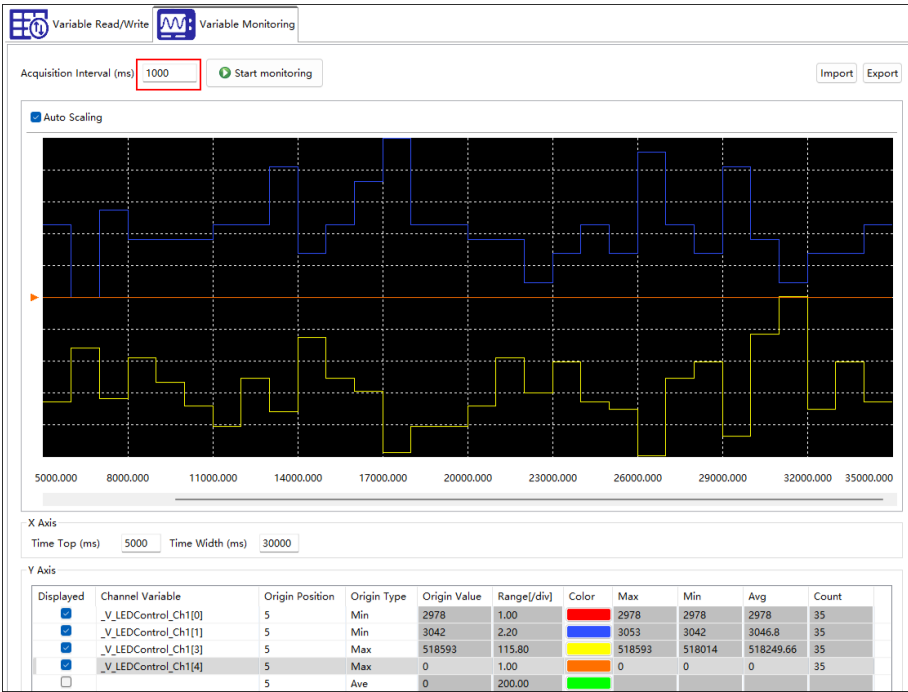


Figure 3-1 (2). [Acquisition Interval] option

If a smaller [Acquisition Interval] is set, the message “[Error]STOP command failed to execute.” is output in console view. In this situation, please click [Stop monitoring] button manually.

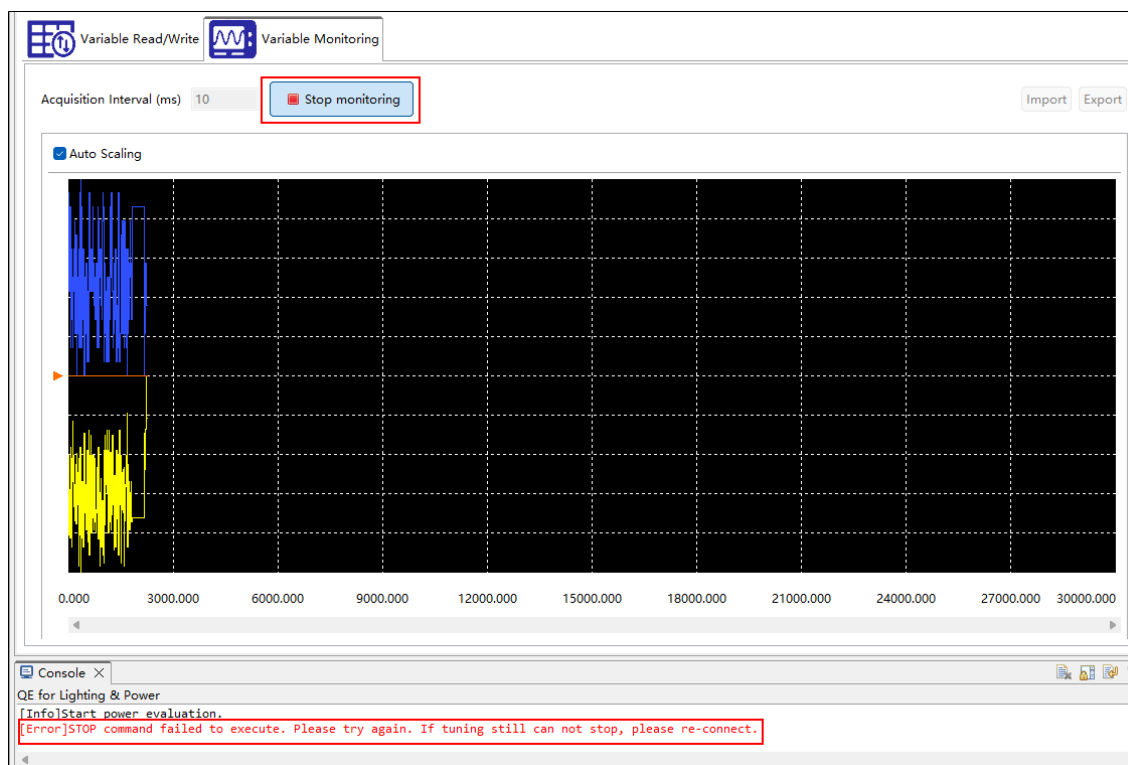


Figure 3-1 (3). Stop monitoring manually.

3.1.2 Notes on DALI configuration default value and generated program

Both the default value on the DALI configuration UI and the generated program are based on RL78/G24 Sample Application (R01AN7043EJ0100). When modifying DALI configuration, please consider the change matches the DALI standard (IEC 62386), modify the user-defined part in the generated code according to the user's purpose if necessary, and evaluate it thoroughly.

3.1.3 Notes on opening [Lighting & Power Workflow (QE)] view

The workflow cannot be opened if WebView2 Runtime is not installed on your PC.

[Workaround]

Download and install WebView2 (x64 version) from the Microsoft web page. (FAQ: [3000670](#))

3.1.4 Notes on integrated Renesas libraries

The following Renesas libraries are integrated into the QE for Lighting & Power tool.

- RL78 Family DALI-2 Control Gear Library User's Manual: Basic (R01US0535EJ0102)
- RL78 Family DALI-2 Control Gear Library User's Manual: LED (R01US0536EJ0102)
- RL78 Family DALI-2 Control Gear Library User's Manual: Colour Control (R01US0537EJ0102)
- Renesas Flash Driver RL78 Type 01 Package V1.20 for RL78/G2x

3.1.5 Notes on using the Smart Configurator

When using custom board, before clicking [Generate Driver Code via Smart Configurator] button in the workflow, please ensure the Smart Configurator tool path is correctly set via "[Windows] > [Preferences] > [QE for Lighting & Power]" menu.

If the specified installation path is invalid, this operation will cause Smart Configurator to fail to launch and the message "Failed to open Smart Configurator, please try again." is output in console view.

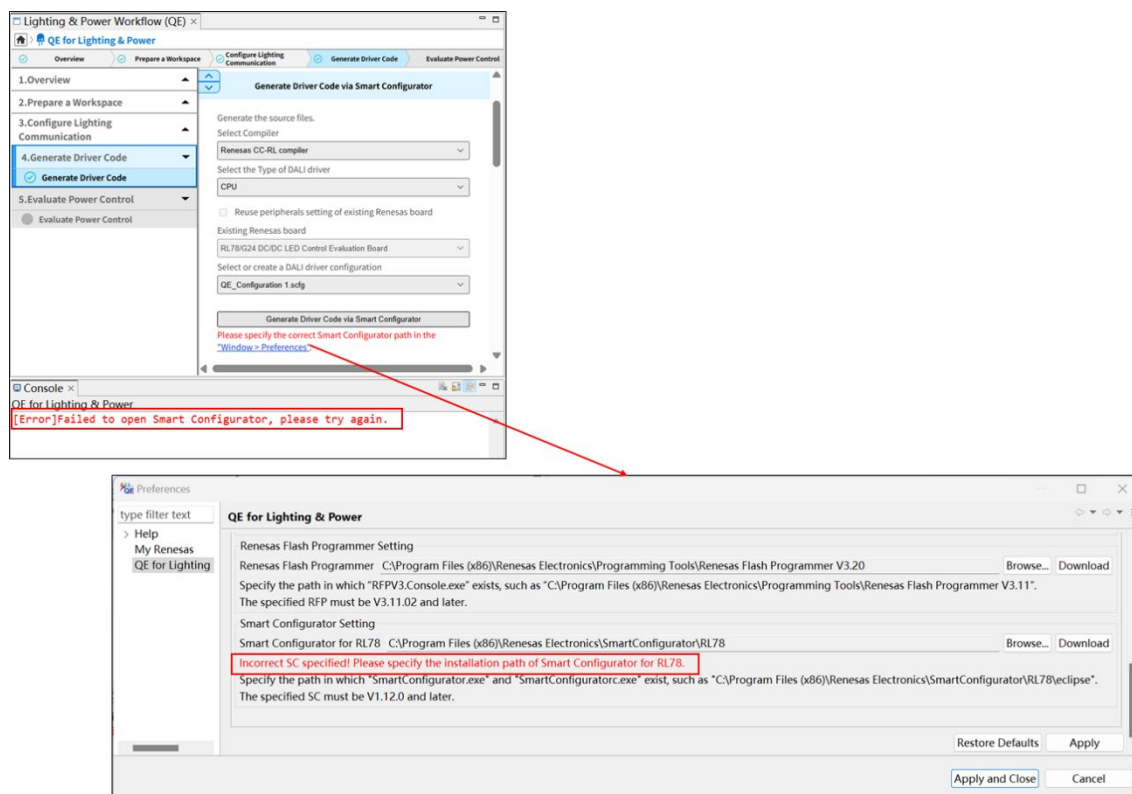


Figure 3-2. Error message when Smart Configurator tool path in Preferences is invalid

3.1.6 Notes on power control simulation time

When the [Simulation time] is set to a large value, it generates a significant amount of simulation data. This can affect the following 2 aspects.

- 1) The simulation execution time will increase.
- 2) The memory usage will rise. If the simulation time is excessively long, it may eventually lead to an out-of-memory error.

Therefore, it is recommended to set the [Simulation time] below 5000ms.

3.1.7 Notes on IDE usage for building

The following 3 IDEs are available for building function when using Renesas board.

- 1) CS+ for CC
- 2) IAR Embedded Workbench for Renesas RL78
- 3) e² studio

Before using any of these IDEs, please refer to the corresponding application notes and set the IDE path correctly in the Preferences.

And please ensure that the IDE version matches the version specified in the APN. Otherwise, the [Variable Read/Write] function may not operate correctly.

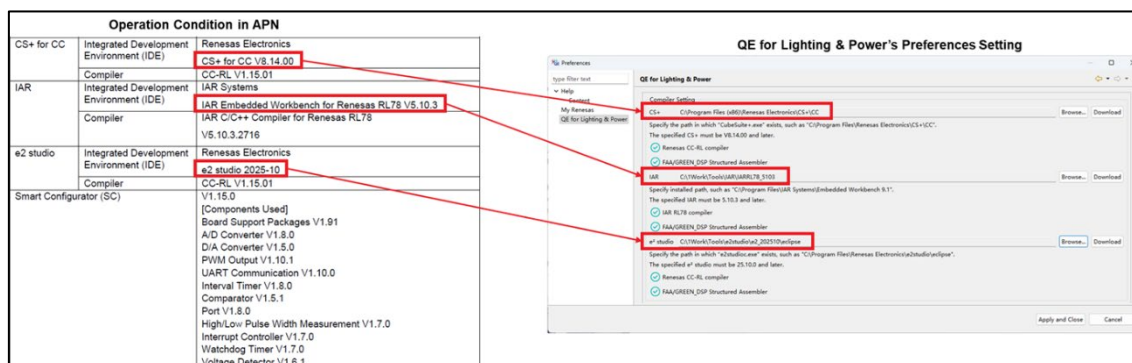


Figure 3-3. IDE settings that matched with the APN conditions

3.1.8 Notes on sample code license

The license applied to the sample code generated by this tool is BSD-3-Clause.

BSD 3-Clause License

Copyright 2025, Renesas Electronics Corporation and/or its affiliates

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of the copyright holder nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

3.1.9 Notes on e² studio build function

When building a project using the “Renesas CCRL compiler (e² studio)”, an “E2studioc” dialog box may appear. This behavior may be caused by one of the following reasons.

- 1) The target program contains compilation errors.

[Phenomenon]

After closing the “E2studioc” dialog box, compilation error messages are displayed in the Console view.

- Note. When the target project is compiled for the first time, compilation error messages may not be displayed. In this case, run the build again to make the error messages visible in the Console view.

[Workaround]

Fix the issues reported in the Console output and rebuild the project using this tool.

- 2) An unexpected issue occurred in the e² studio workspace.

[Workaround]

Manually delete the folder “<workspace>\qeLighting_gen\le2_qeBuild” and retry the build.

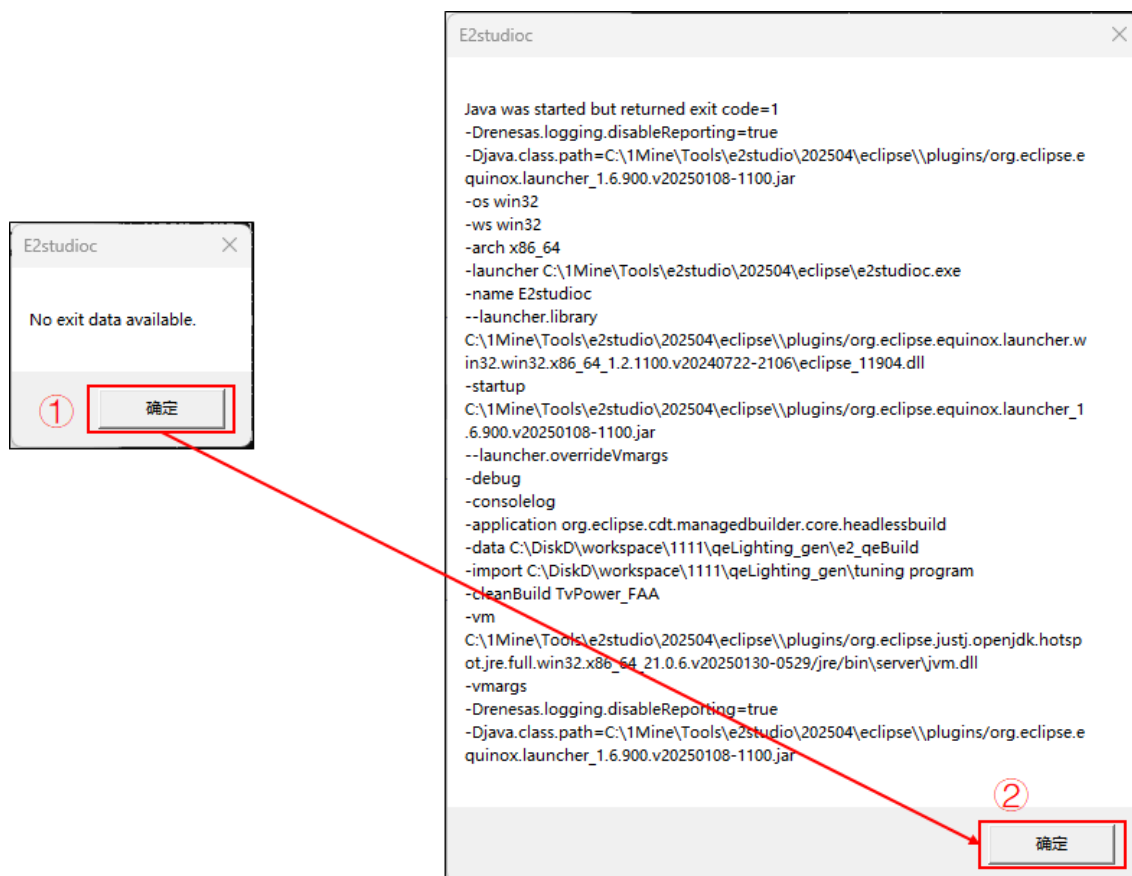


Figure 3-4. Error dialog when using “Renesas CCRL compiler (e² studio)” for building

3.1.10 Notes on application program download function

Application programs can be downloaded only after they have been published on Renesas website.

At the initial release of V2.0, no APN is available, so the [Console] view displays the following message.

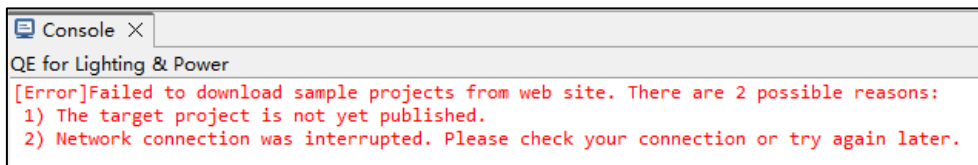


Figure 3-5 (1). Console message when application program download is not available

In this case, you can use either the pre-installed “RL78/G24 DALI-2 Control Gear Basic (102) LED (207) Colour Control (209) Sample Application” or choose a custom board.

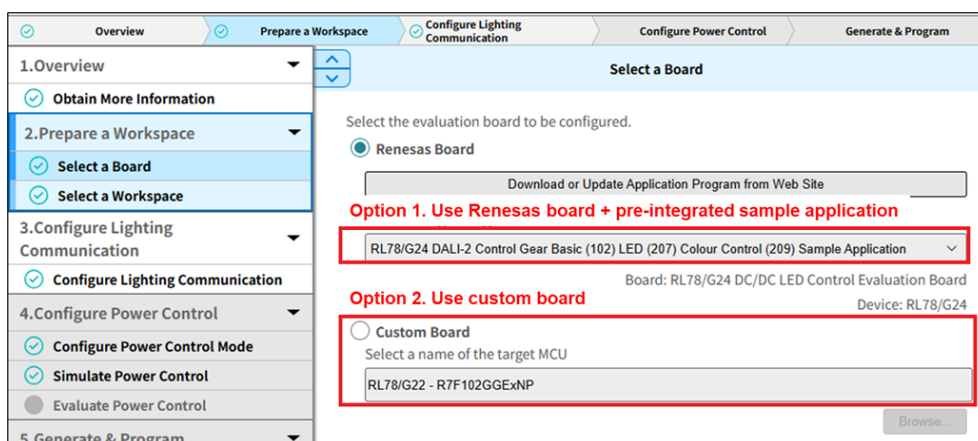


Figure 3-5 (2). Available options when application program download is not available

3.2 Functional Restrictions

There are no restriction in QE for Lighting & Power V2.0.0.

4. About the Software Bill of Materials (SBOM)

For this release, a Software Bill of Materials (SBOM) is provided to describe the software components and OSS license information included in this product.

The SBOM is created in SPDX Lite format and is included in the zip archive distributed together with this release note.

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Apr.15.26	-	First edition issued.
1.10	Apr.27.26	3	Updated the description in 1.1 Summary.
		14	Added 4. About the Software Bill of Materials (SBOM)

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity.

Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:

www.renesas.com/contact/.