


R7F100L

Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/HOCO_32/24/16/8/4MHz/HS MODE)

Prepared on Jul. 7th, 2025

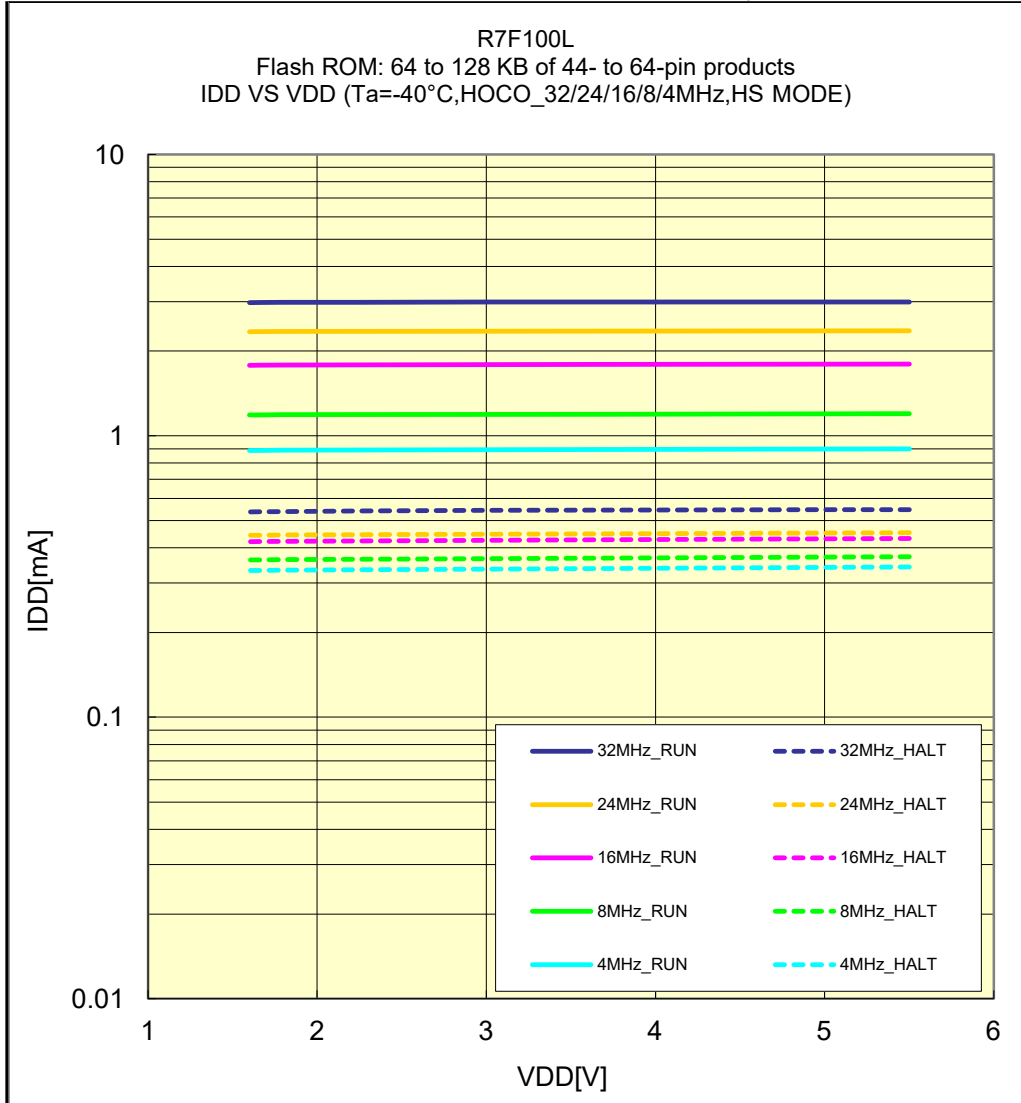


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/HOCO_16/8/4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

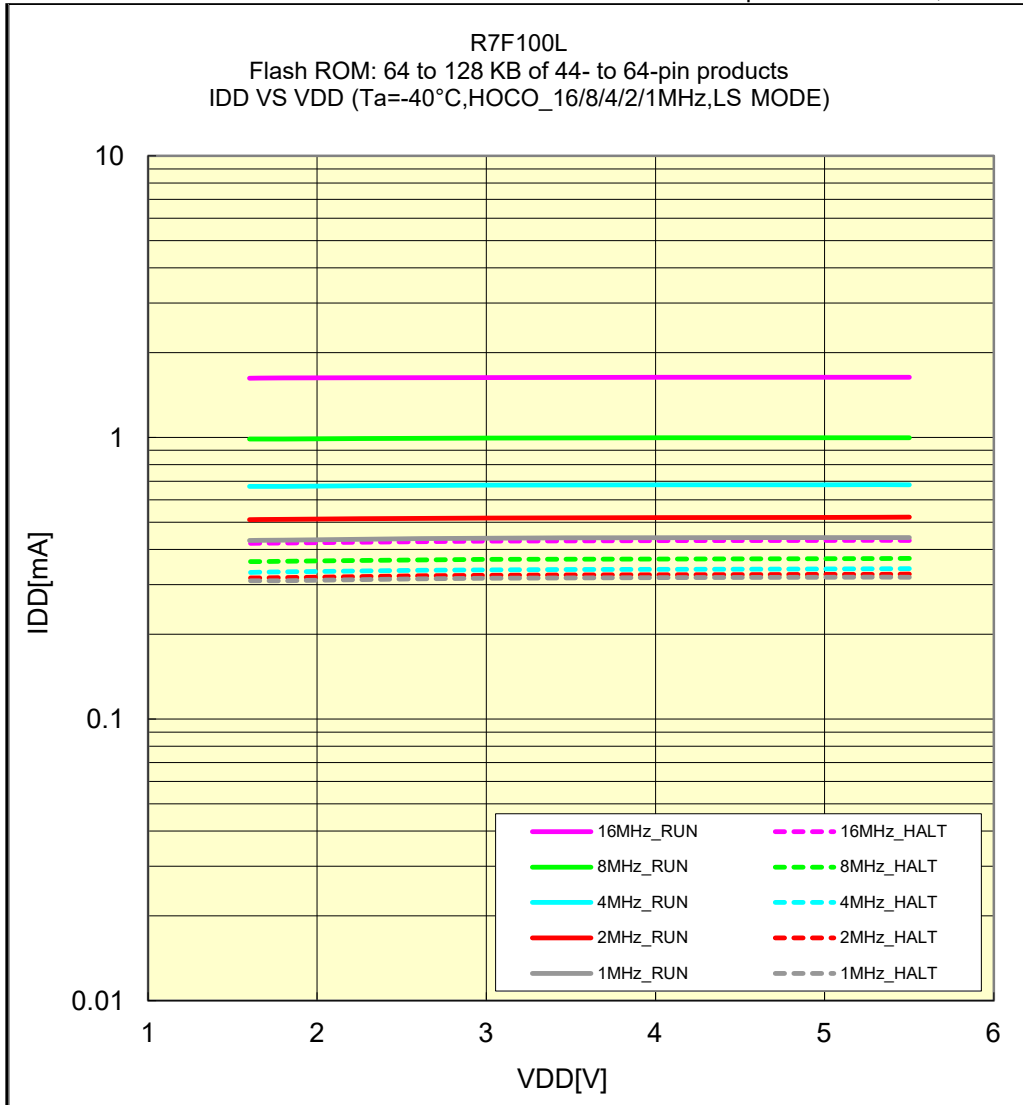


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/HOCO_24/12/6/3MHz/LS MODE)

Prepared on Jul. 7th, 2025

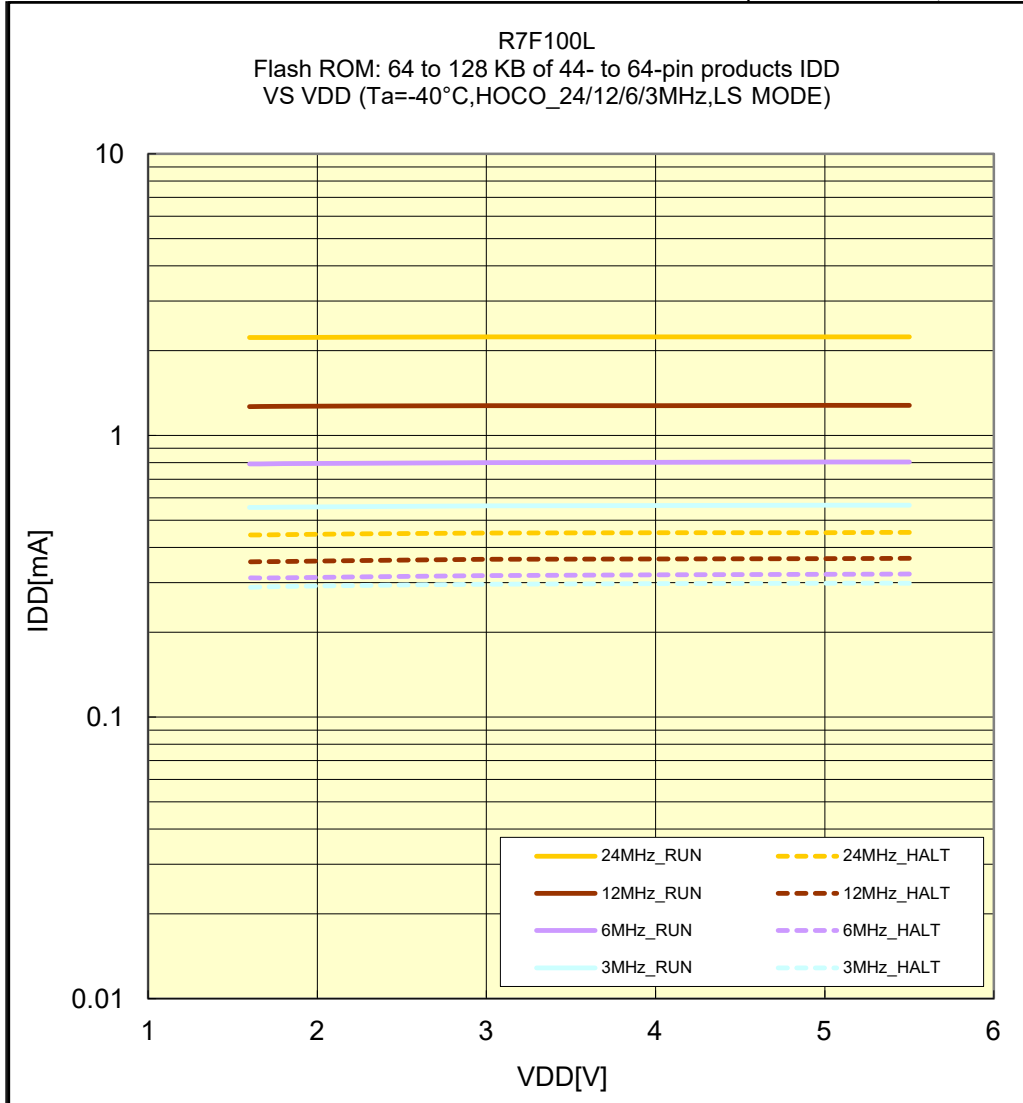


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/MOCO_4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

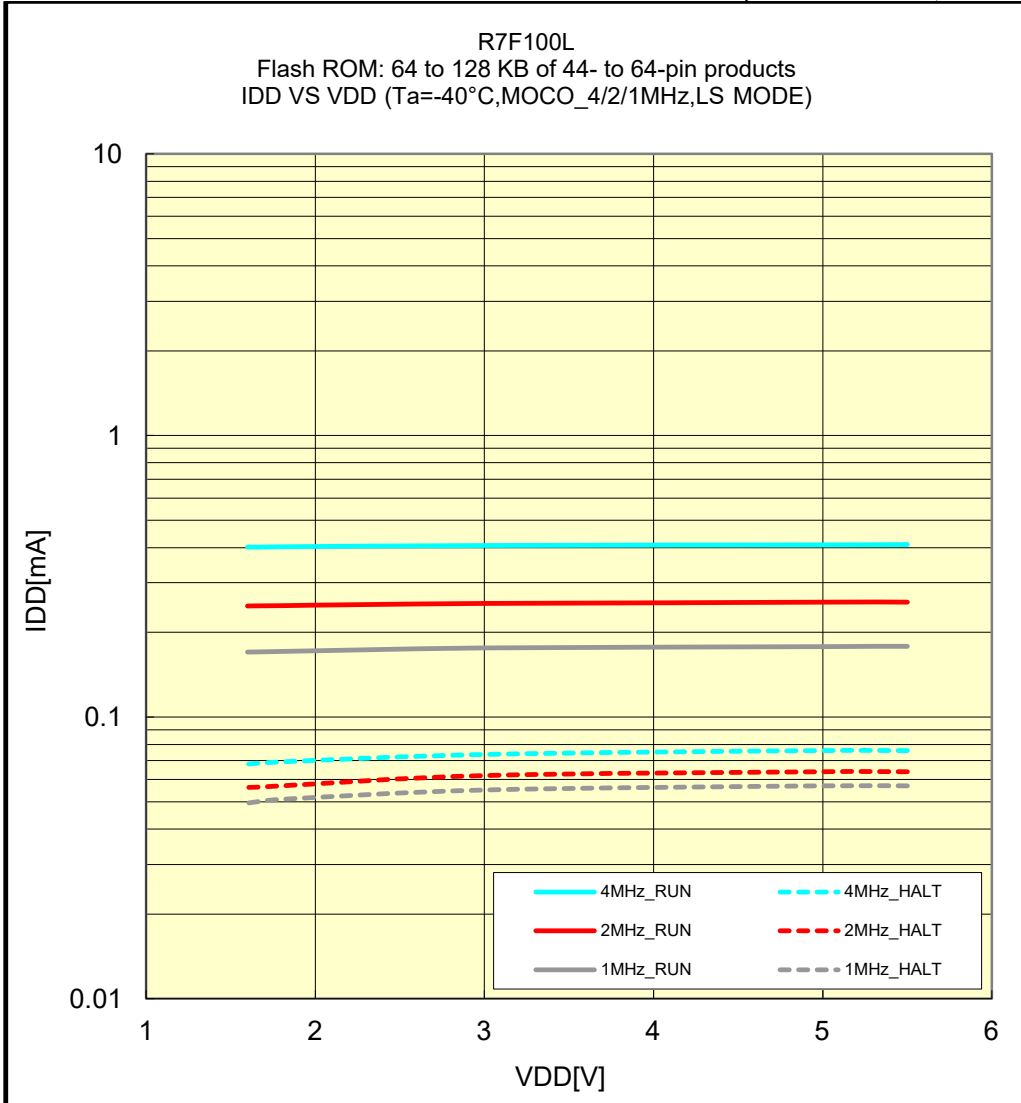


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/X'TAL/LS MODE)

Prepared on Jul. 7th, 2025

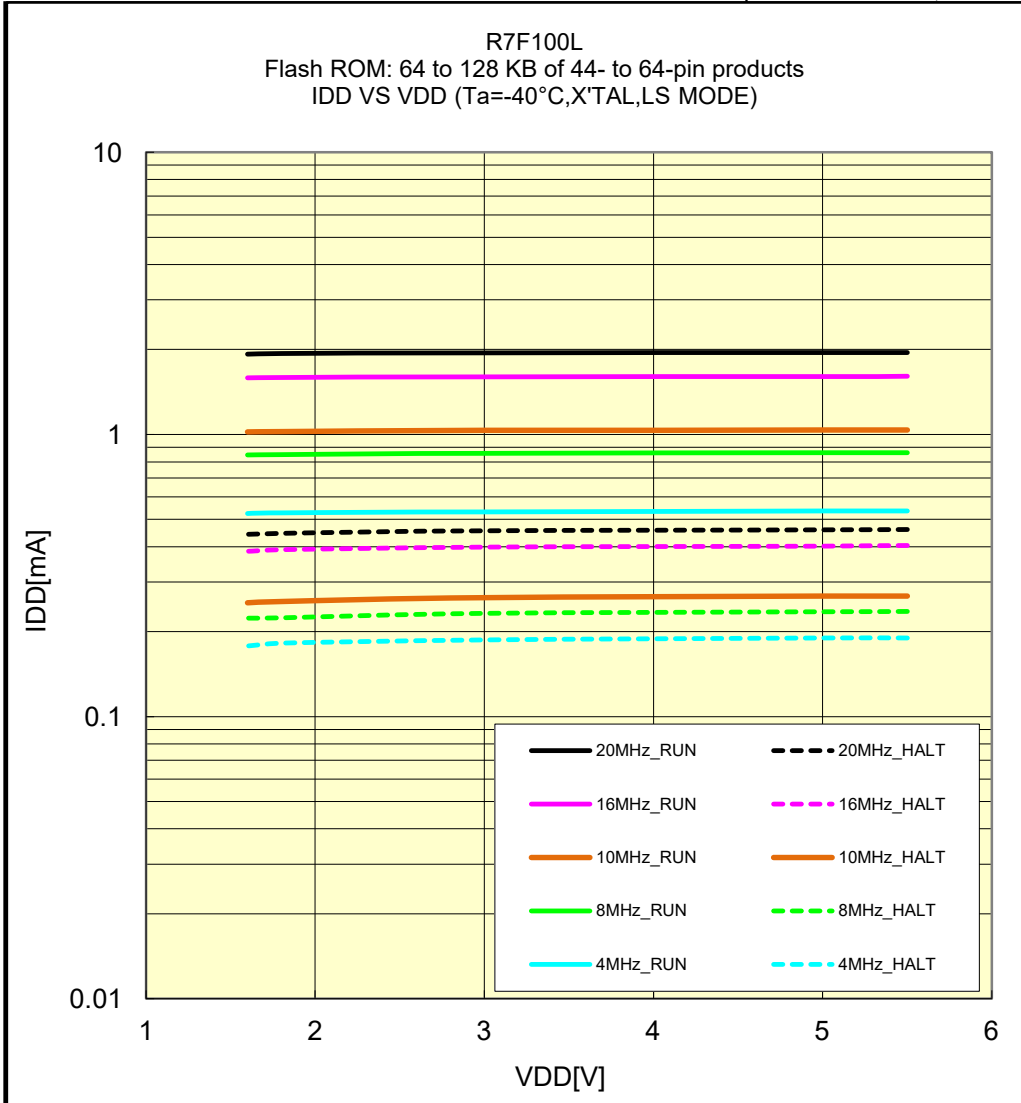


Remark 1MHz: 4MHz / 4 (MOSCDIV = 02H)
2MHz: 4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/HOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

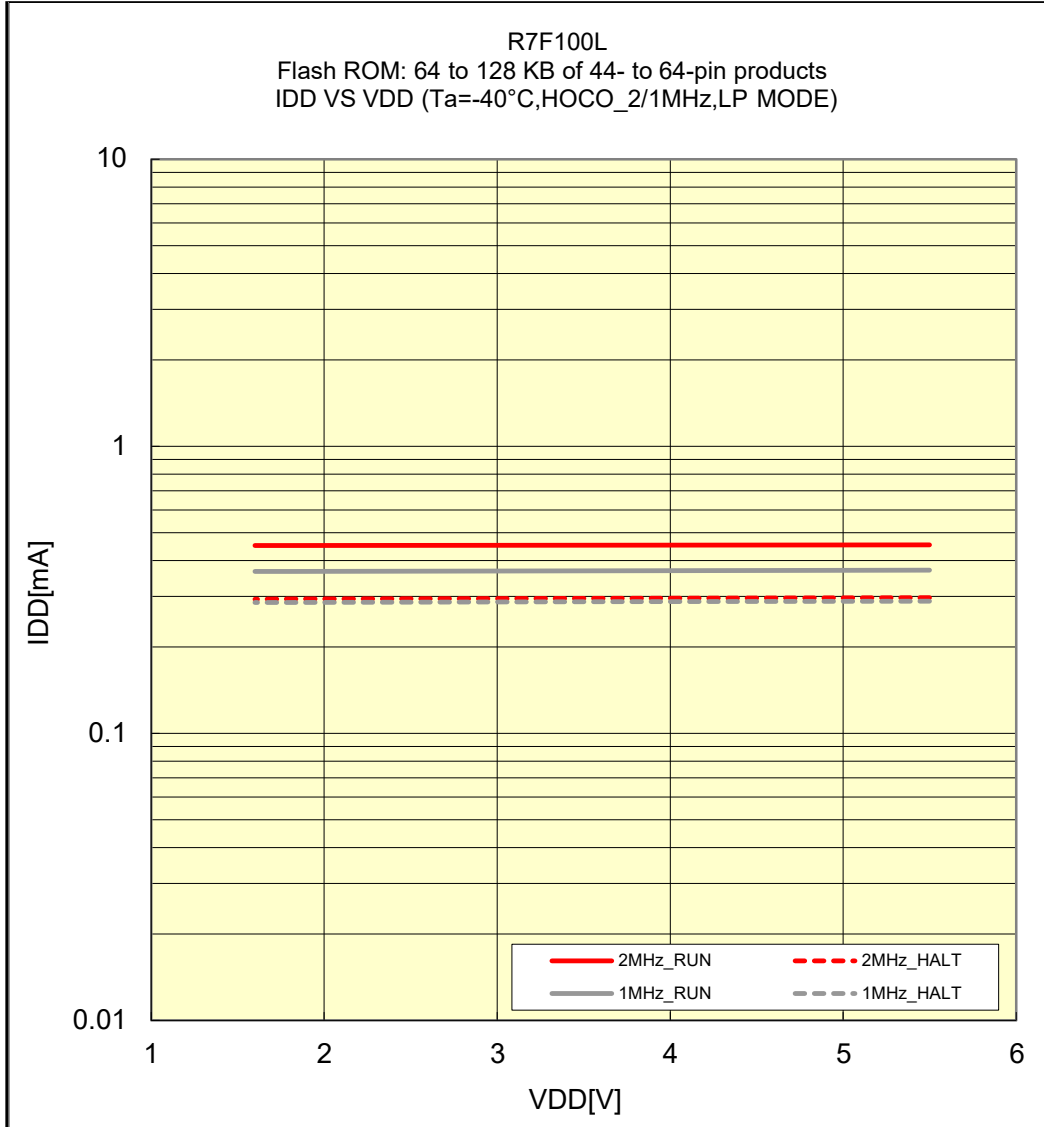


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/MOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

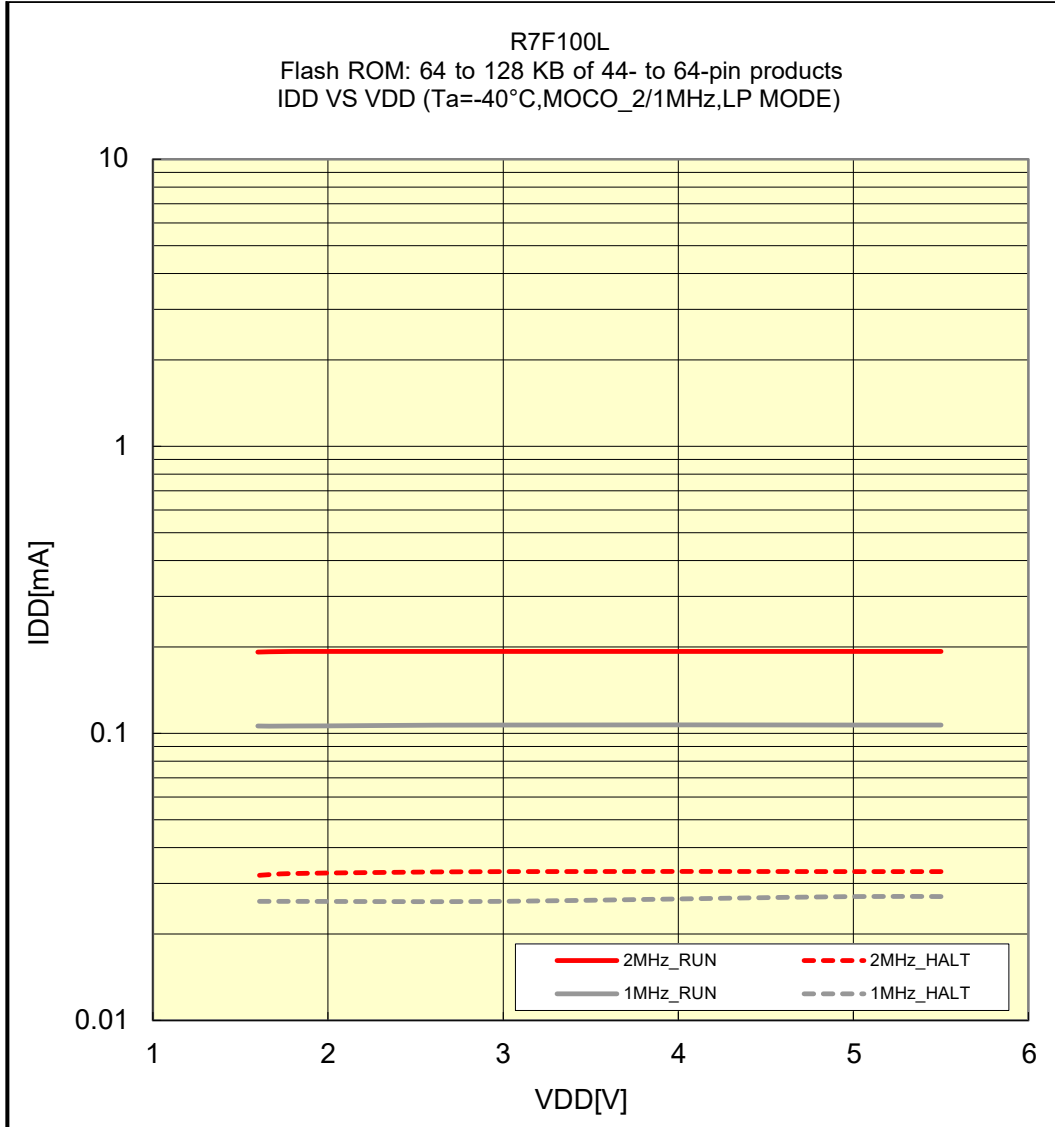


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/X'TAL/LP MODE)

Prepared on Jul. 7th, 2025

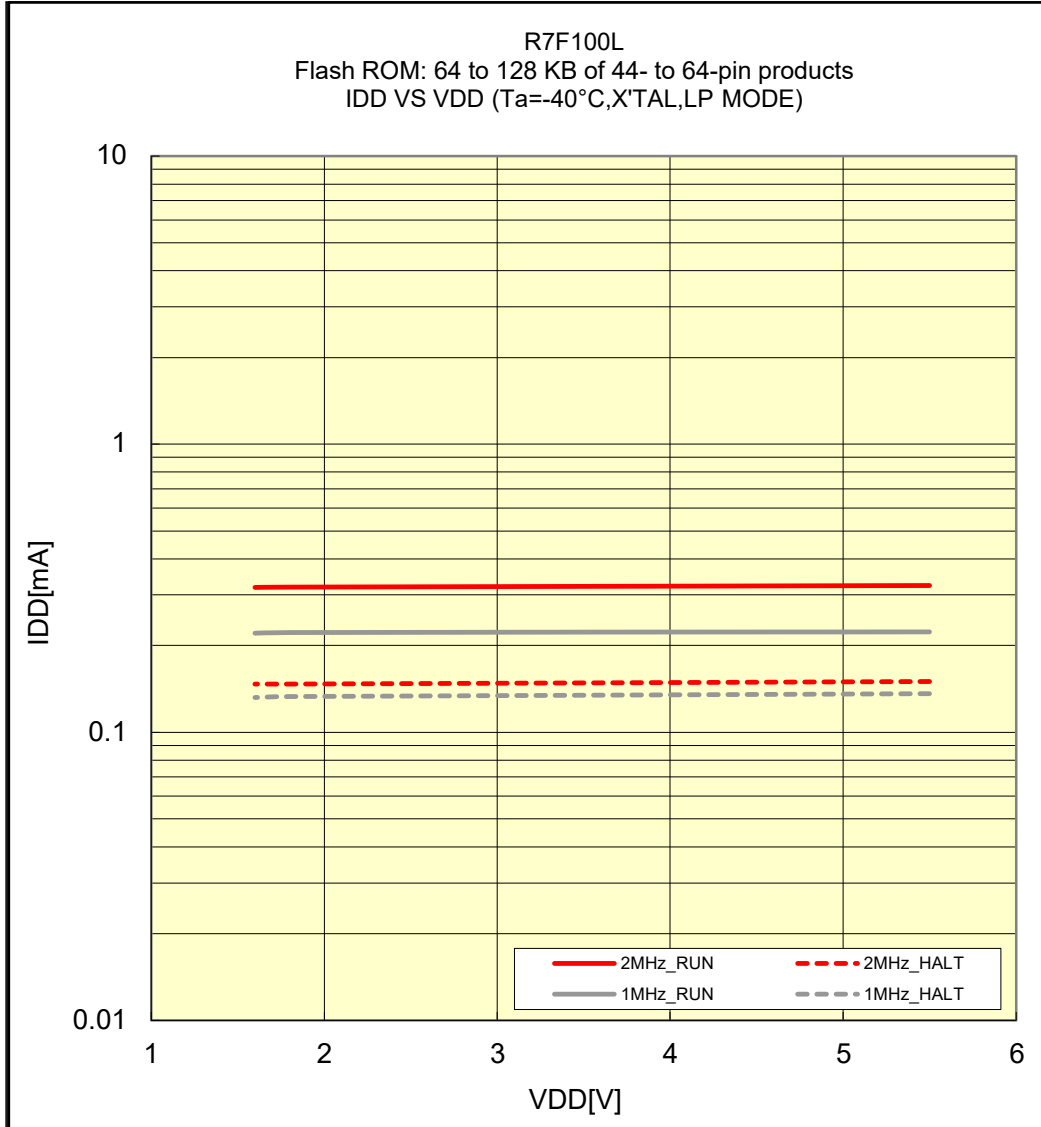


Remark 1MHz:4MHz / 4 (MOSCDIV = 02H)
2MHz:4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/LOCO/32.768KHz)

Prepared on Jul. 7th, 2025

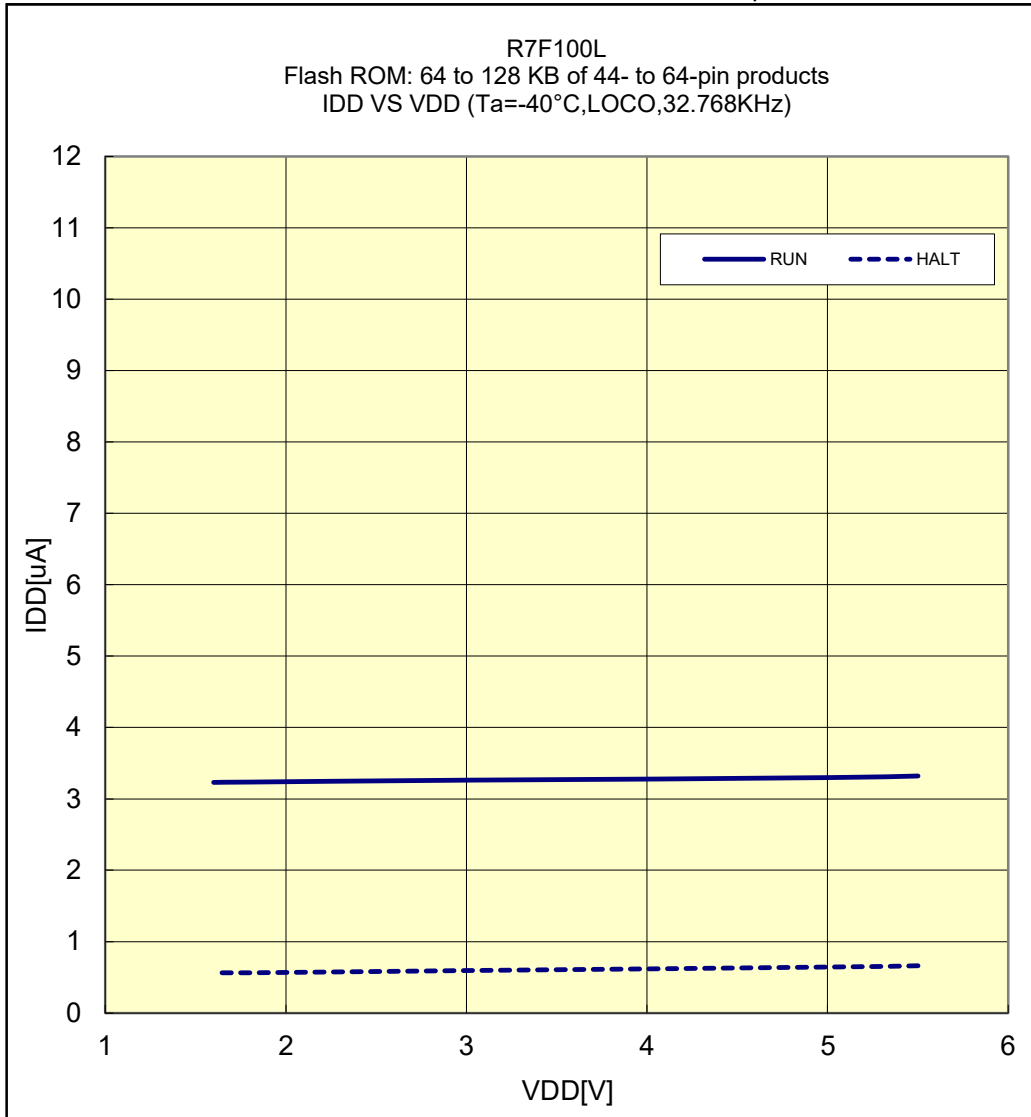


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(-40°C/sub_clock/32.768KHz)

Prepared on Jul. 7th, 2025

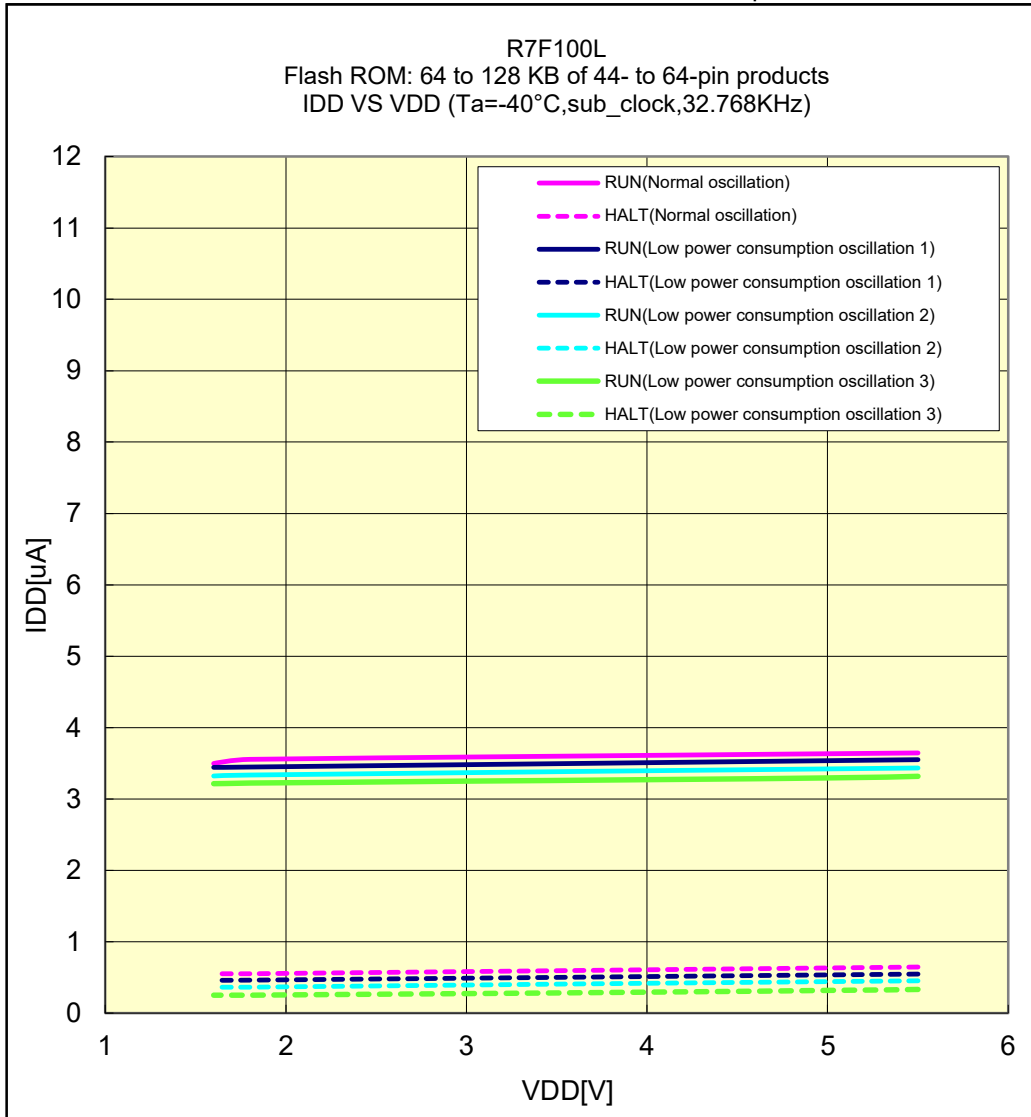


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/HOCO_32/24/16/8/4MHz/HS MODE)

Prepared on Jul. 7th, 2025

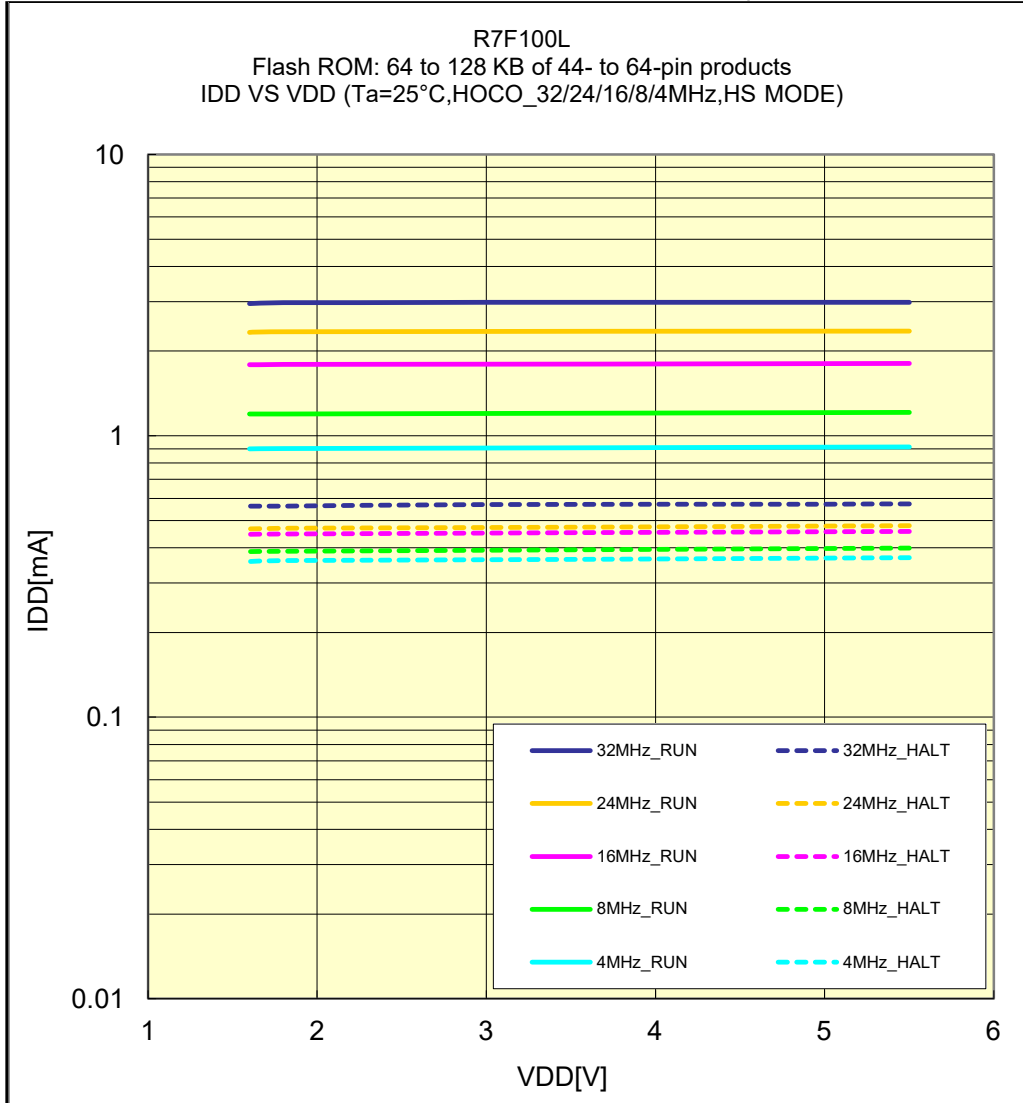


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/HOCO_16/8/4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

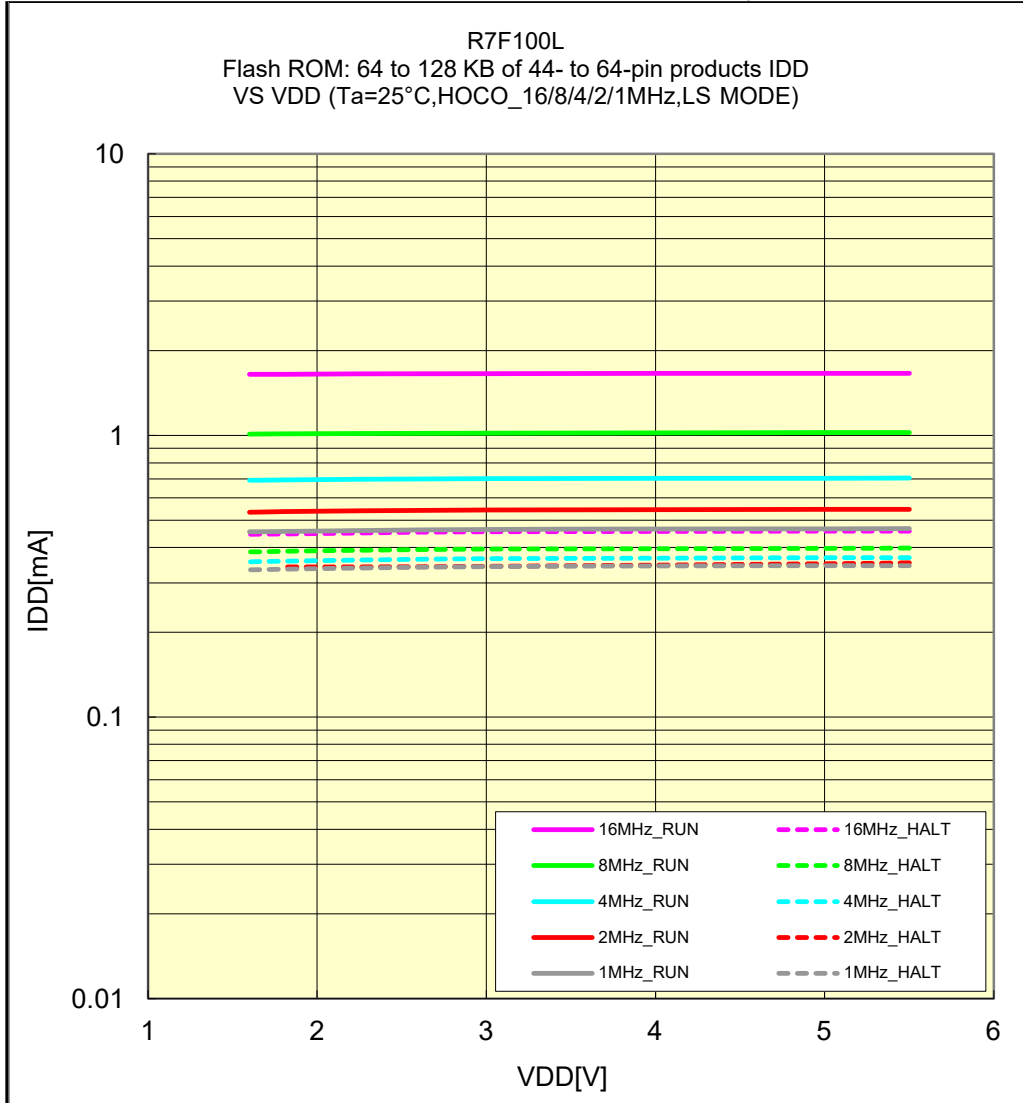


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/HOCO_24/12/6/3MHz/LS MODE)

Prepared on Jul. 7th, 2025

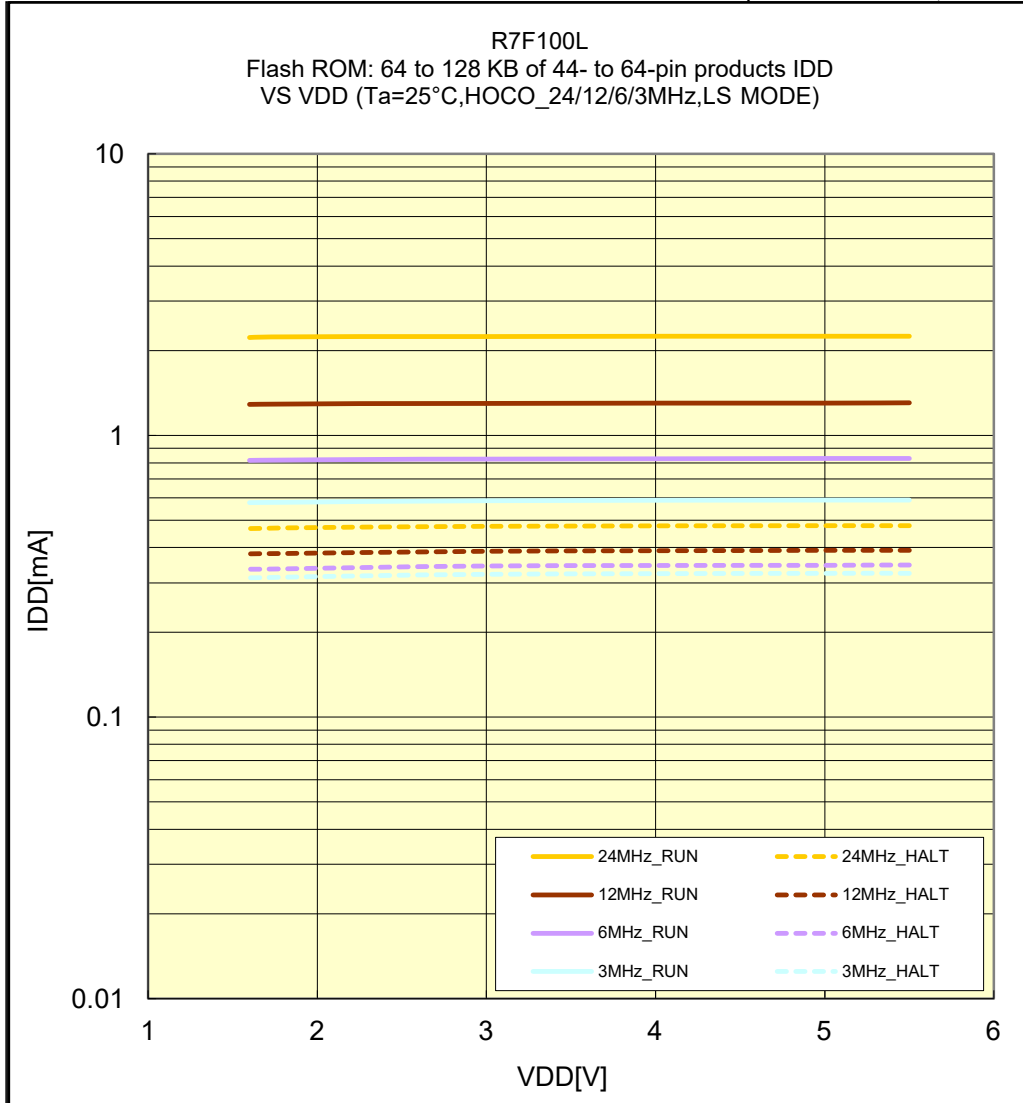


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/MOCO_4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

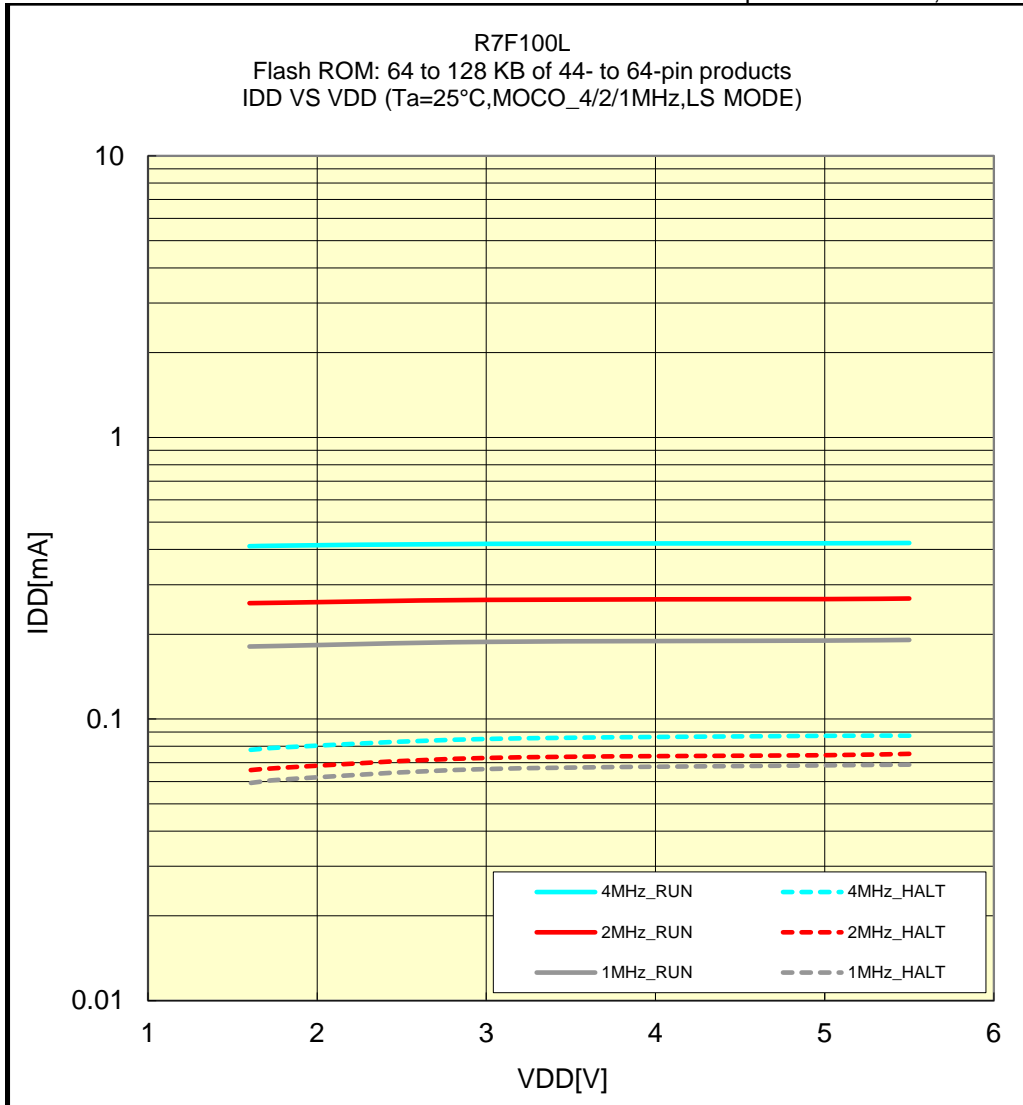


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/X'TAL/LS MODE)

Prepared on Jul. 7th, 2025

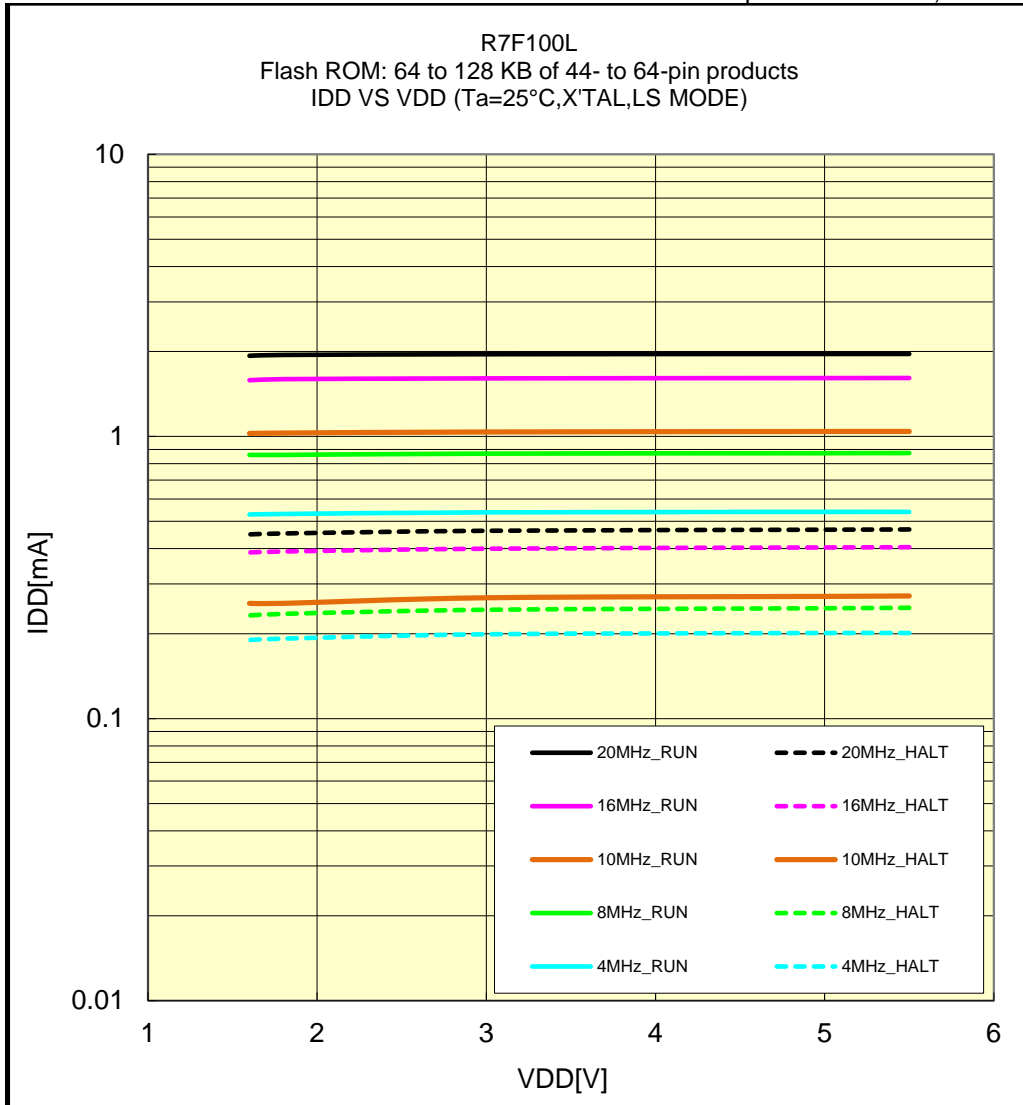


Remark 1MHz: 4MHz / 4 (MOSCDIV = 02H)
2MHz: 4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/HOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

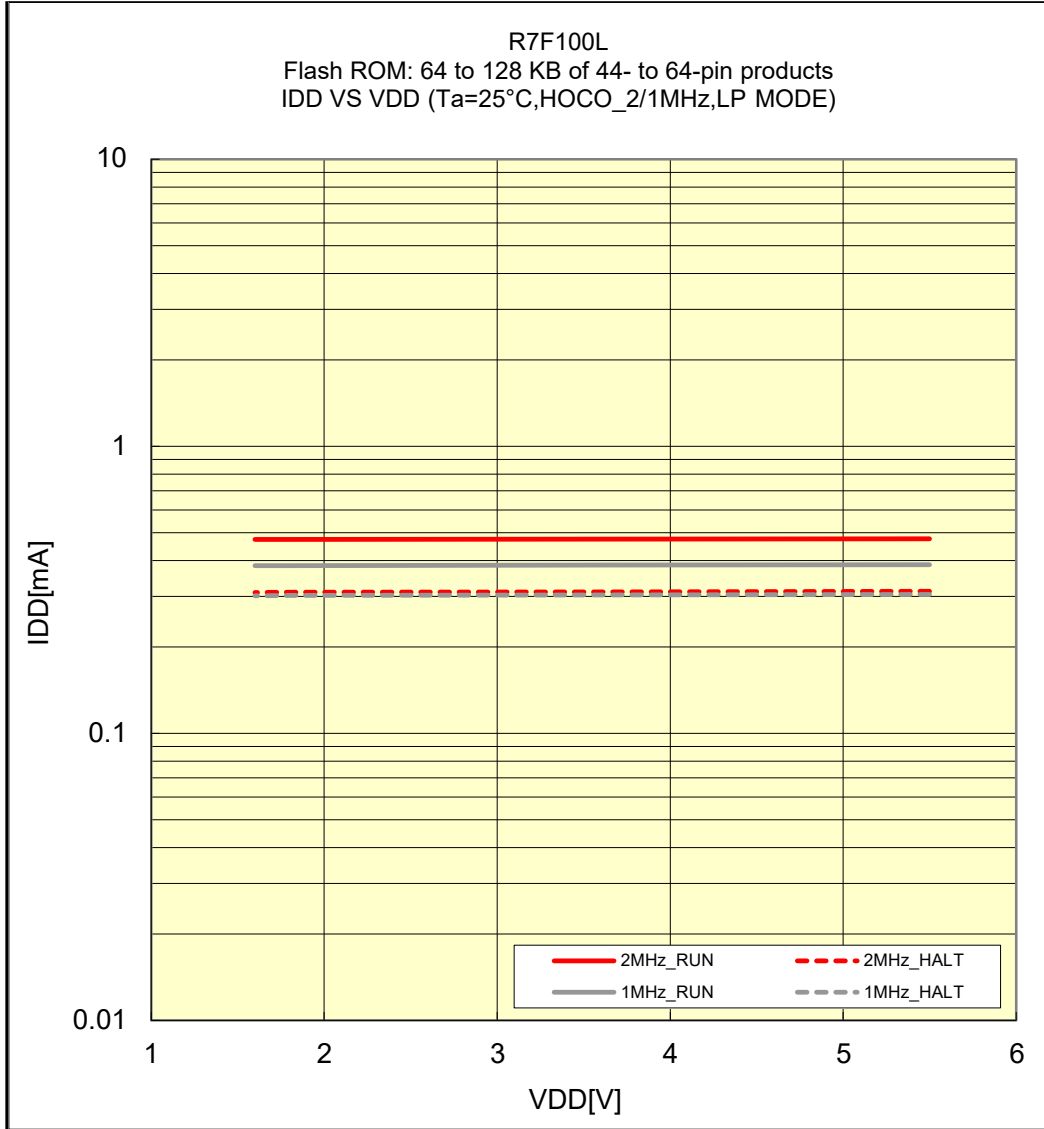


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/MOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

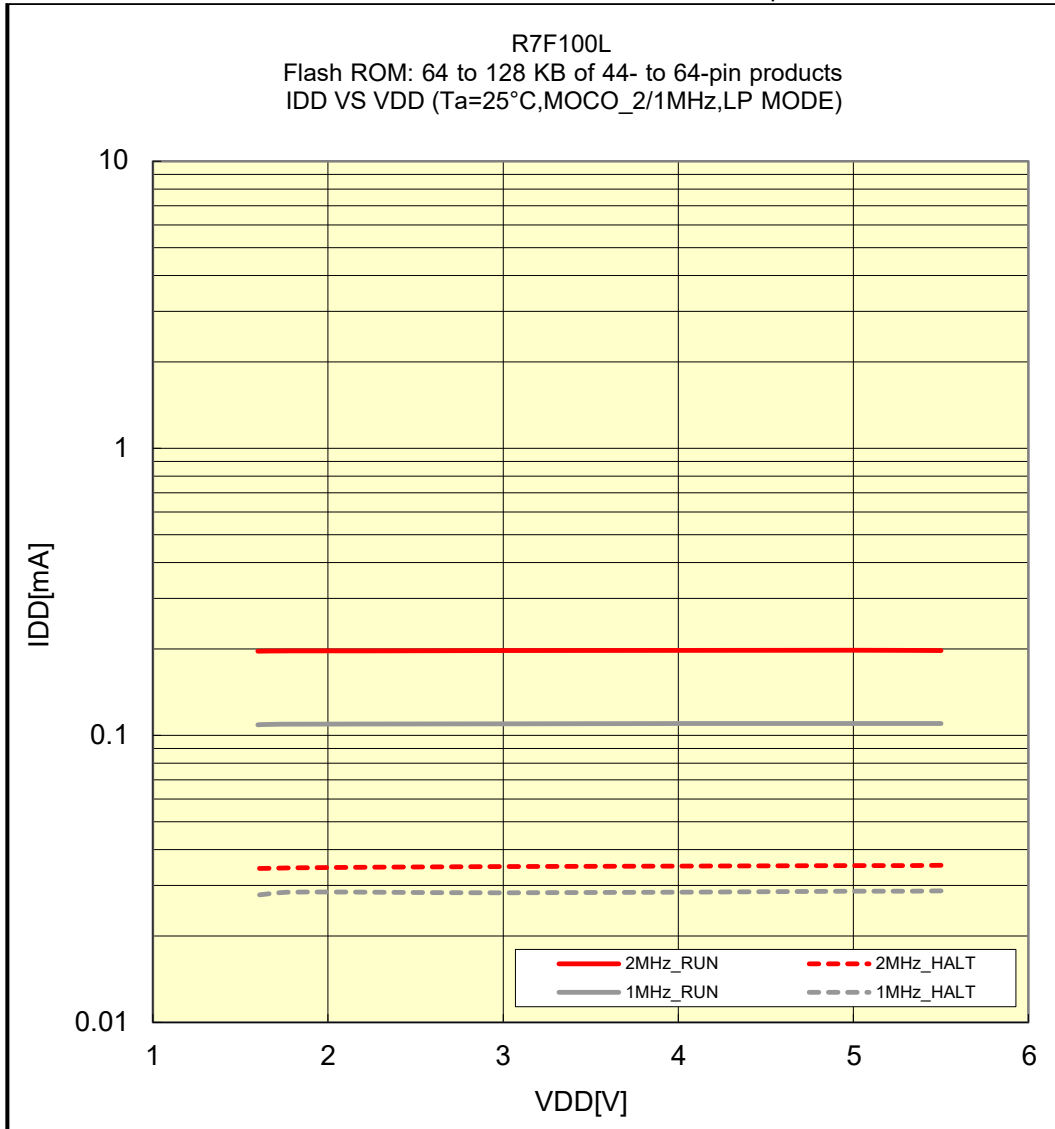


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/X'TAL/LP MODE)

Prepared on Jul. 7th, 2025

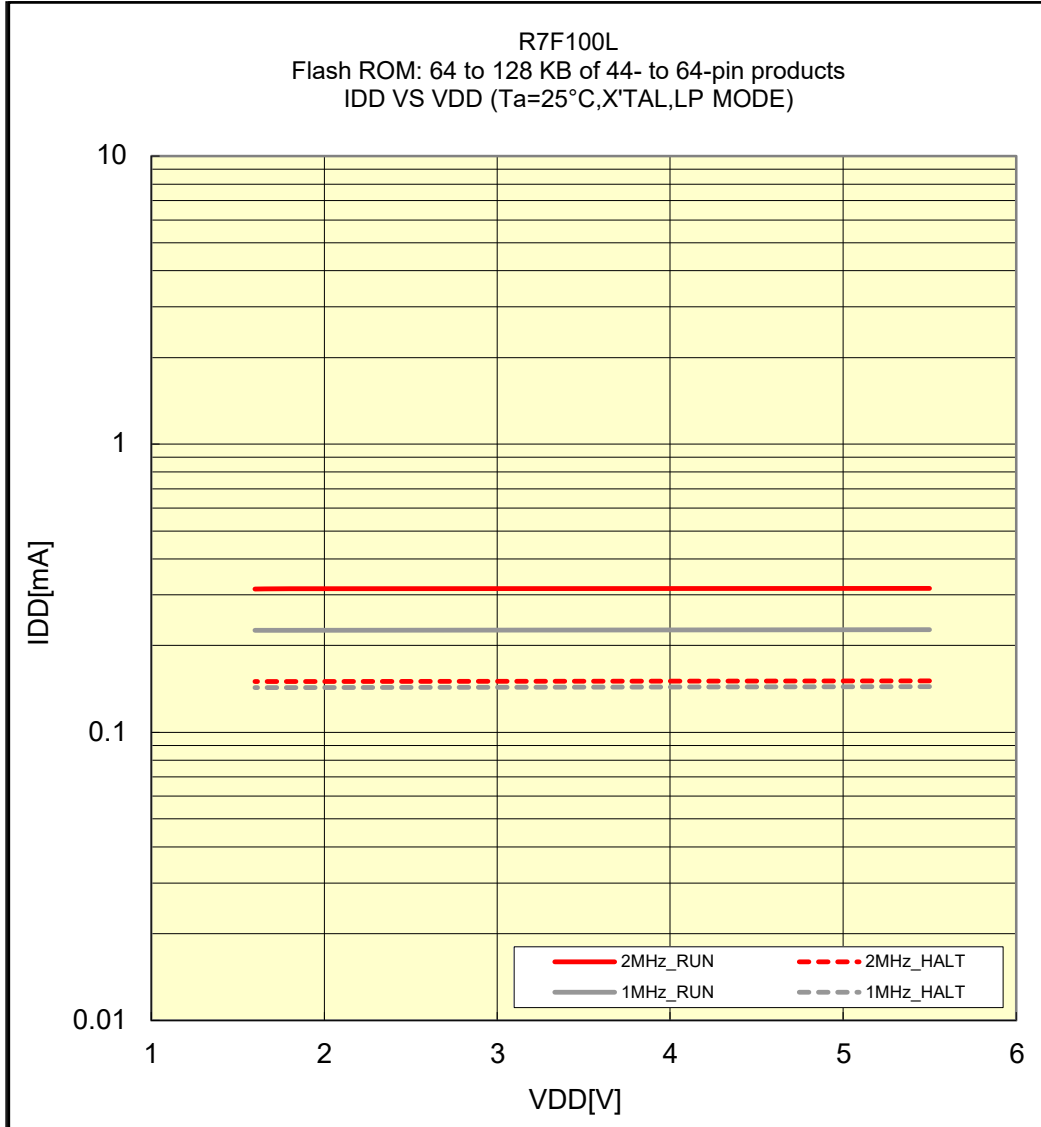


Remark 1MHz:4MHz / 4 (MOSCDIV = 02H)
2MHz:4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/LOCO/32.768KHz)

Prepared on Jul. 7th, 2025

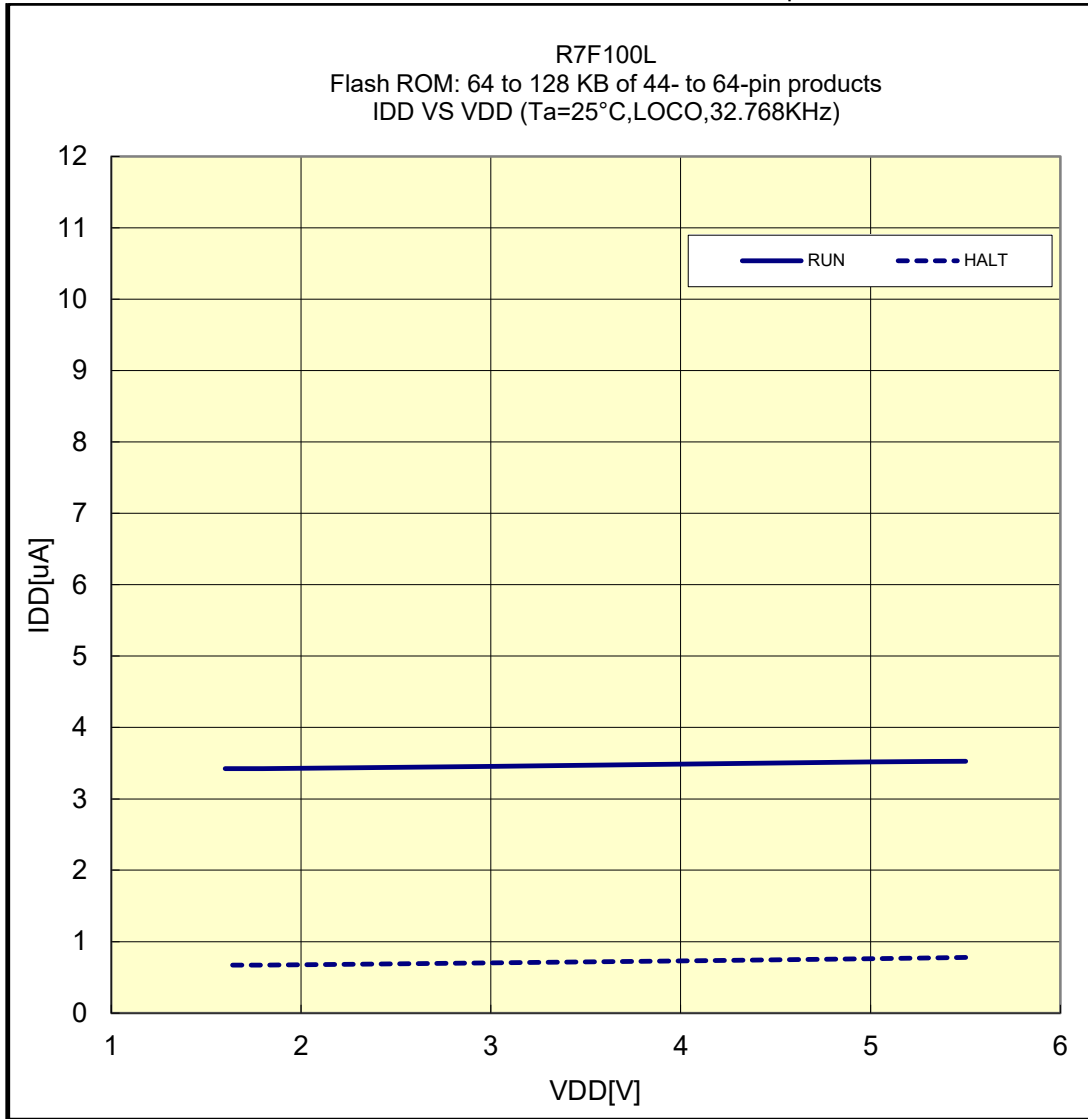


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(25°C/sub_clock/32.768KHz)

Prepared on Jul. 7th, 2025

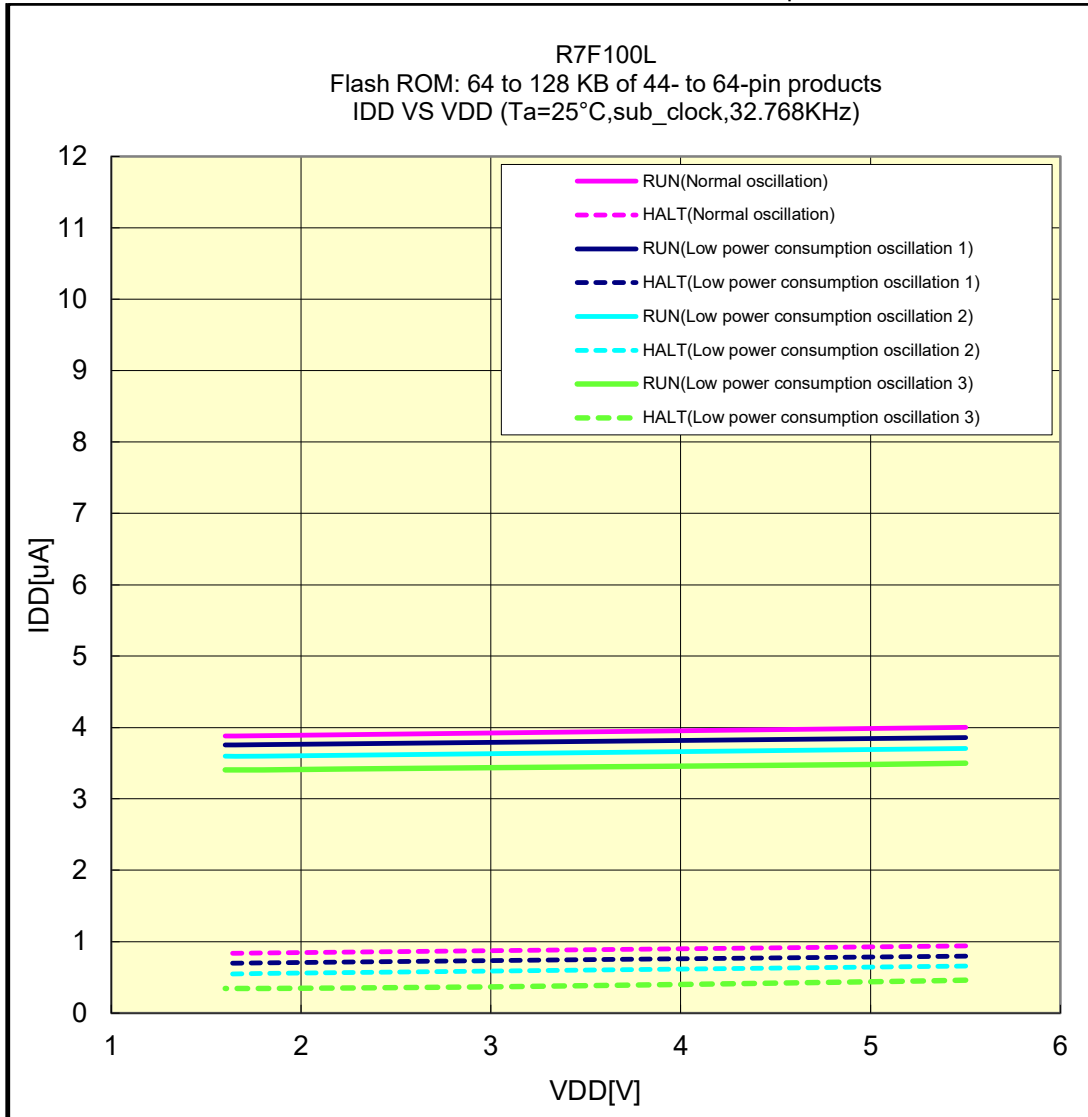


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/HOCO_32/24/16/8/4MHz/HS MODE)

Prepared on Jul. 7th, 2025

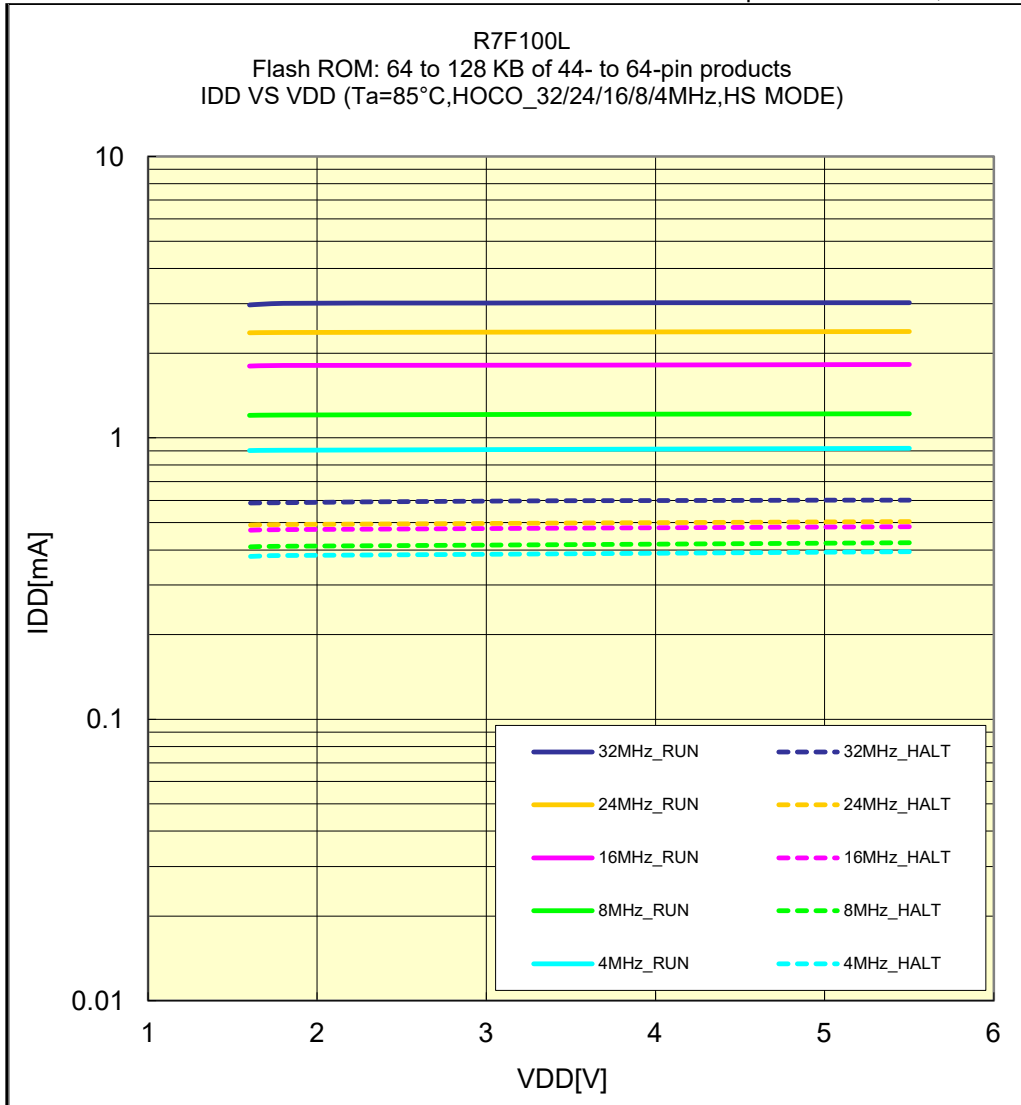


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/HOCO_16/8/4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

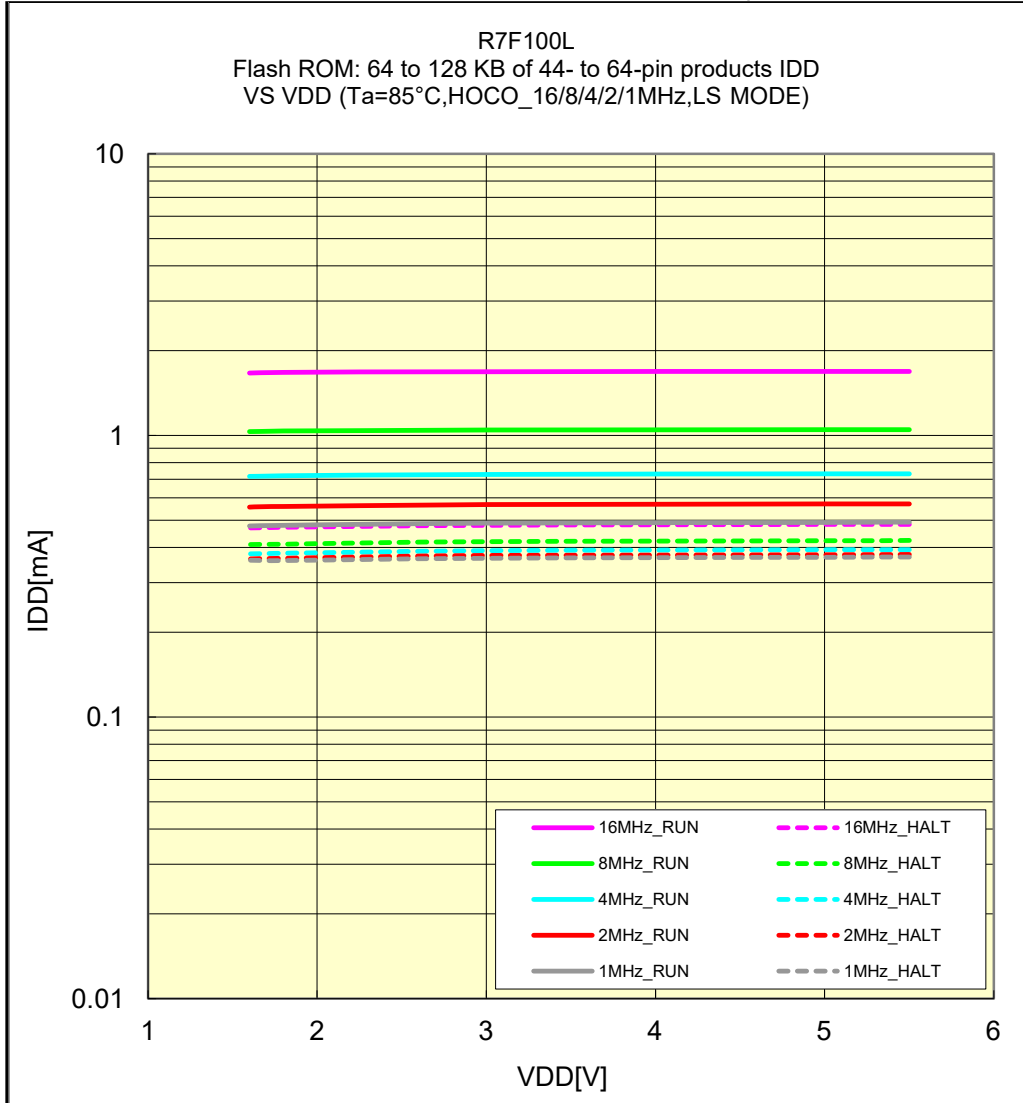


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/HOCO_24/12/6/3MHz/LS MODE)

Prepared on Mar. 7th, 2025

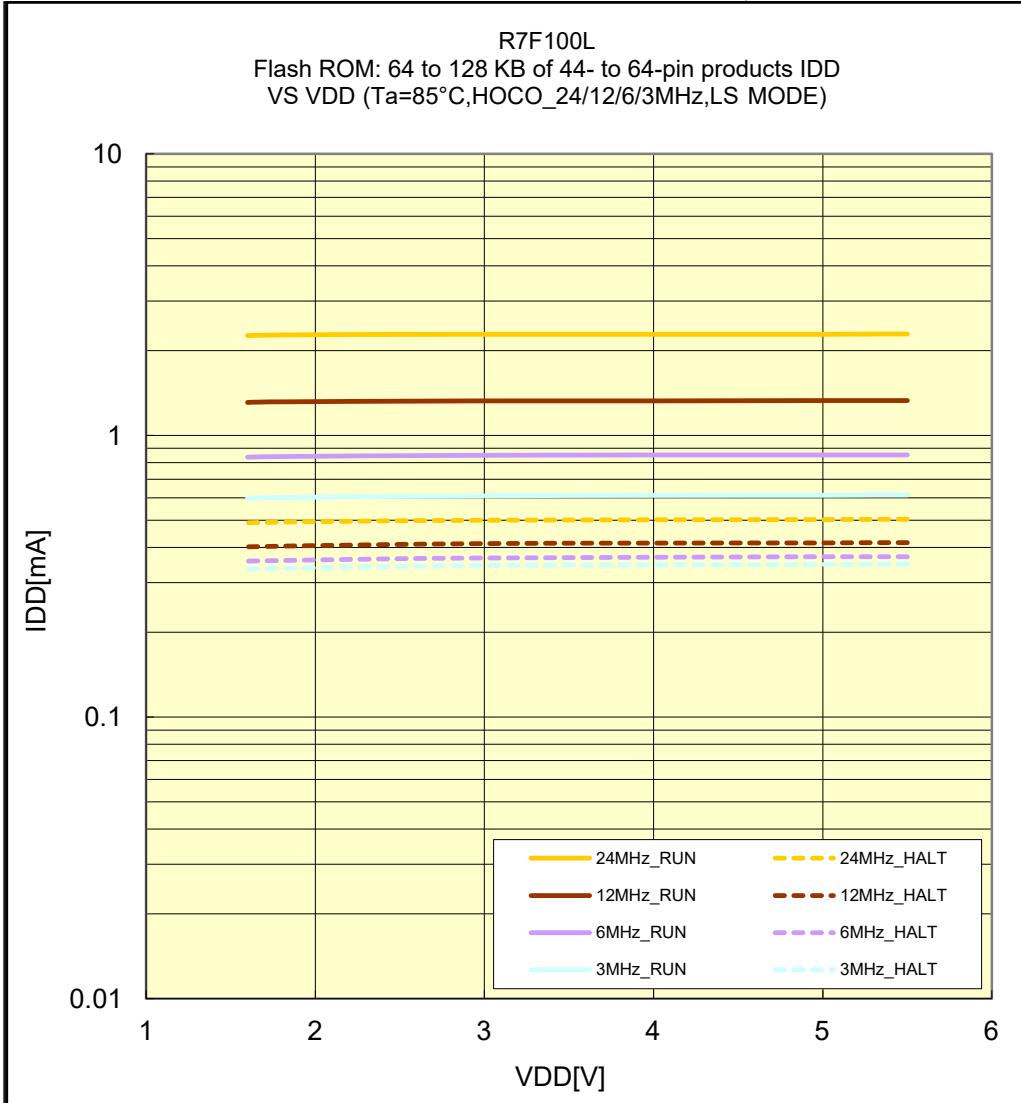


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/MOCO_4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

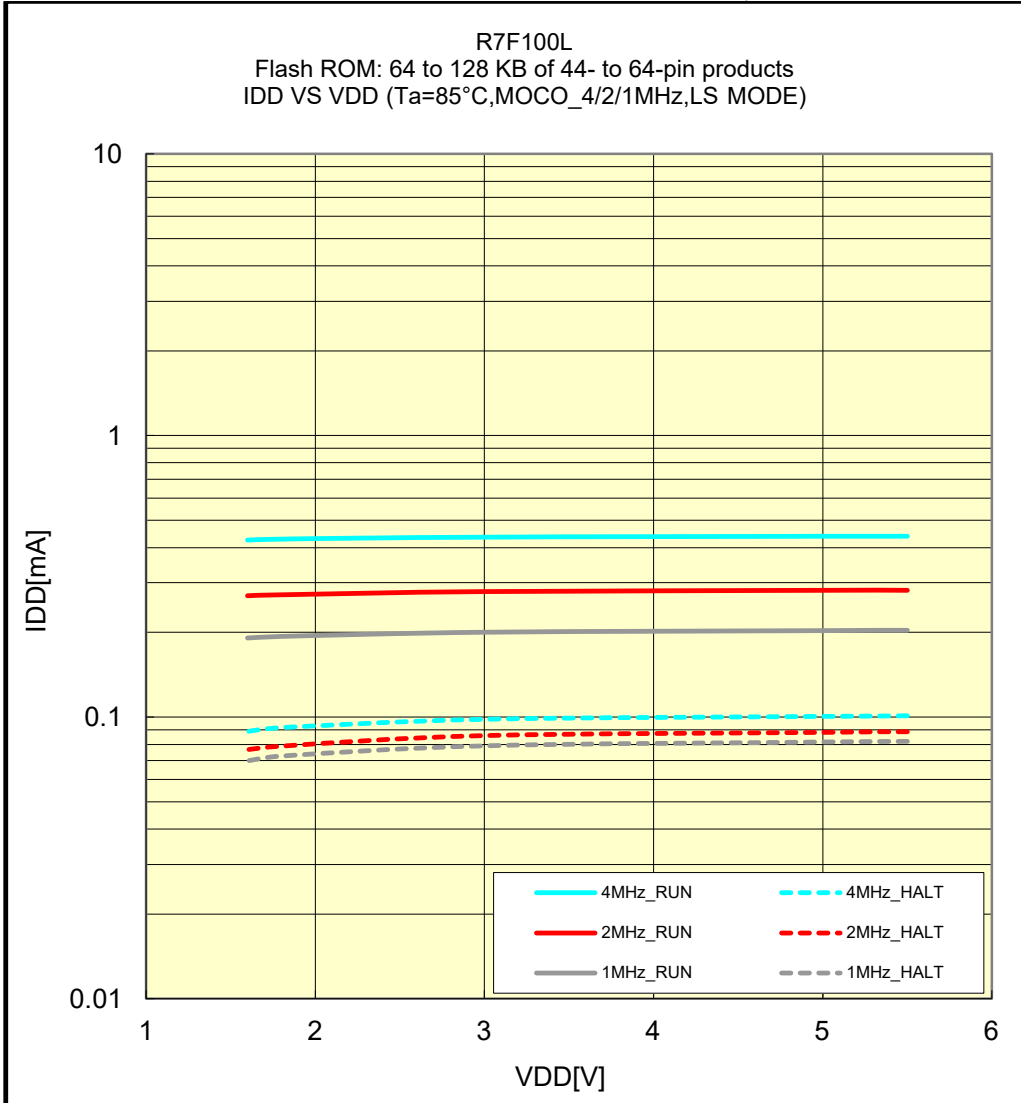


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/X'TAL/LS MODE)

Prepared on Jul. 7th, 2025

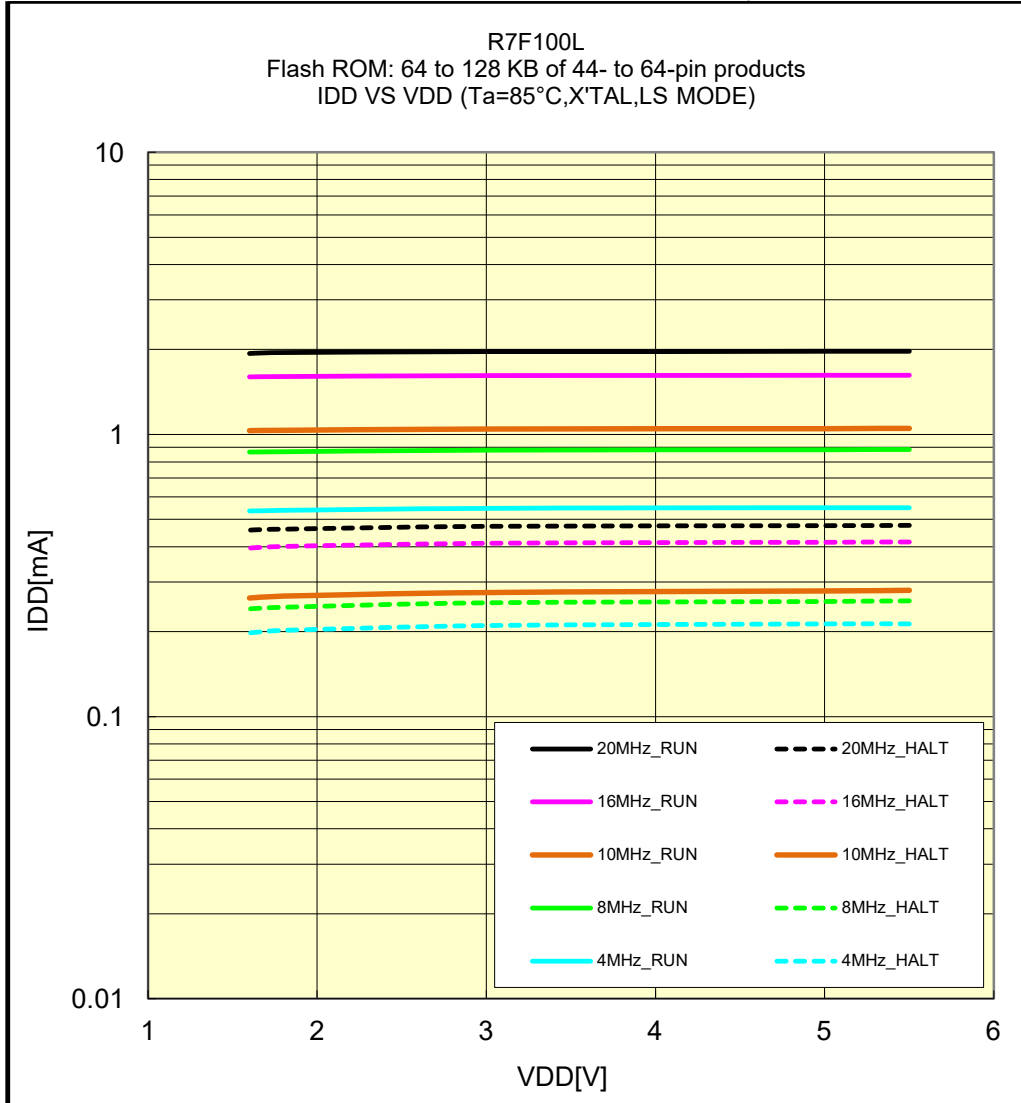


Remark 1MHz: 4MHz / 4 (MOSCDIV = 02H)
2MHz: 4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/HOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

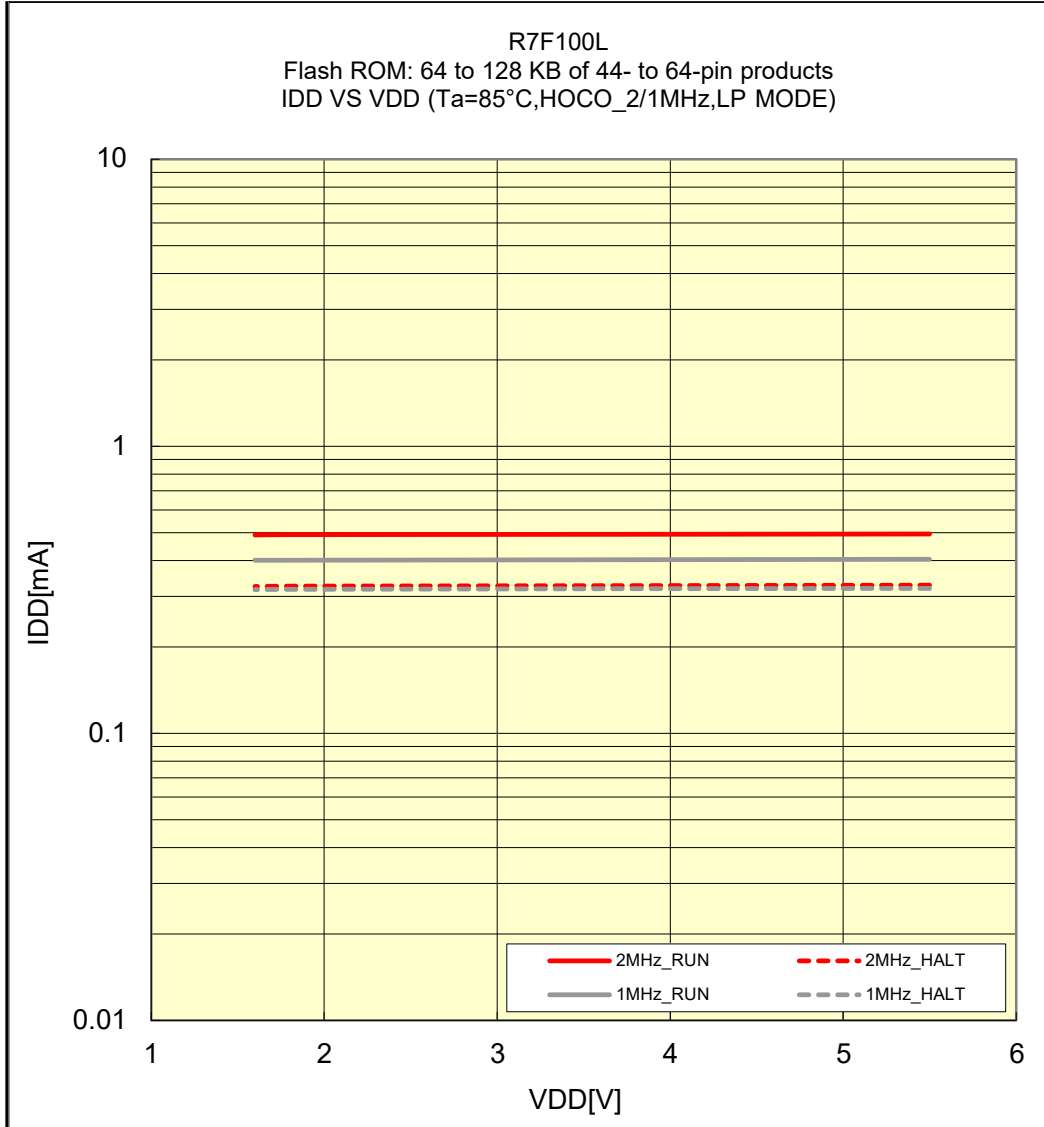


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/MOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

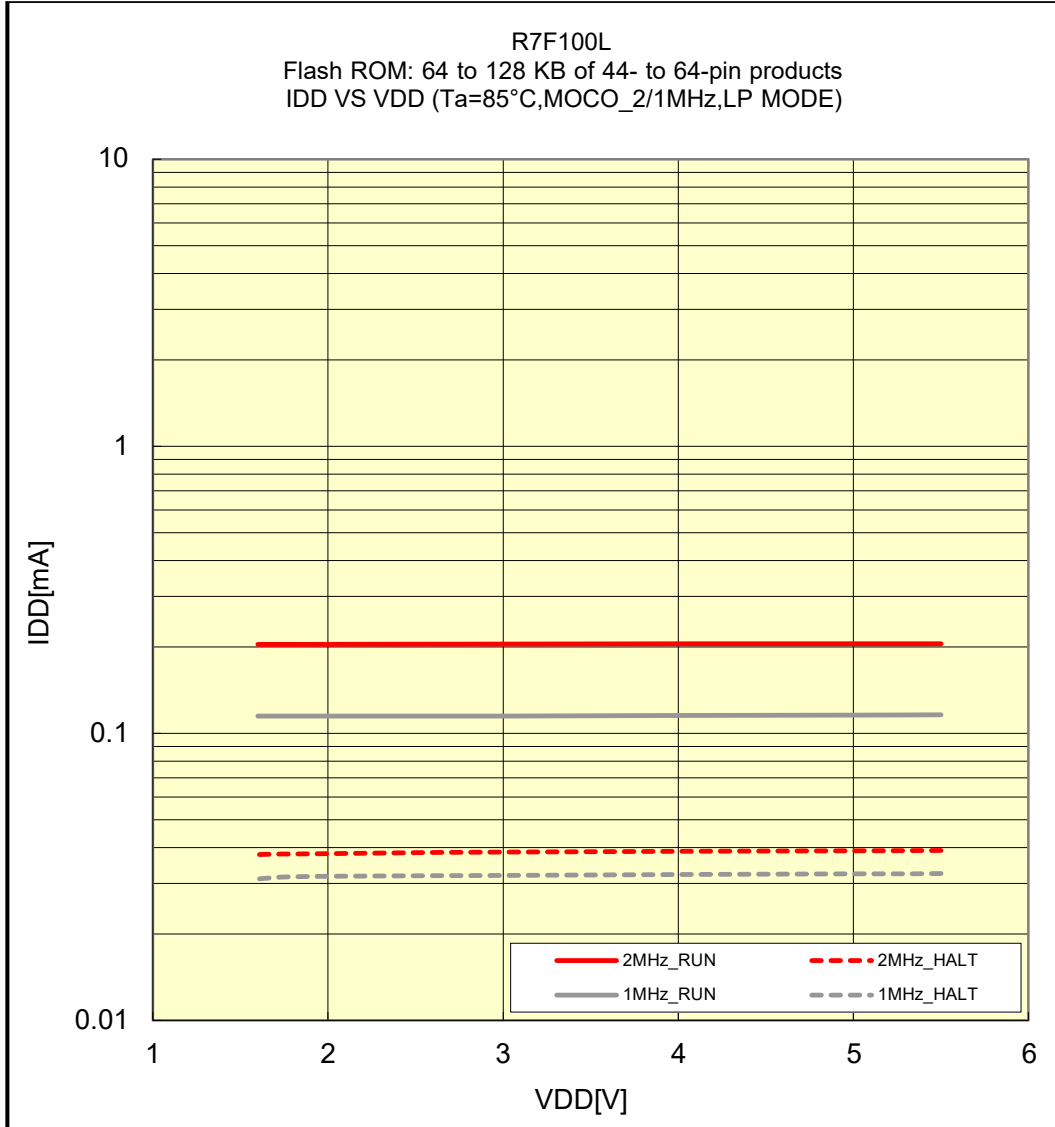


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/X'TAL/LP MODE)

Prepared on Jul. 7th, 2025

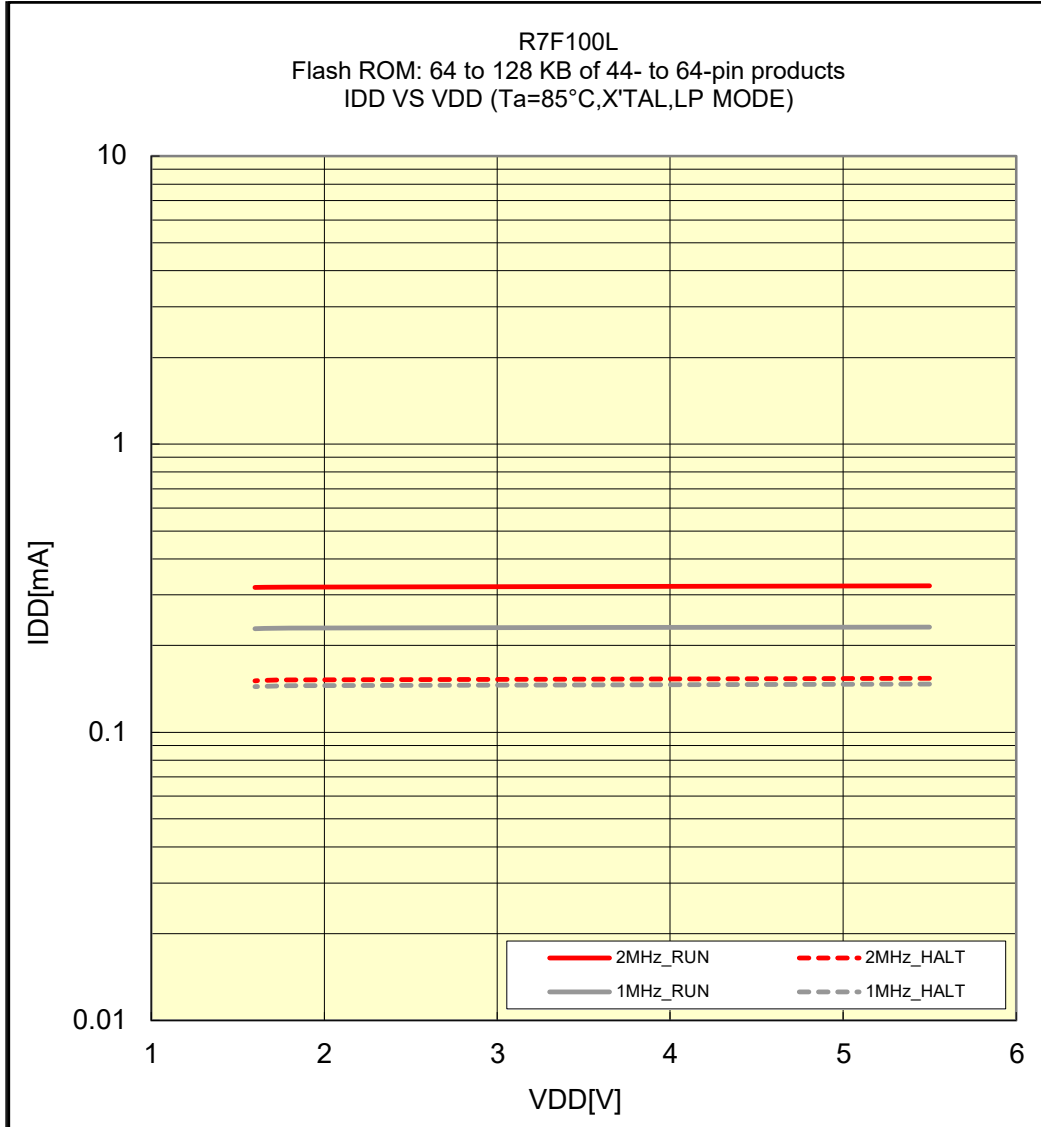


Remark 1MHz:4MHz / 4 (MOSCDIV = 02H)
2MHz:4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/LOCO/32.768KHz)

Prepared on Jul. 7th, 2025

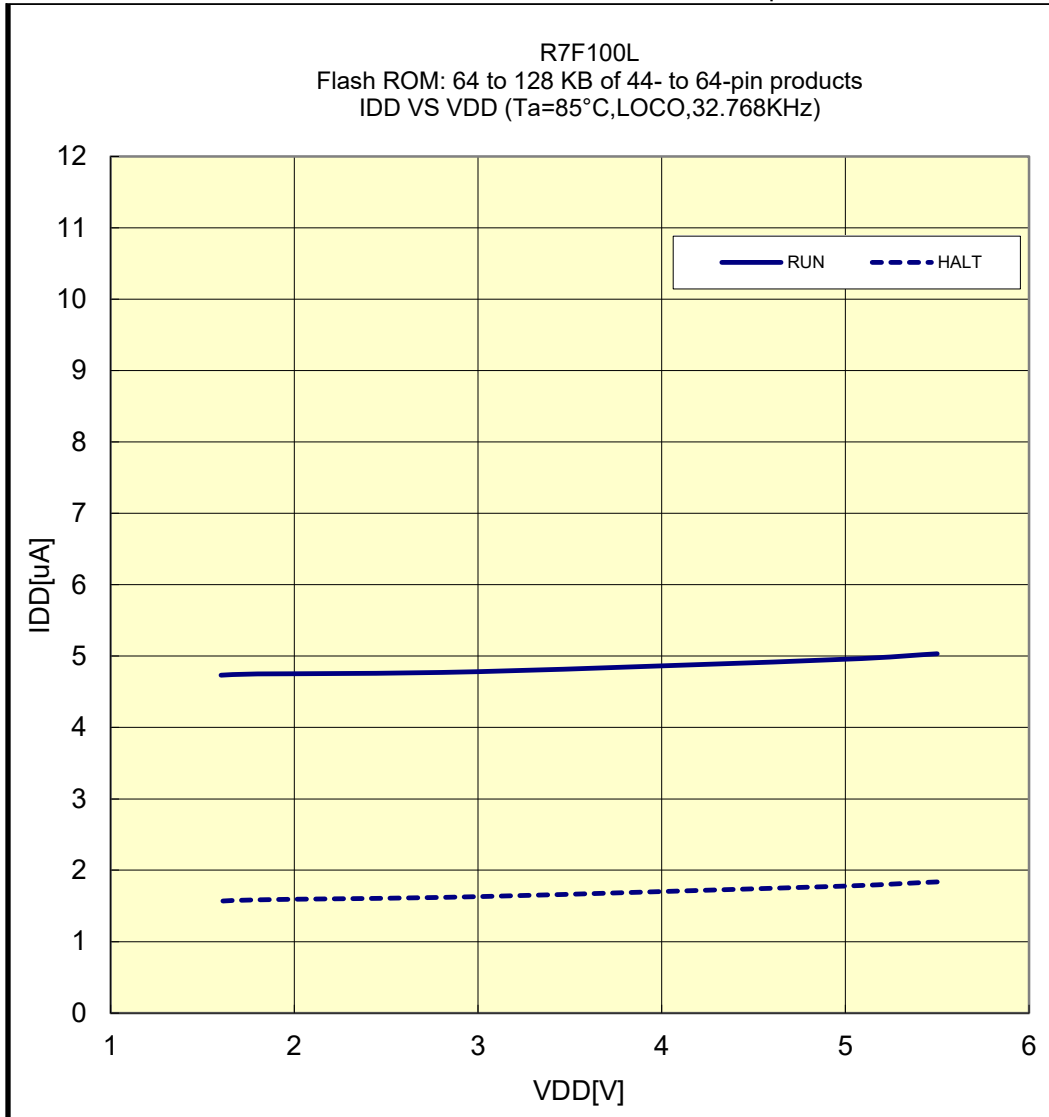


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(85°C/sub_clock/32.768KHz)

Prepared on Jul. 7th, 2025

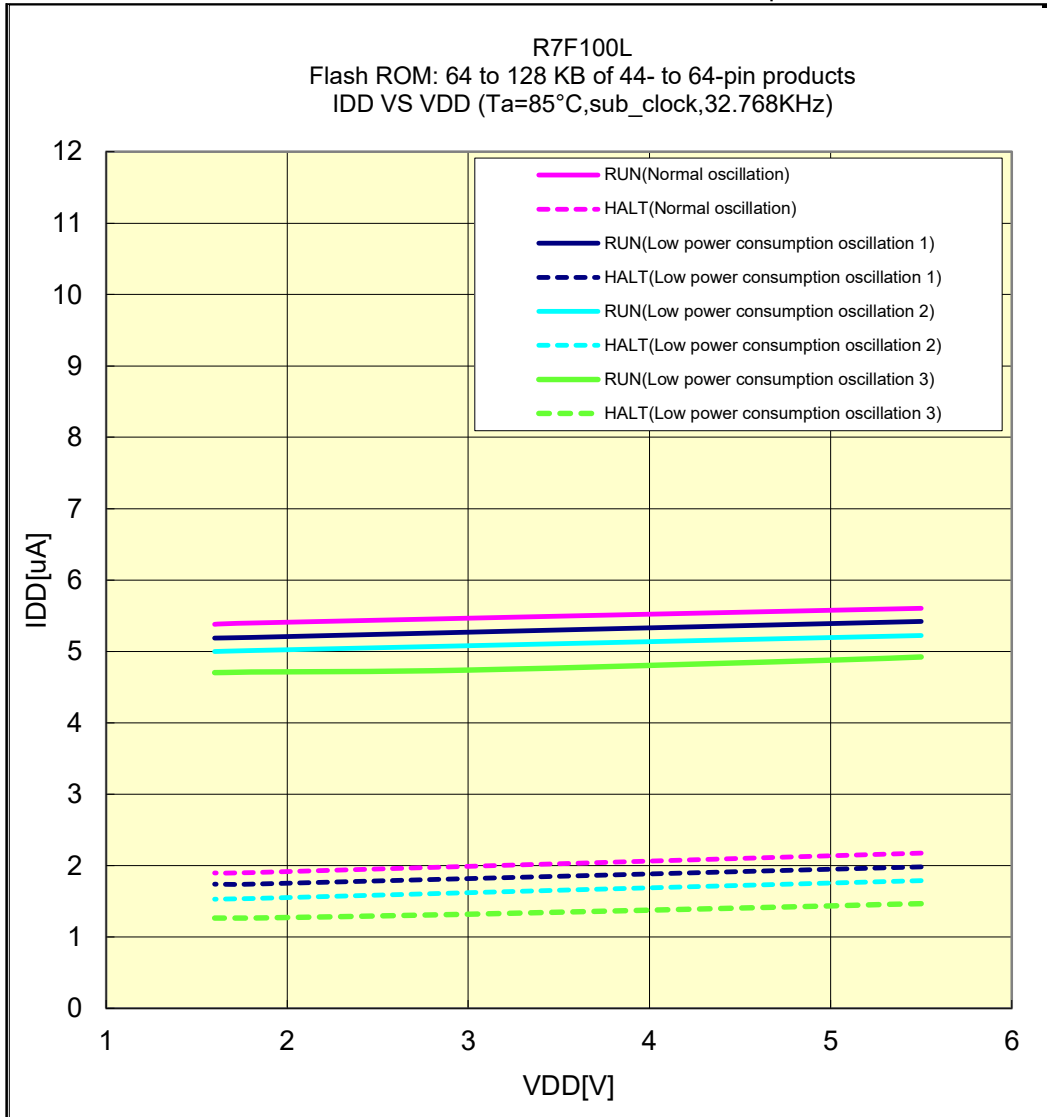


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/HOCO_32/24/16/8/4MHz/HS MODE)

Prepared on Jul. 7th, 2025

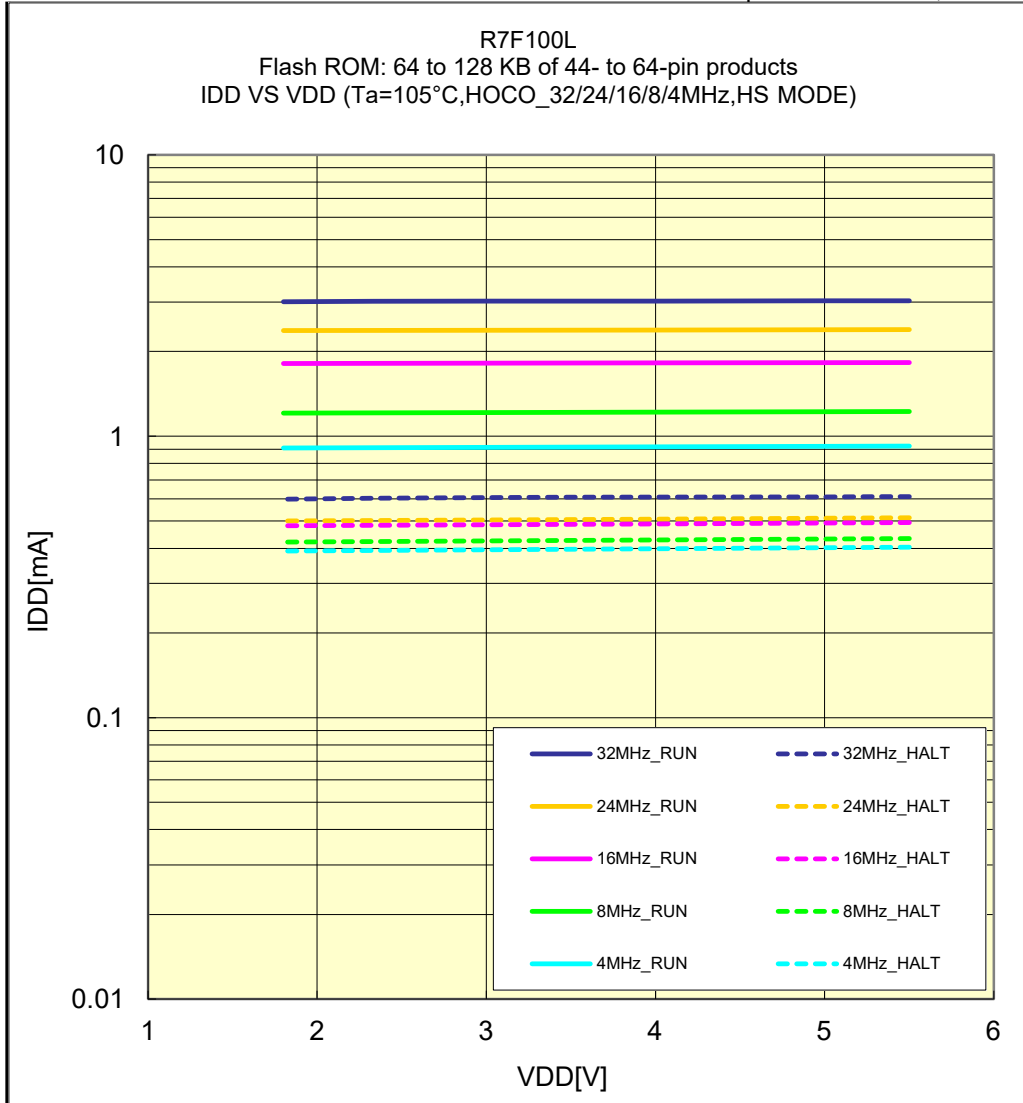


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/HOCO_16/8/4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

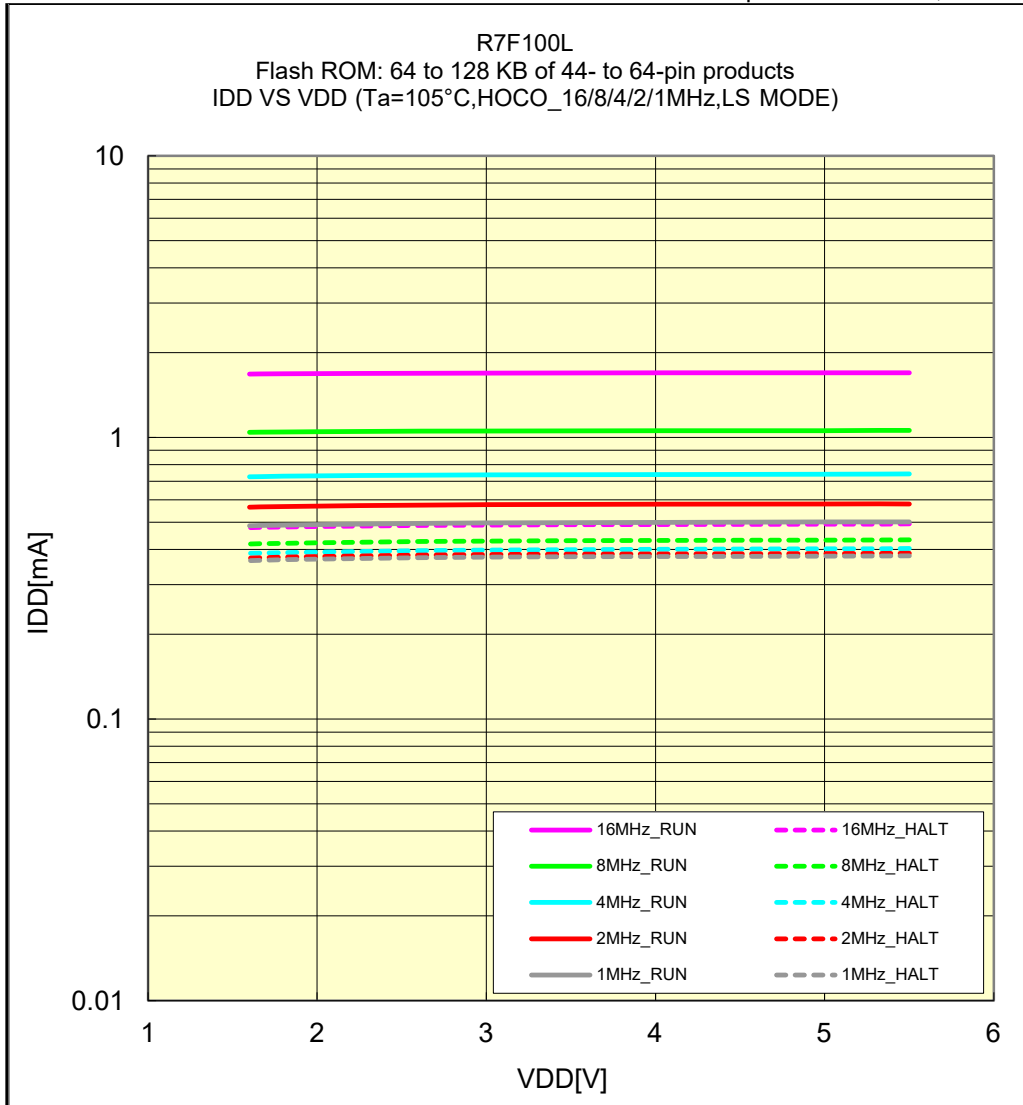


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/HOCO_24/12/6/3MHz/LS MODE)

Prepared on Jul. 7th, 2025

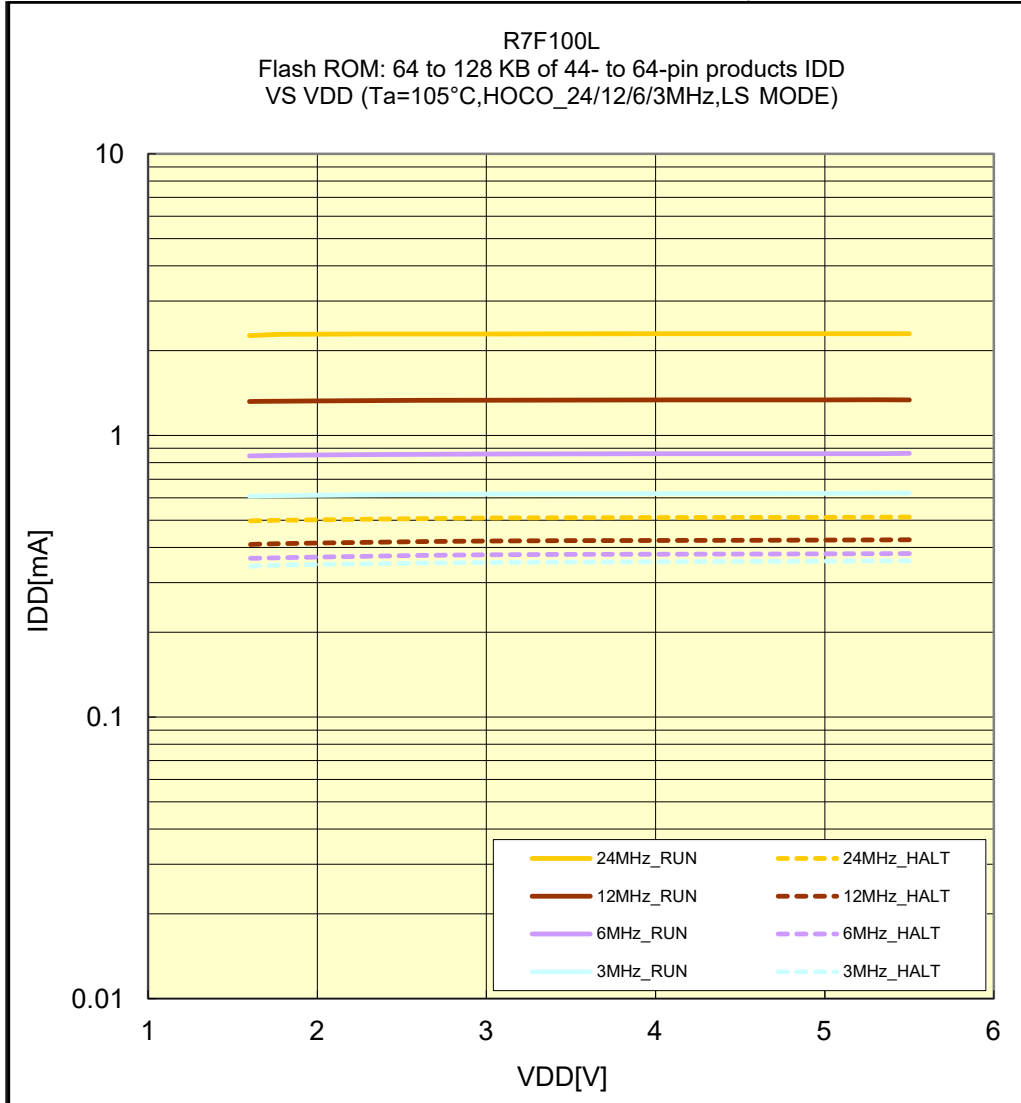


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L

Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/MOCO_4/2/1MHz/LS MODE)

Prepared on Jul. 7th, 2025

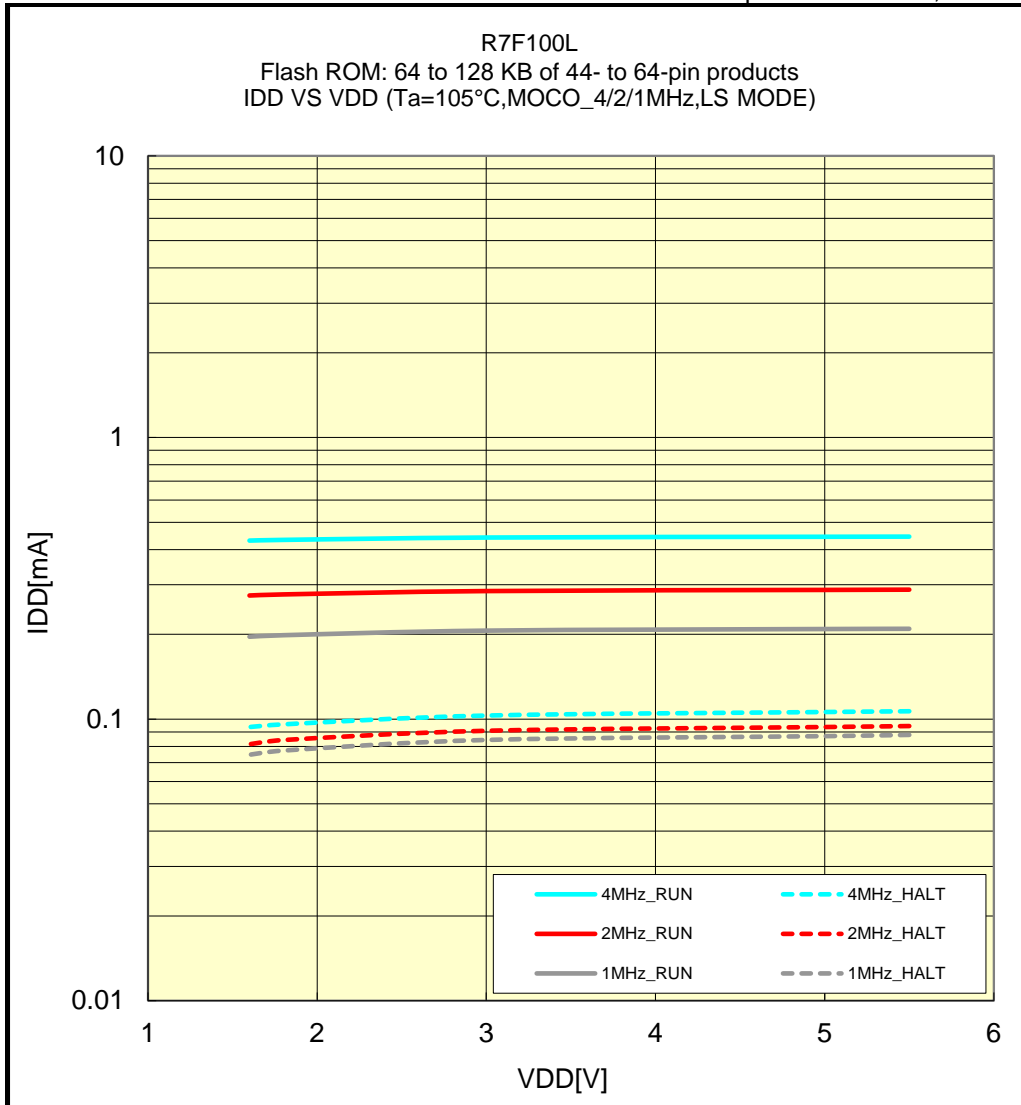


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/X'TAL/LS MODE)

Prepared on Jul. 7th, 2025

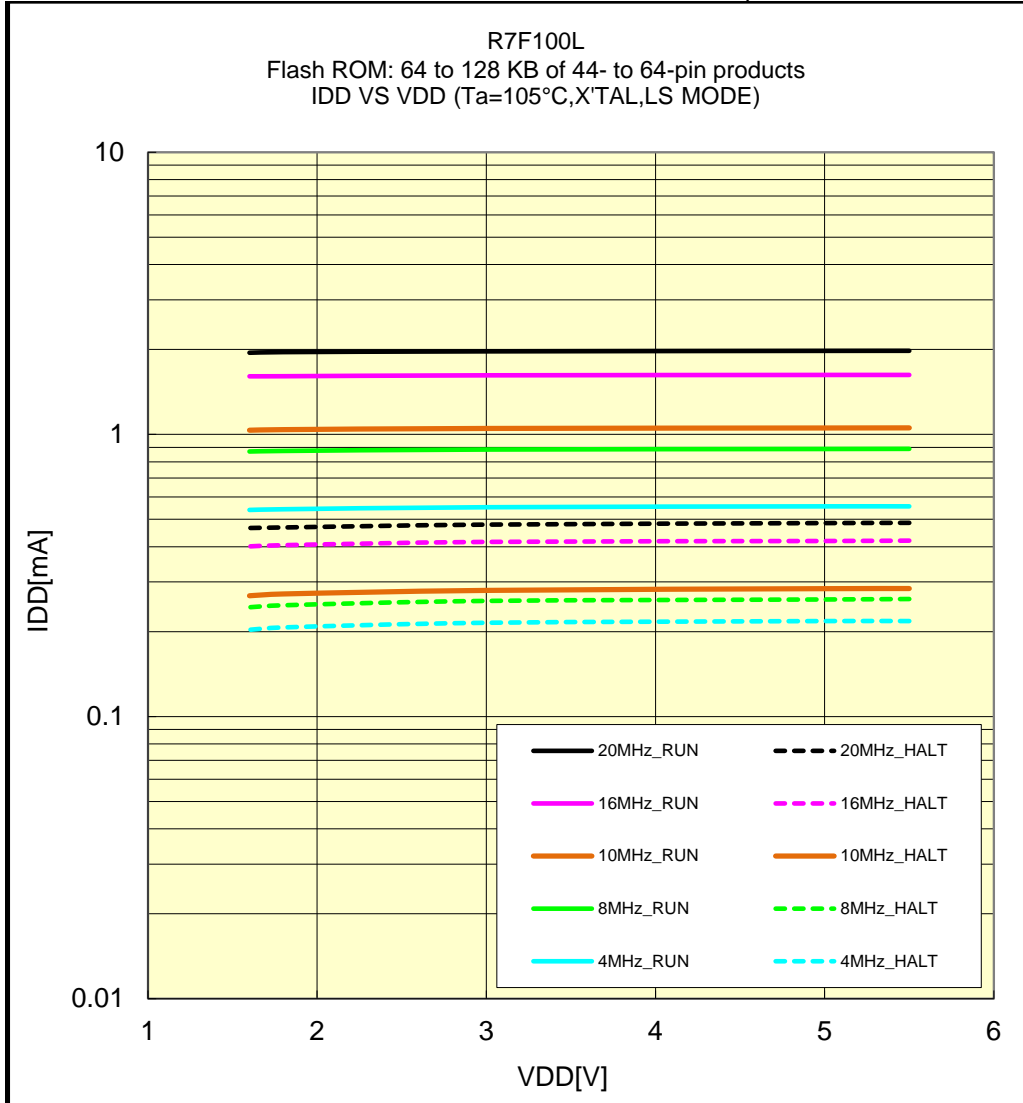


Remark 1MHz: 4MHz / 4 (MOSCDIV = 02H)
2MHz: 4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/HOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

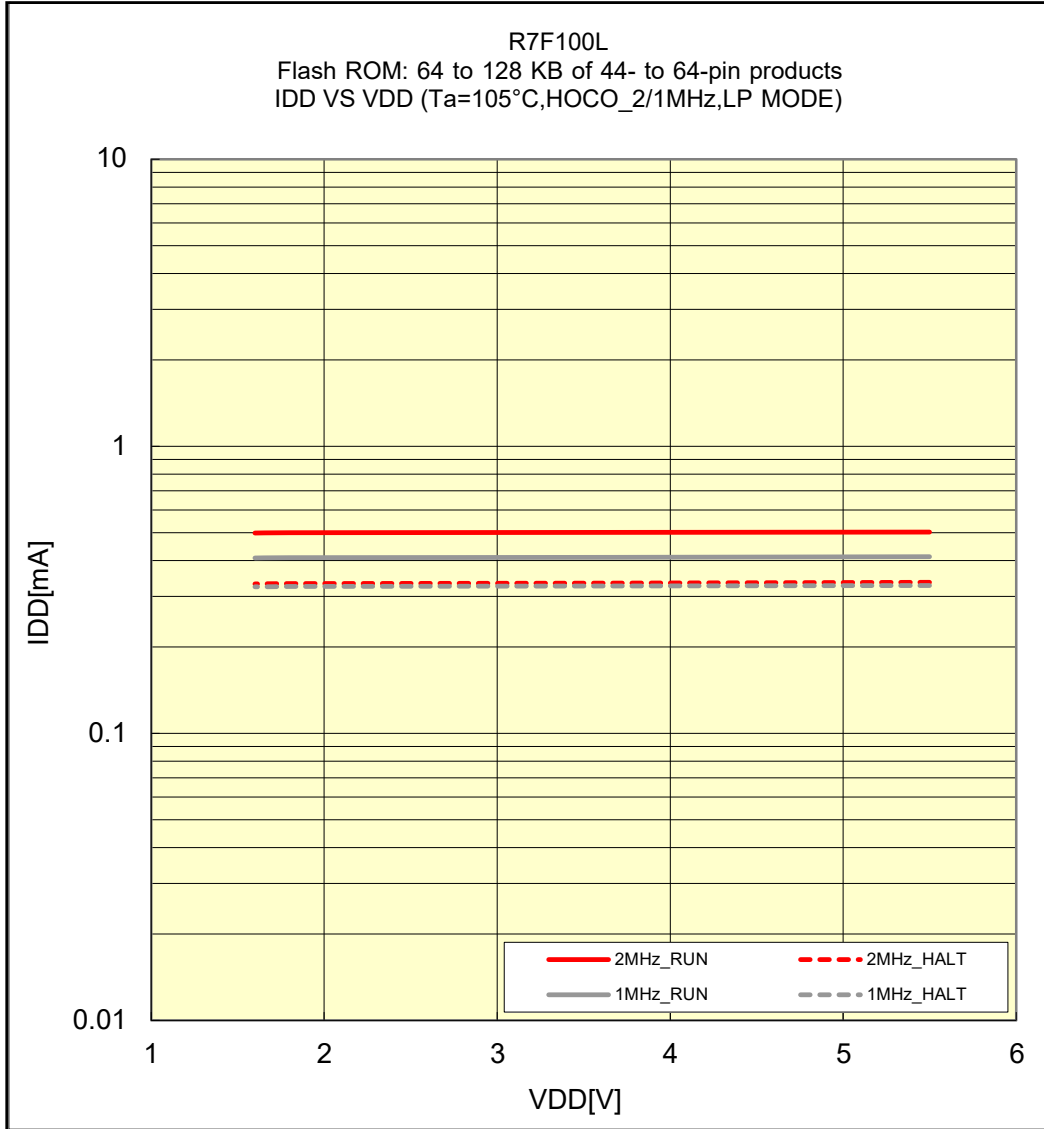


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/MOCO_2/1MHz/LP MODE)

Prepared on Jul. 7th, 2025

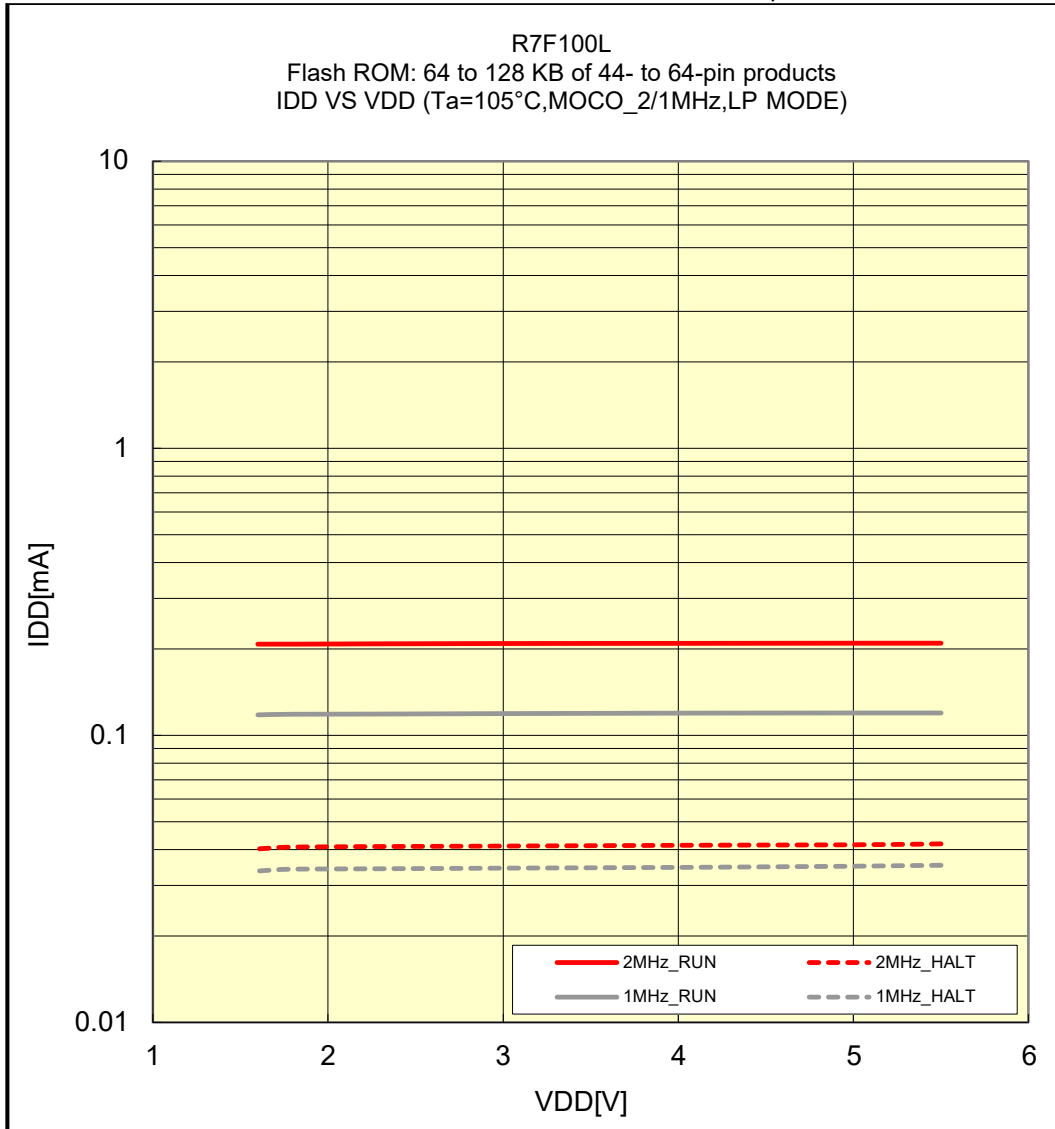


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/X'TAL/LP MODE)

Prepared on Jul. 7th, 2025

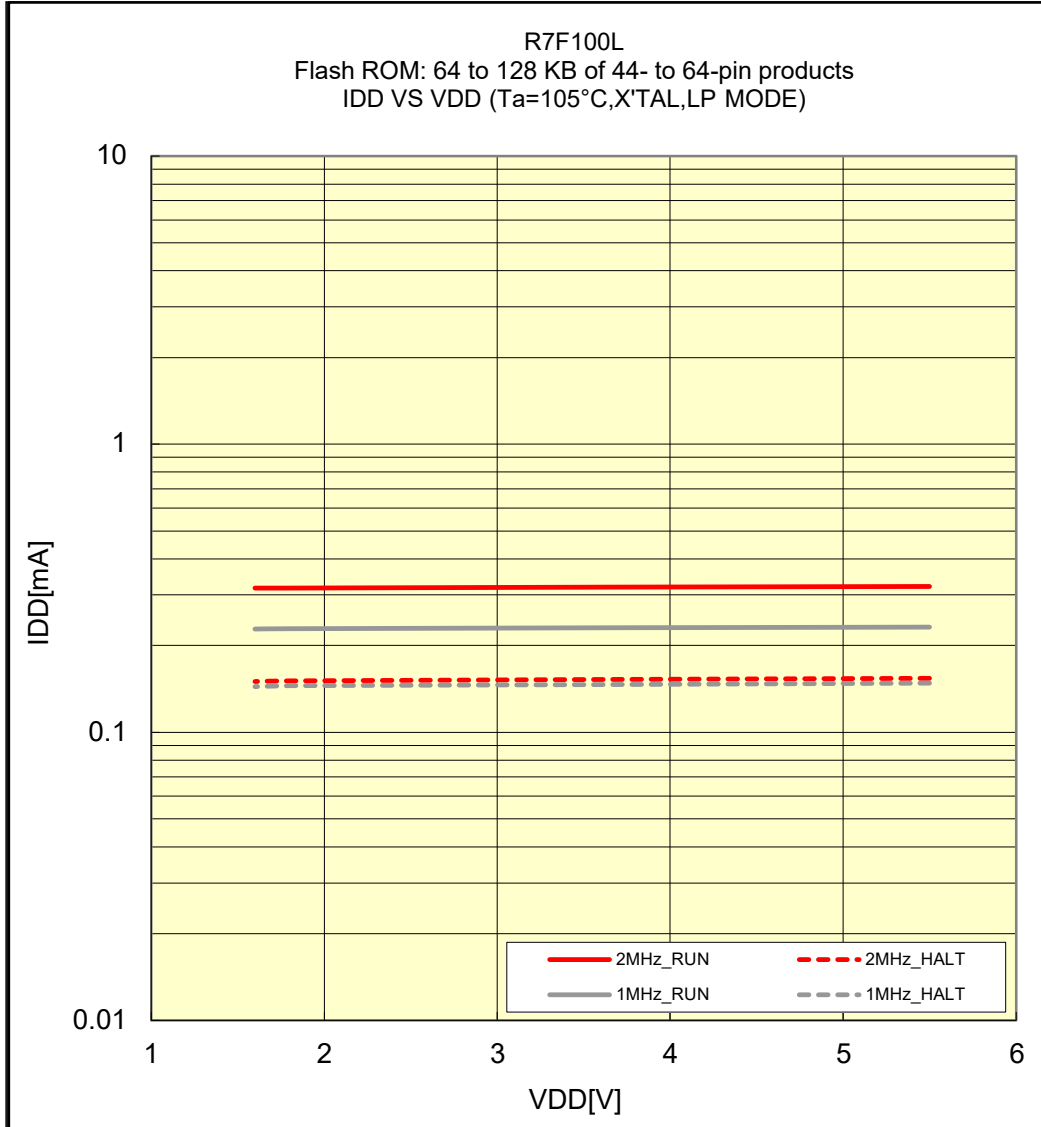


Remark 1MHz:4MHz / 4 (MOSCDIV = 02H)
2MHz:4MHz / 2 (MOSCDIV = 01H)

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/LOCO/32.768KHz)

Prepared on Jul. 7th, 2025

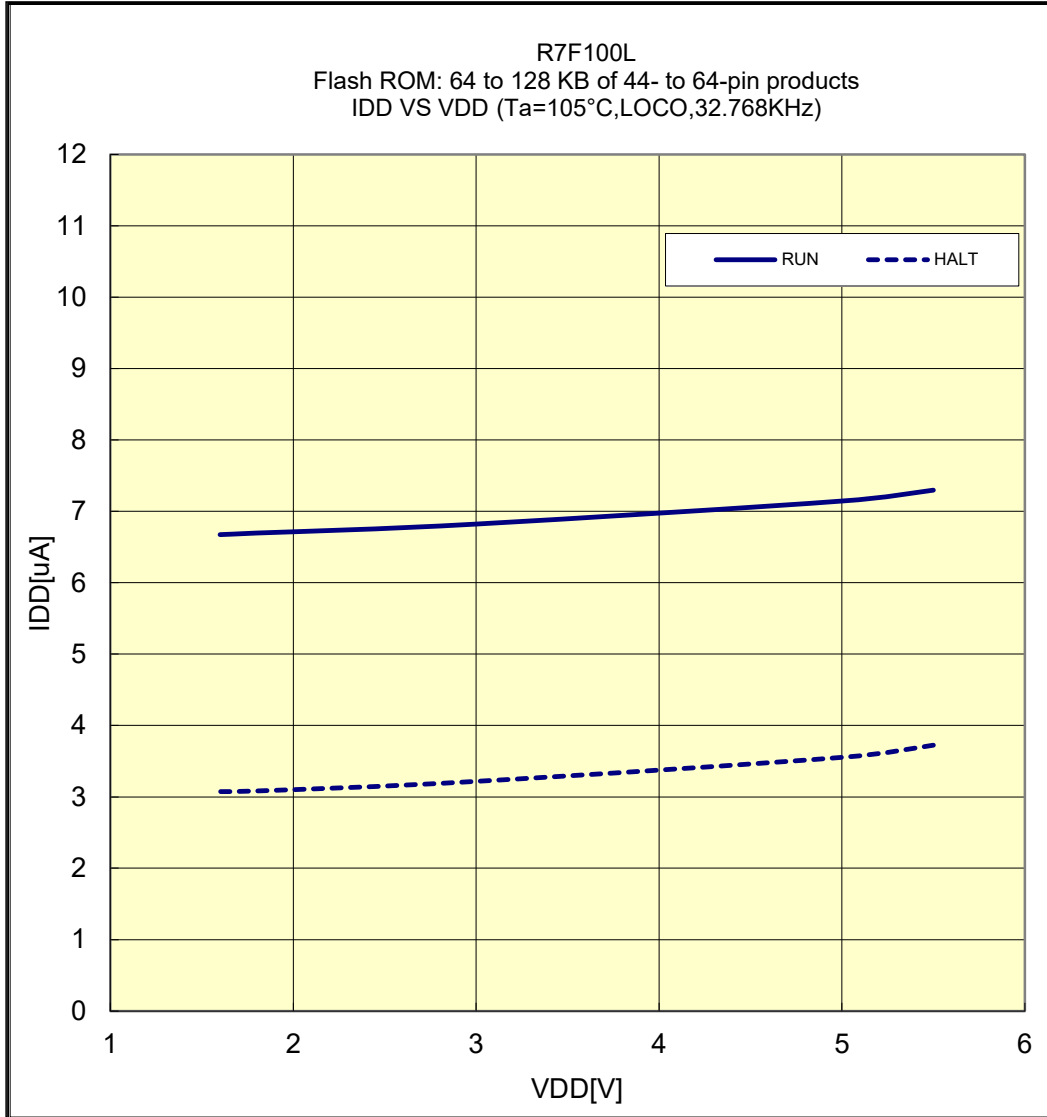


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(105°C/sub_clock/32.768KHz)

Prepared on Jul. 7th, 2025

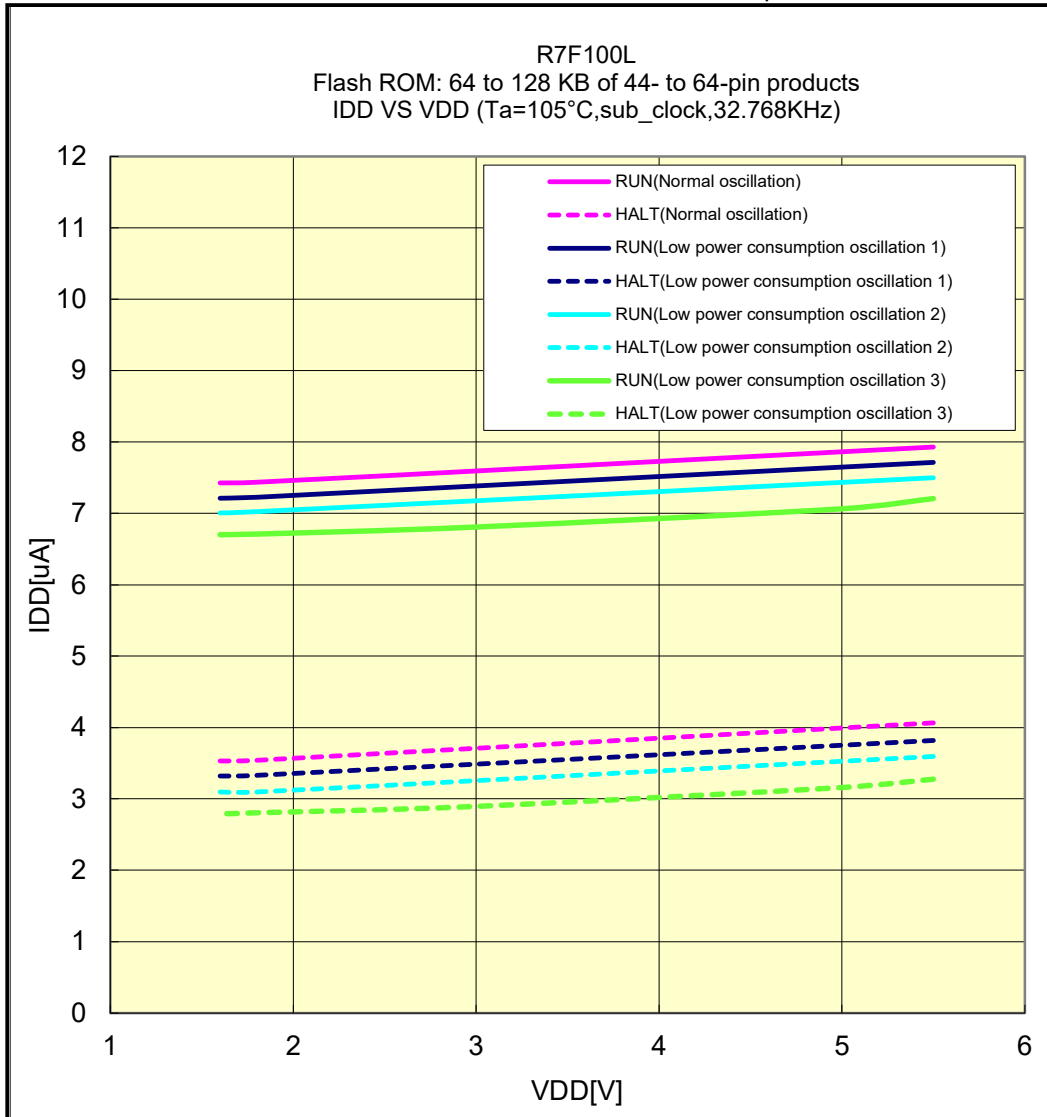


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS VDD(STOP MODE)

Prepared on Jul. 7th, 2025

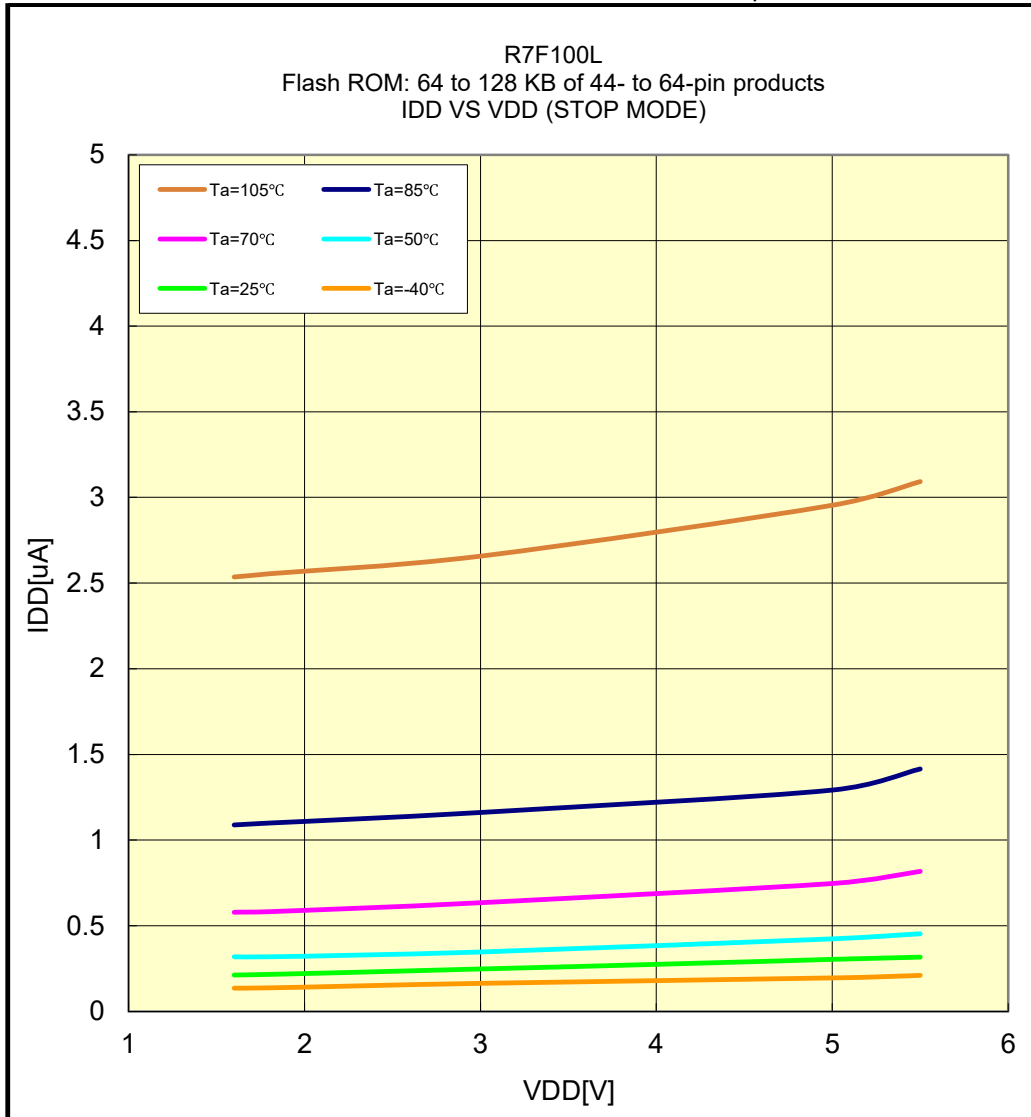


The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.

R7F100L
Flash ROM: 64 to 128 KB of 44- to 64-pin products

IDD VS Ta(STOP MODE)

Prepared on Jul. 7th, 2025

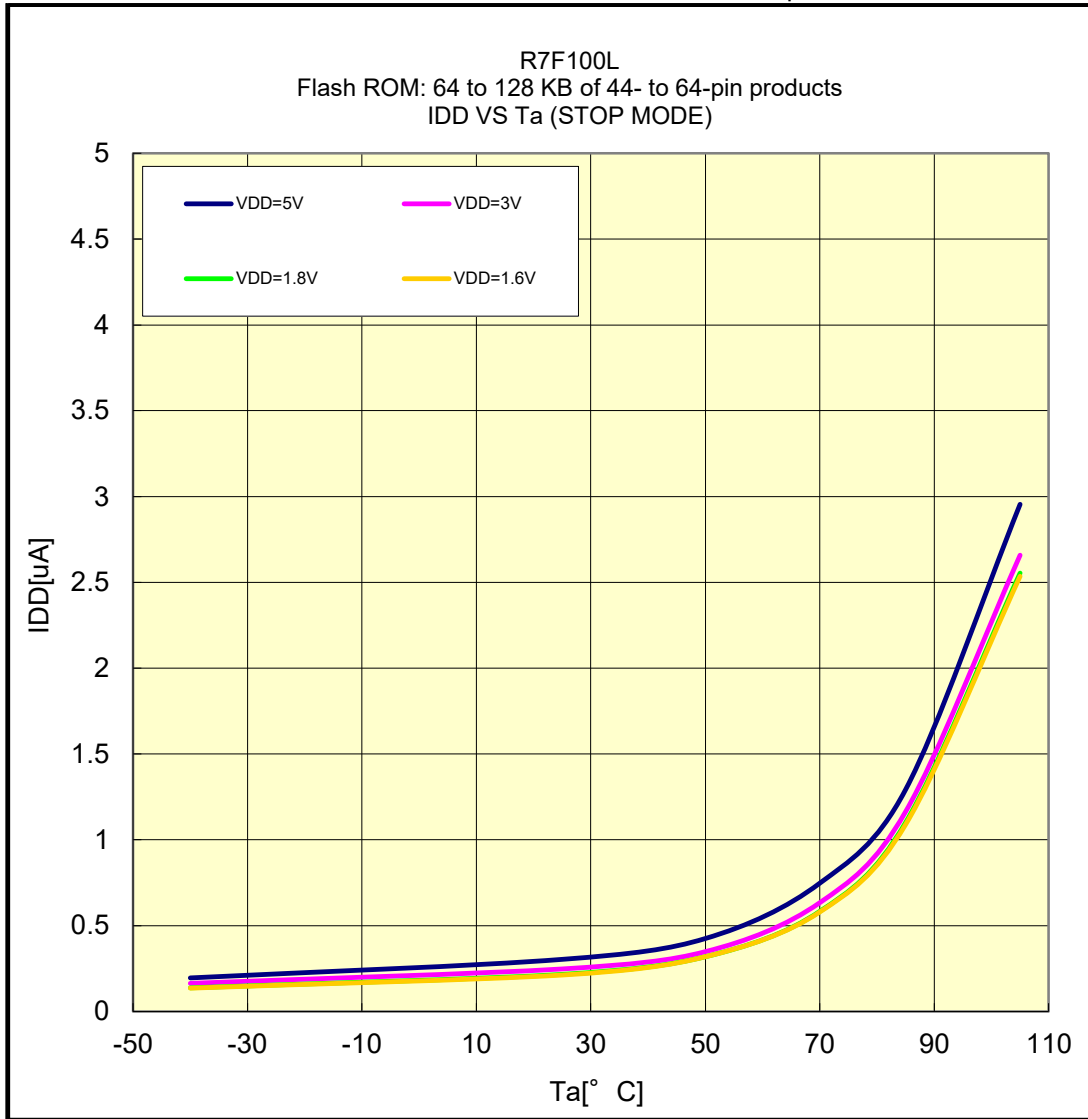

The above mentioned value is only for your reference. The value was measured under certain conditions and does not guarantee the product's characteristics.