





SW1 D3  
469-18-C  
**RENESAS**





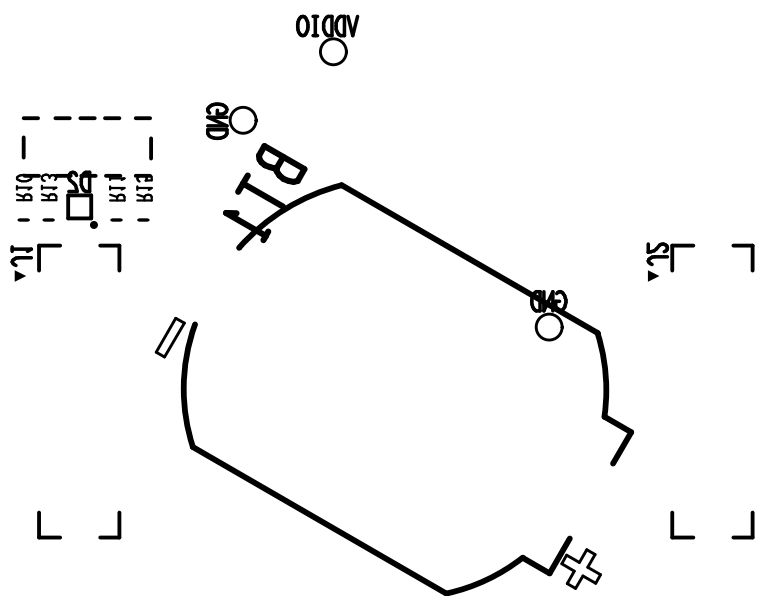


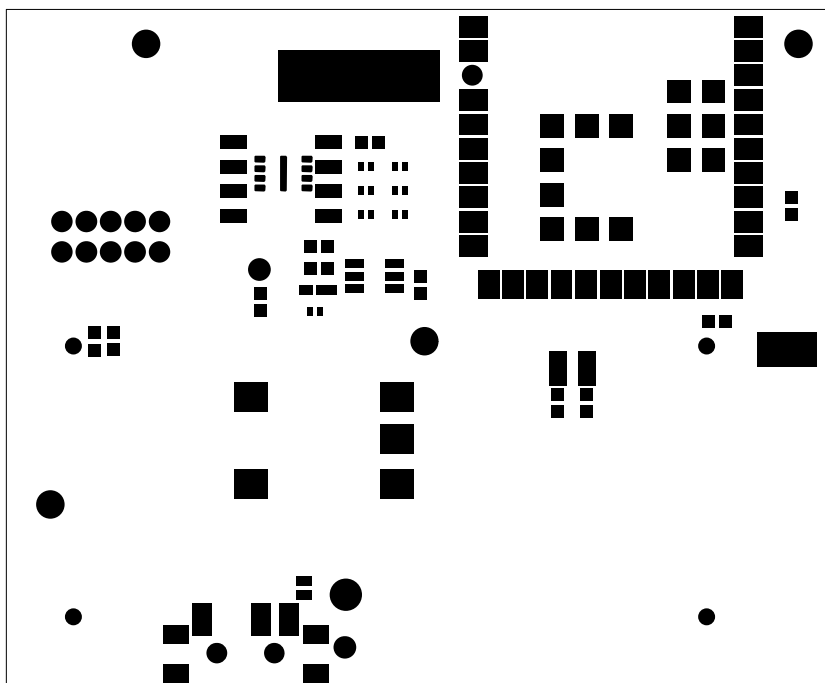


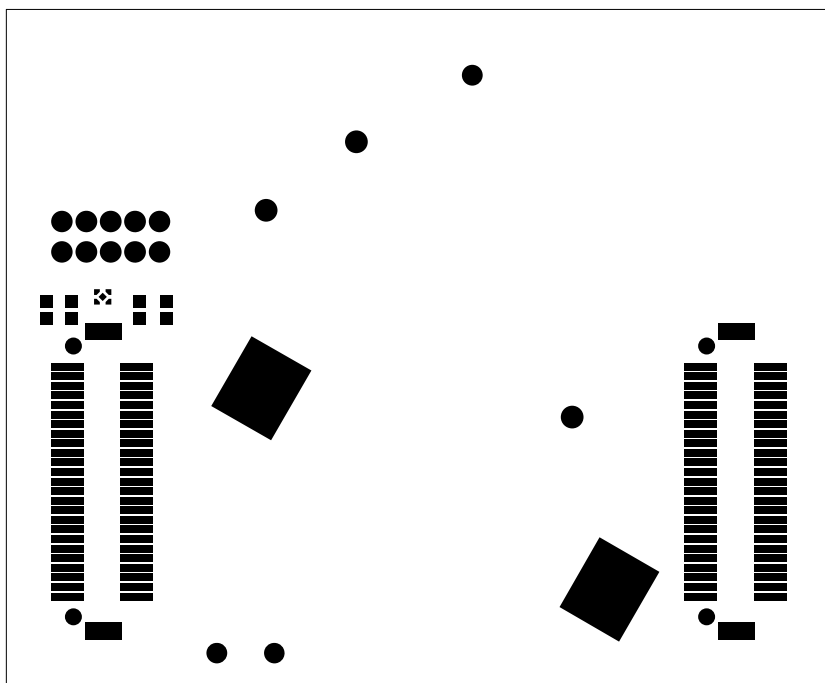


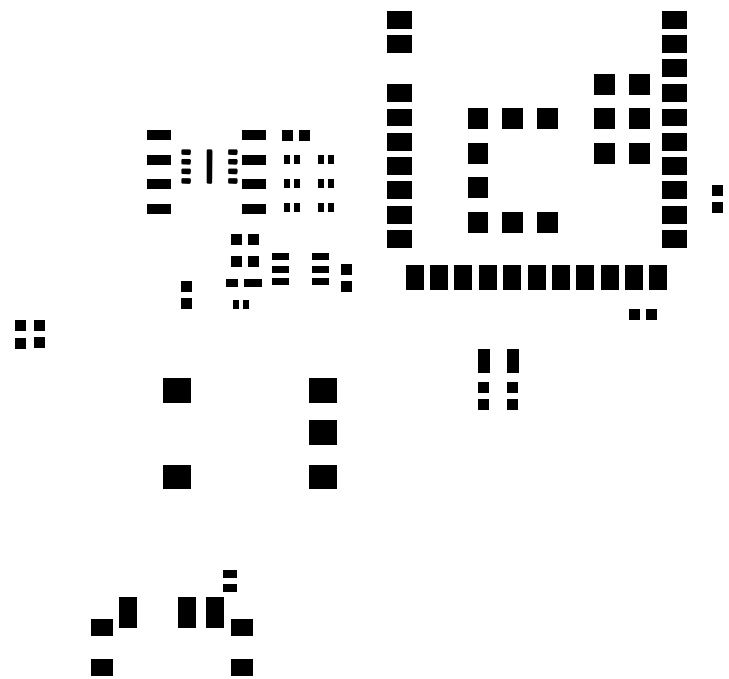




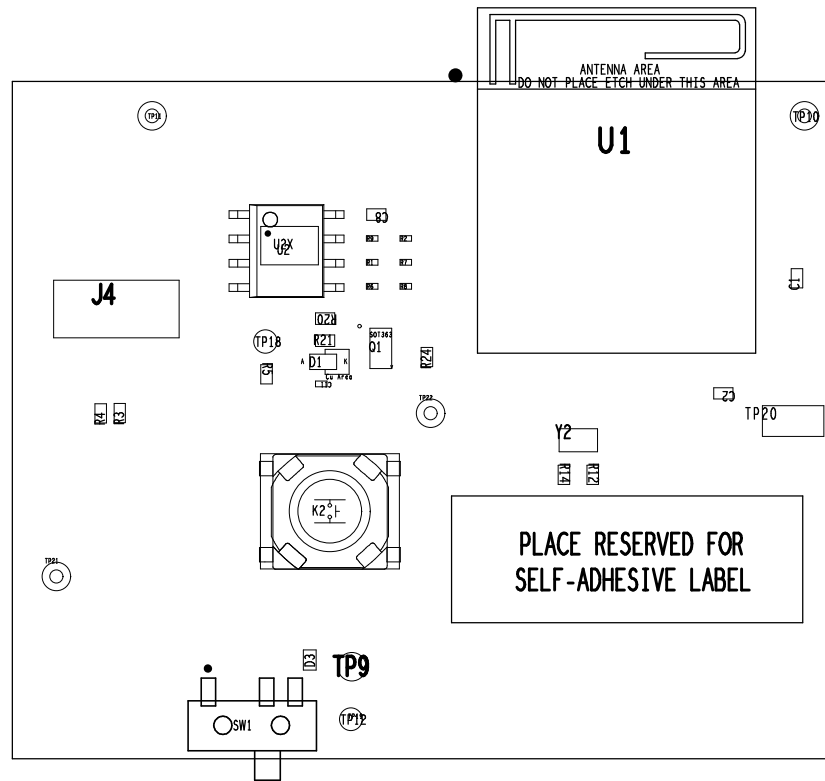


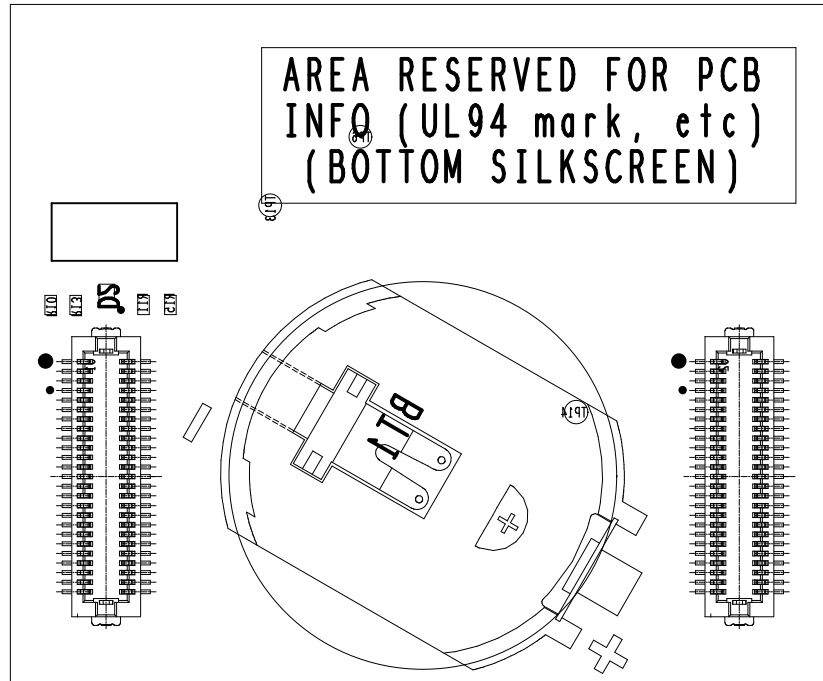



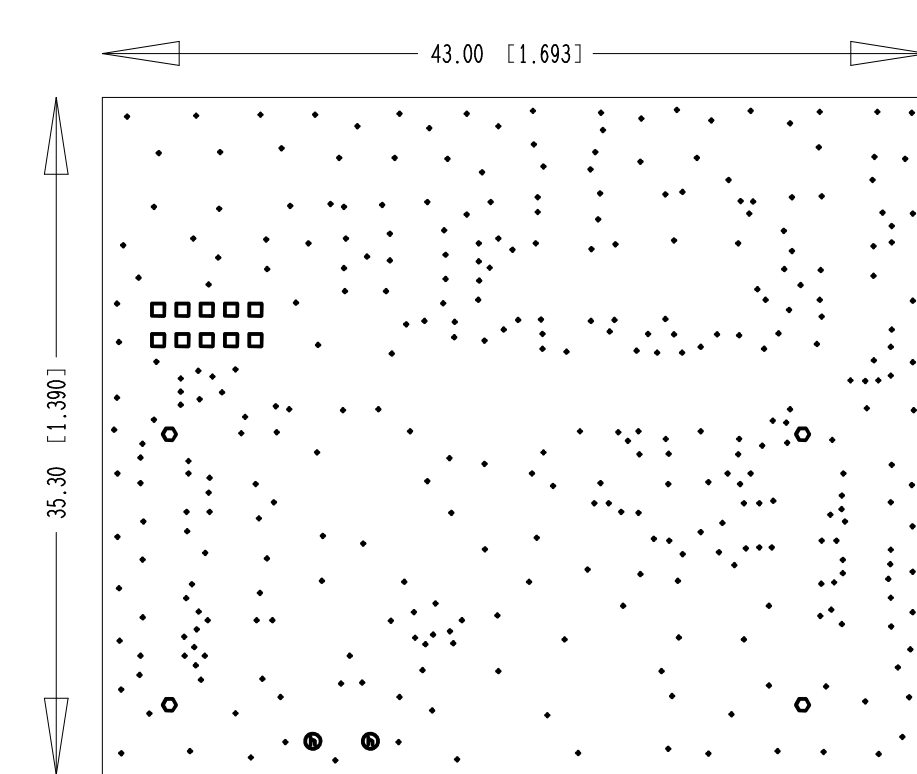

PANELIZE 2 x 3 WITH BREAKOUTS

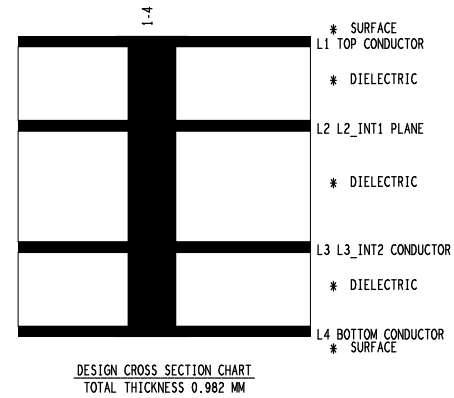

STACKUP TABLE				
Unit = Millimeter				
#	NAME	TYPE	MATERIAL	THICKNESS
1	TOP	SURFACE	AIR	0
		CONDUCTOR	COPPER	0.035
		DIELECTRIC	FR-4	0.24
2	L2 INT1	CONDUCTOR	COPPER	0.035
		DIELECTRIC	FR-4	0.36
3	L3 INT2	CONDUCTOR	COPPER	0.035
		DIELECTRIC	FR-4	0.24
4	BOTTOM	CONDUCTOR	COPPER	0.035
		SURFACE	AIR	0
TOTAL THICKNESS				0.982

RENESAS

RENESAS ELECTRONICS  
N.E.O Athinon - Patron 15  
26441, Patras, Greece  
tel: (+30) 2610390940  
fax: (+30) 2610390941

TITLE: DA1459x\_sb\_MiB

DoxBox#: 469-18-C

Designer: P. Raftopoulos

Rev: C

Date: 06/Feb/2024

DRILL CHART: TOP & BOTTOM			
ALL UNITS ARE IN MILLIMETERS			
FIGURE	FINISHED SIZE	PLATED	QTY
•	0.1	PLATED	3
•	0.15	PLATED	335
□	0.65	PLATED	10
○	0.7	NON-PLATED	4
⊖	0.9	NON-PLATED	2



