




PLACE AT LEFT EDGE OF BOARD.  
RIGHT ANGLE MALE CONNECTOR

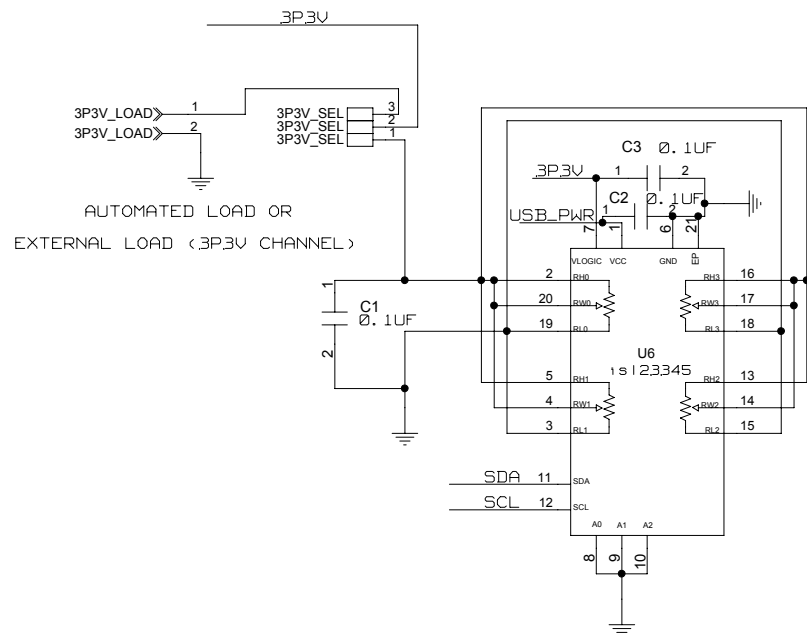

SLAVE ADDR 0X80/1  
4 DCPS TIED IN PARALLEL.  
USE 10K DCP

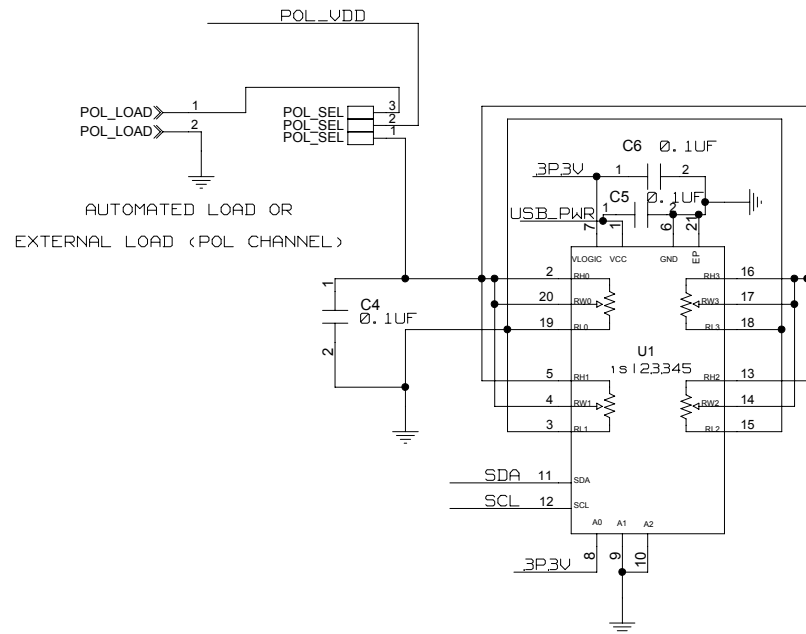

SLAVE ADDR 0X82/3  
4 DCPS TIED IN PARALLEL.  
USE 10K DCP

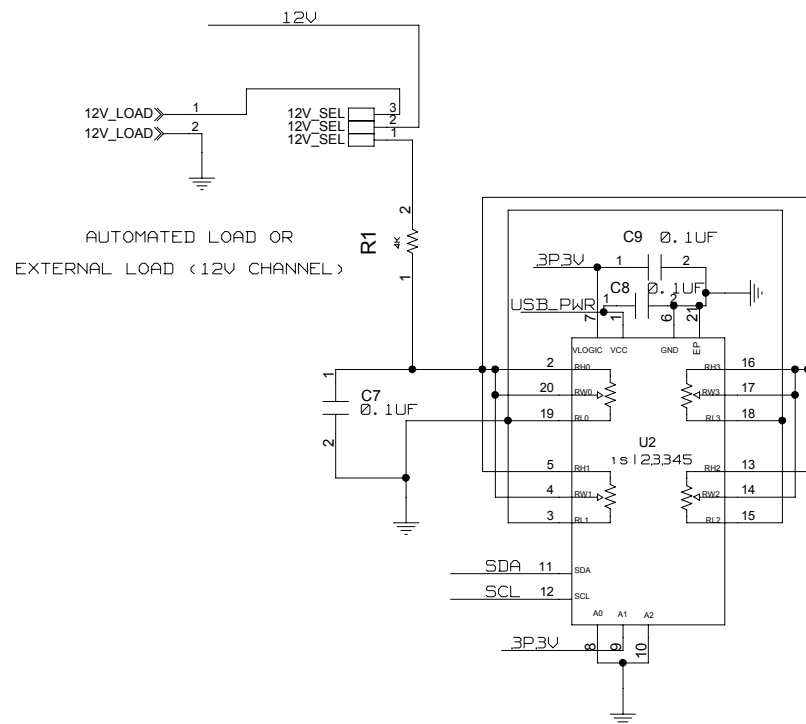

SLAVE ADDR 0X84/5  
4 DCPS TIED IN PARALLEL.  
USE 10K DCP

INTERSIL  
CORPORATION

DRAWING TITLE		
is128022 Rload Brd		
SIZE <b>C</b>	REV. A	DATE Wed Apr 17 13:45:30 2013
ENGINEER Ryan Roderick <ENGINEER2>	PAGE 2 OF 2	