

RL78/G11

R01AN4269EC0110

Rev.1.10

Automatic Liquid Dispenser

Dec. 31, 2018

Introduction

This document describes a Renesas microcontroller RL78/G11 application for automatic liquid dispenser.

Target Device

RL78/G11

When applying the sample program covered in this application note to another microcomputer, modify the program according to the specifications for the target microcomputer and conduct an extensive evaluation of the modified program.

Contents

1. Description	3
1.1 Abstract.....	3
1.2 Specifications and Main Technical Parameters.....	3
2. RL78/G11 Microcontroller	4
2.1 RL78/G11 Block Diagram	4
2.2 Key Features.....	5
2.3 Pin Configuration	5
3. System Outline	6
3.1 Principle Introduction.....	6
3.2 Peripheral Functions to be Used	7
3.3 Pins to be Used	7
3.4 Operating Instructions.....	7
4. Hardware.....	8
4.1 Power Supply	9
4.2 Infrared LED and Phototransistor	9
4.3 Buzzer Driver Circuit.....	10
4.4 LED Driver Circuit	10
4.5 Motor Driver Circuit	11
5. Software	12
5.1 Integrated Development Environment	12
5.2 Option Byte	12
5.3 Operation Outline	13
5.4 Flow Chart.....	14
5.4.1 Main Processing	14
5.4.2 8-Bit Interval Timer Interrupt.....	16
6. Sample Code	17
7. Reference Documents	17

1. Description

1.1 Abstract

An automatic liquid dispenser is specifically a hands-free dispenser of liquids such as soap, hand sanitizer, shampoos, or hand lotions. As touch-free design eliminates bacterial transmission, automatic liquid dispenser is popular in public places and private institutions. Dispenser only distributes a set amount of liquid per motion activation to minimize waste. This document provides an automatic liquid dispenser solution based on Renesas low cost microcontroller RL78/G11.

1.2 Specifications and Main Technical Parameters

Technical Parameters

- | | |
|---|-------------------------------------|
| • Power supply: | 6 V (4 AAA batteries) |
| • Low power consumption current: | 34 μ A when MCU is in STOP mode |
| • Sensing method: | Infrared |
| • Sensing distance: | 0 ~ 15 cm |
| • Amount of liquid per motion activation: | 0.5 / 0.8 ml selectable |

Specifications

- | | |
|---|--|
| • Low power consumption function: | When power switch is set to OFF, the power supply of the system is cut off and no current consumption is achieved. After the system is powered on, it operates in low power consumption mode in most conditions to obtain longer battery life. |
| • Audible and visual indication function: | If hands are placed under the nozzle, LED and buzzer are turned on to indicate liquid dispensing. |
| • Dispensing time limit function: | Even if hands are always under the nozzle, a maximum duration of 2 seconds dispensing is accomplished. |
| • Low battery voltage warning: | When battery voltage is lower than 4.8 V in which condition drive capability of battery is too low to operate motors, LED blinks to indicate this low power condition when hands are placed under the nozzle. |
| • Dispensing amount selectable: | Switch is used to select amount of liquid dispensing per motion. |
| • Operating temperature: | -10°C ~ 60°C |
| • Operating humidity: | 5 ~ 99% RH (No condensate water) |

2. RL78/G11 Microcontroller

2.1 RL78/G11 Block Diagram

Figure 2.1 shows the block diagram of RL78/G11 (20-pin products).

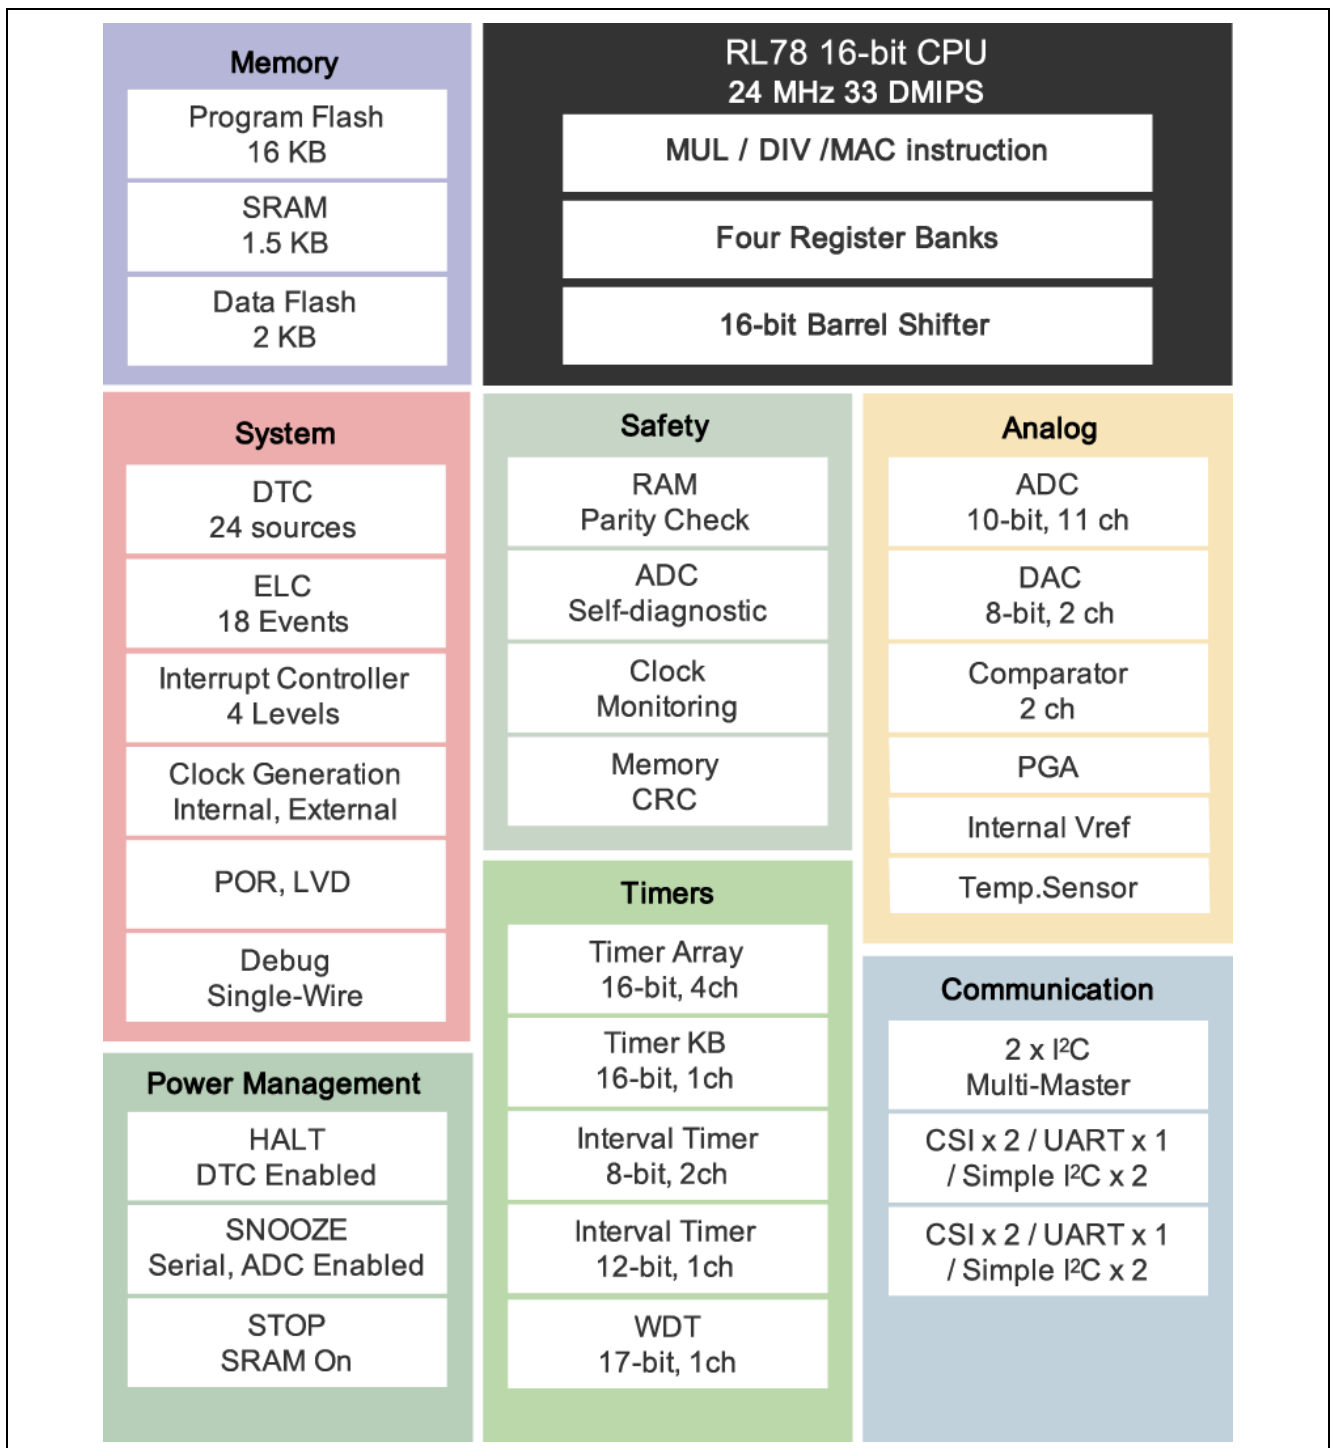


Figure 2.1 RL78/G11 (20-pin products) Block Diagram

2.2 Key Features

- Minimum instruction execution time: Can be changed from high speed (0.04167 μ s: @ 24 MHz operation with high-speed on-chip oscillator) to ultra-low speed (66.6 μ s: @ 15 kHz operation with low-speed on-chip oscillator clock)
- General-purpose registers: (8-bit register $\times$ 8) $\times$ 4 banks
- ROM: 16 KB, RAM: 1.5 KB, data flash: 2 KB
- Selectable high-speed on-chip oscillator clock: 48/24/16/12/8/6/4/3/2/1 MHz (TYP.)
- Selectable middle-speed on-chip oscillator clock: 4/2/1 MHz (TYP.)
- On-chip debug function
- On-chip selectable power-on-reset (POR) circuit
- On-chip voltage detector (LVD)
- On-chip watchdog timer (operable with the dedicated low-speed on-chip oscillator)
- On-chip key interrupt function: 8 key interrupt input pins
- On-chip clock output/buzzer output controller
- On-chip BCD (binary-coded decimal) correction circuit
- I/O port: 17 to 21
- Timer
 - 16-bit timer (TAU): 4 channels
 - TKB: 1 channel
 - 12-bit interval timer: 1 channel
 - 8-bit interval timer: 2 channels
- Serial interfaces
 - CSI: 4 channels
 - UART: 2 channels
 - I²C/Simplified I²C communication: 4 channels
 - Multimaster I²C: 2 channels
- 8/10-bit resolution A/D converter: 10 to 11 channels
- 8/10-bit resolution D/A converter: 2 channels
- Comparator: 2 channels
 - Operating modes: Comparator high-speed mode, comparator low-speed mode, window mode
- PGA: 1 channel
- Data transfer controller (DTC)
- Event link controller (ELC)
- Standby function: HALT or STOP mode
- Power supply voltage: VDD = 1.6 to 5.5 V
- Operating ambient temperature: TA = -40 to +85°C

RL78/G11 is widely used in common technologies for industry, office, home appliance, healthcare, security, city and detectors application.

2.3 Pin Configuration

Figure 2.2 shows the pin configuration of RL78/G11 (20-pin products).

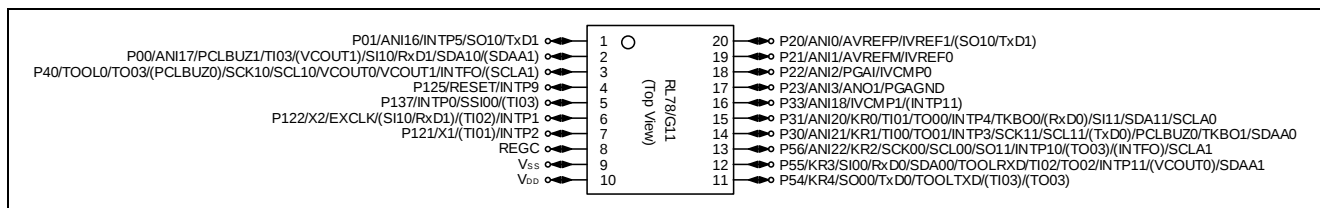


Figure 2.2 RL78/G11 (20-pin products) Pin Configuration

3. System Outline

3.1 Principle Introduction

After system initialization is completed, STOP mode is entered for low power consumption. Every 50 milliseconds MCU is waked up from STOP mode for hand detection. The infrared LED is turned on and status of phototransistor is checked. If there are hands placed in the beam of light emitted by infrared LED, MCU detects the status change of phototransistor and activates LED, buzzer and motor. Liquid is pumped through the nozzle by motor.

Figure 3.1 shows the system block diagram for this document.

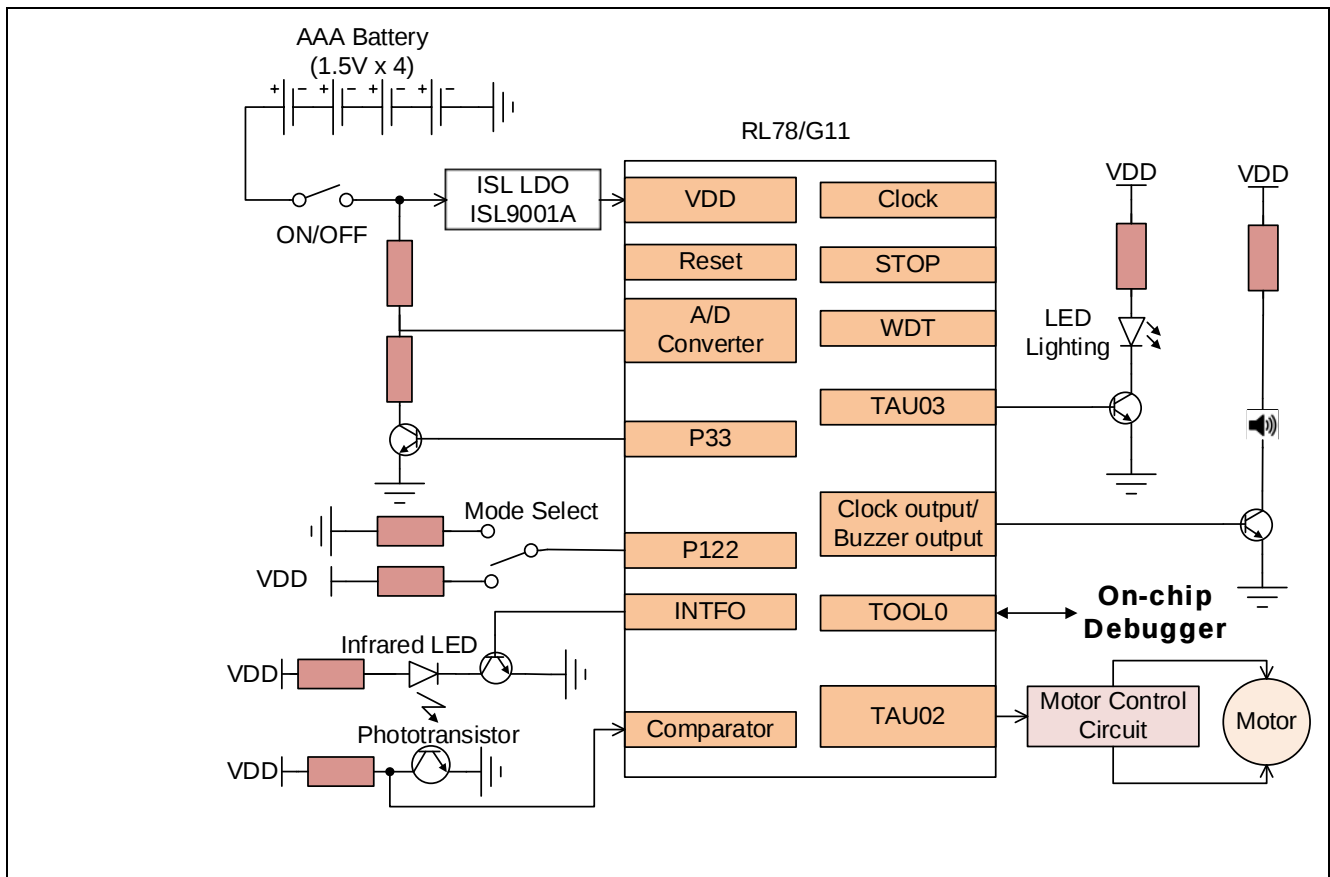


Figure 3.1 System Block Diagram

3.2 Peripheral Functions to be Used

Table 3.1 lists the peripheral functions to be used and their usages.

Table 3.1 Peripheral Functions to be Used

Peripheral Function	Usage
8-bit Interval Timer Channel 0	Generate 50 milliseconds interval to wake up MCU from STOP mode
12-bit Interval Timer	Control the lasting time of infrared LED on Control the timing of checking phototransistor status indicating whether hands are placed between the beam light emitted by infrared LED
Comparator	Compare the voltage on phototransistor collector with internal reference voltage 1.45 V
Interrupt Function	Use the INTFO function to enable infrared LED emitter
PCLBUZ0	Output a square wave to drive the buzzer
A/D Converter	Monitor the battery voltage
I/O port	Detect the mode select of dispensing liquid
Timer Array Unit	Output PWM to drive the motor and the LED

3.3 Pins to be Used

Table 3.2 lists the pins to be used and their descriptions.

Table 3.2 Pins to be Used

Pin Name	Description
P40/TOOL0	On-chip debug
P125/RESET	Hardware reset
P122	Normal/Light mode selection of dispensing liquid
V _{SS}	Ground
V _{DD}	Power supply voltage
P22/IVCMP0	Phototransistor collector voltage
P31/ANI20	Battery voltage
P33	Enable the input of half battery voltage to A/D converter
P30/PCLBUZ0	Drive speaker
P56/INTFO	Control ON/OFF of infrared LED
P55/TO02	Drive motor
P54/(TO03)	Drive LED

3.4 Operating Instructions

- (1) After OFF-NORMAL-LIGHT switch is selected to NORMAL, the system is powered on and normal mode is selected in which 0.8 ml of liquid is distributed per motion activation. If hands are placed between the infra LED and the phototransistor, motor is activated to pump liquid from tank. LED and buzzer are turned on to indicate liquid dispensing. As soon as hands are removed, dispensing is terminated.
- (2) When OFF-NORMAL-LIGHT switch is selected to LIGHT, light mode is selected in which 0.5 ml of liquid is distributed per motion activation. All the other operations are the same as that in normal mode.
- (3) Even if hands are kept placed under the nozzle without any leave, the system dispenses liquid for a maximum time of 2 seconds.
- (4) Each time hands are placed under the nozzle; battery voltage is checked and low-voltage warning is indicated through buzzer alarming if battery is in low power status.

4. Hardware

There is an infrared LED and phototransistor, buzzer, LED and motor in the system. Infrared LED gives light which is sensed by phototransistor. When hands are placed under the nozzle, the beam light is cut off and the status of phototransistor is changed. MCU detects that change and drives buzzer, LED and motor. Liquid is pumped through the nozzle with motor running.

Figure 4.1 shows the board picture.

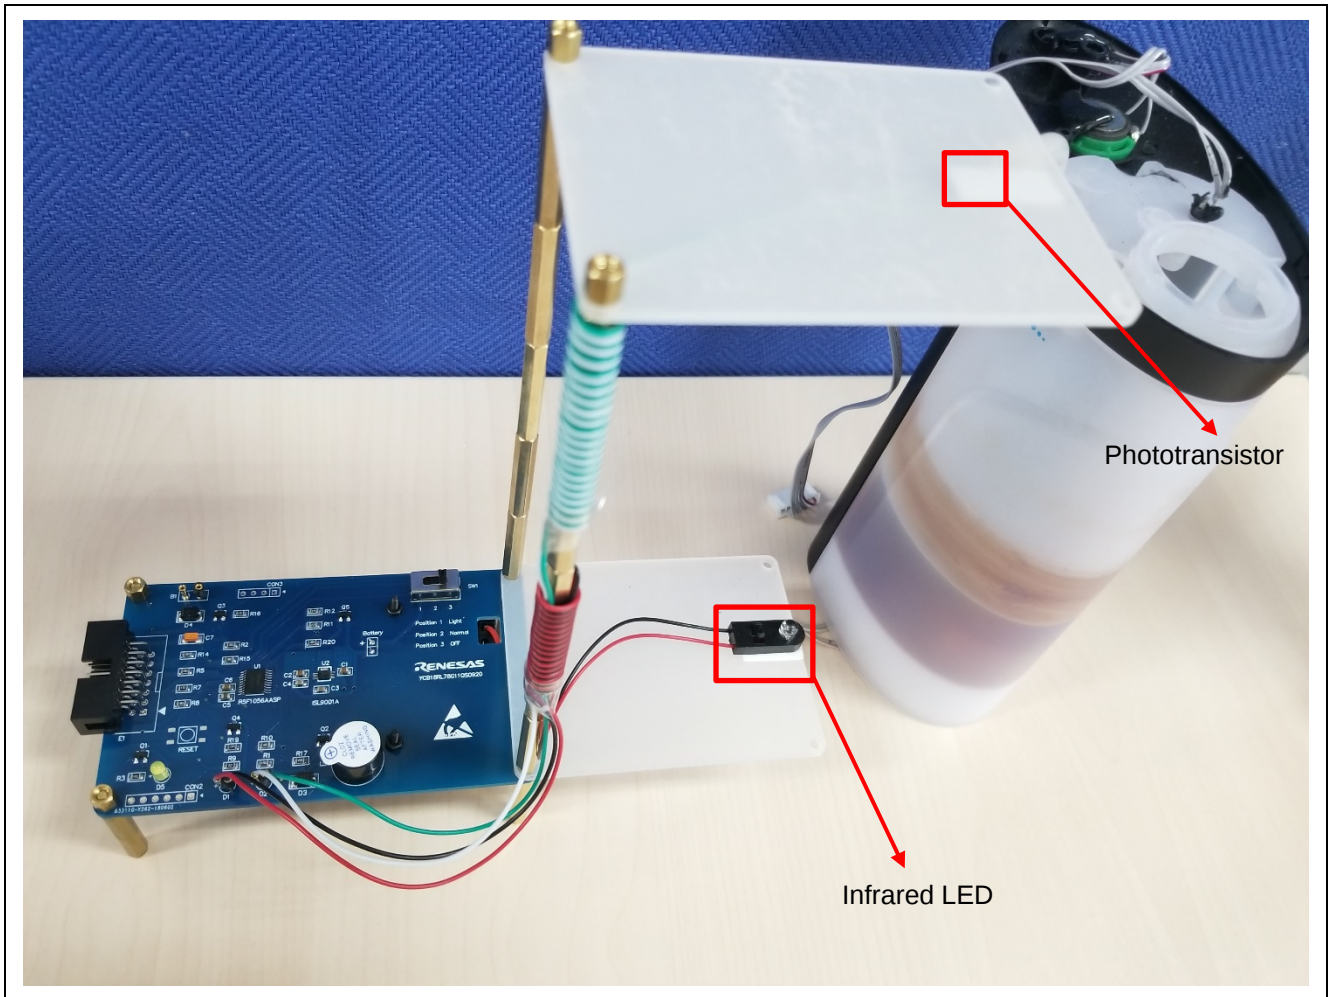


Figure 4.1 Board Picture

Figure 4.2 shows the schematic of power supply.



Extremely low quiescent current of 25 μ A makes the battery life longer.

Figure 4.3 shows the schematics of infrared LED and phototransistor.



At fixed interval (50 milliseconds) MCU enables the LED emitting and checks the status of phototransistor to identify if hands are placed under the nozzle.

4.3 Buzzer Driver Circuit

Figure 4.4 shows the schematic of the buzzer driver circuit.

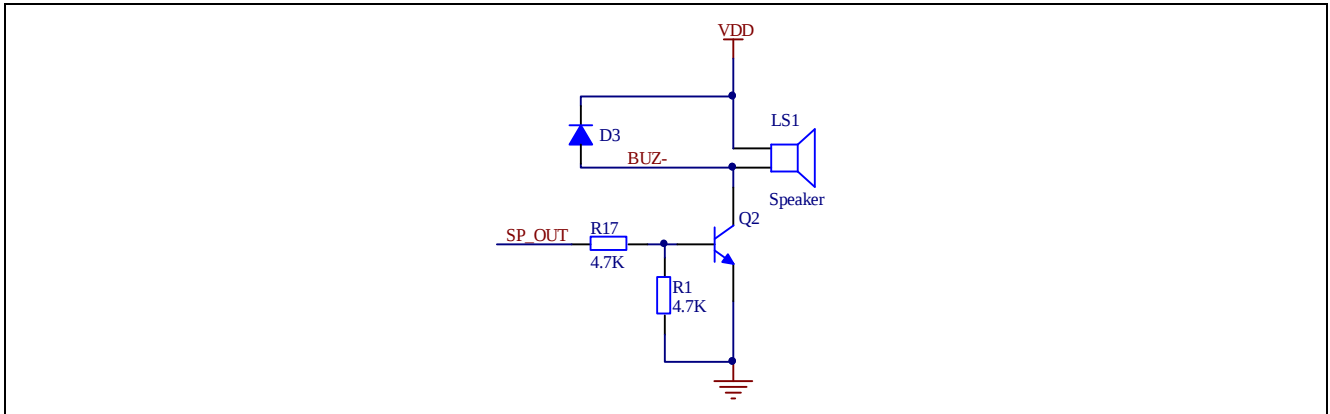


Figure 4.4 Buzzer Driver Circuit

The buzzer with 2300 ± 500 Hz resonant frequency, 25 mA rated current and 3.5 V ~ 5.5 V rated voltage is used in the system to indicate liquid dispensing and battery low-voltage warning.

MCU outputs square wave of 1.8 kHz with PCLBUZ0 to SP_OUT to make the buzzer sound when hands are placed under the nozzle.

If the system detects the voltage of the battery is lower than 4.8 V, output of PCLBUZ0 is toggled between on and off every 50 milliseconds to indicate low power.

4.4 LED Driver Circuit

Figure 4.5 shows the schematic of the LED driver circuit.

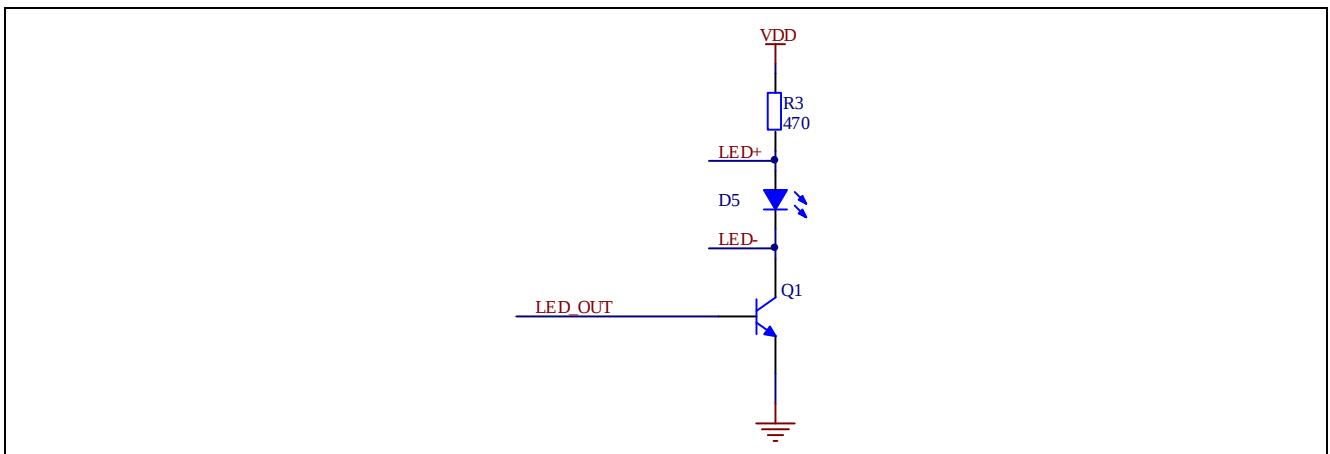


Figure 4.5 LED Driver Circuit

A basic yellow 3mm LED with 2.0 ~ 2.4 V forward drop, 20 mA maximum current and 40 ~ 100 mcd luminous intensity is used to indicate liquid dispensing in the system.

MCU drives the LED with PWM of Timer Array Unit to LED_OUT.

4.5 Motor Driver Circuit

Figure 4.6 shows the schematic of the motor driver circuit.

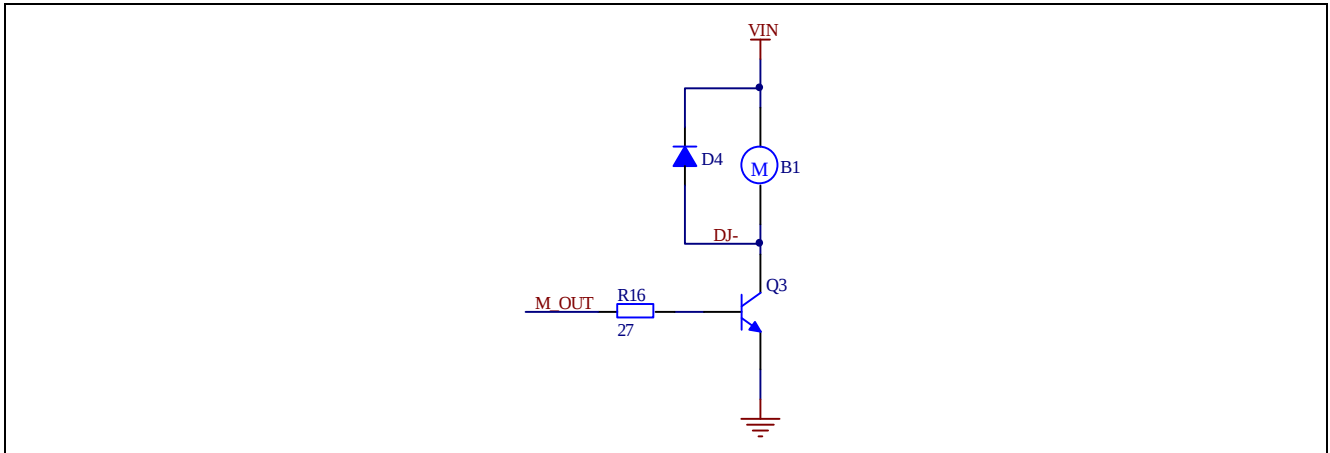


Figure 4.6 Motor Driver Circuit

DC motor of 5 V rated voltage, 0.49 mN·m rated load and 11600 min⁻¹ is used in this system to drive the fan to pump liquid from tank.

MCU drives the motor with PWM of Timer Array Unit to M_OUT.

PWM with a duty cycle of 100% is used to drive motor for liquid pumping in NORMAL mode while 75% in LIGHT mode.

5. Software

5.1 Integrated Development Environment

The sample code described in this chapter has been checked under the conditions listed in the table below.

Table 5.1 Operation Check Conditions

Item	Description
Microcontroller used	RL78/G11 (R5F1056AA)
Operating frequency	Middle-speed on-chip oscillator clock: 1 MHz CPU/peripheral hardware clock: 1 MHz
Operating voltage	3.3 V (can run on a voltage range of 2.7 V to 5.5 V.) SPOR detection voltage When power supply falls: TYP. 2.75V (2.70 V to 2.96 V) When power supply rises: TYP. 2.81V (2.76 V to 3.02 V)
Integrated development environment (CS+)	CS+ V6.00.00 from Renesas Electronics Corp.
C compiler (CS+)	CC-RL V1.05.00 from Renesas Electronics Corp.
Integrated development environment (e ² studio)	e ² studio V6.0.0 from Renesas Electronics Corp.
C compiler (e ² studio)	CC-RL V1.05.00 from Renesas Electronics Corp.

5.2 Option Byte

Table 5.2 summarizes the settings of the option bytes.

Table 5.2 Option Byte Settings

Address	Value	Description
000C0H/010C0H	11101111B	Watchdog timer counter operation disabled (counting stopped after reset)
000C1H/010C1H	01111111B	LVD off
000C2H/010C2H	10101101B	Operating frequency: 1 MHz (1.8 V ~ 5.5 V)
000C3H/010C3H	00000100B	Disables on-chip debug operation

5.3 Operation Outline

The tasks of the entire system are listed as below: reset/initialization, STOP mode, normal dispensing, light dispensing and battery low voltage warning.

Figure 5.1 shows the block diagram for the tasks transition.

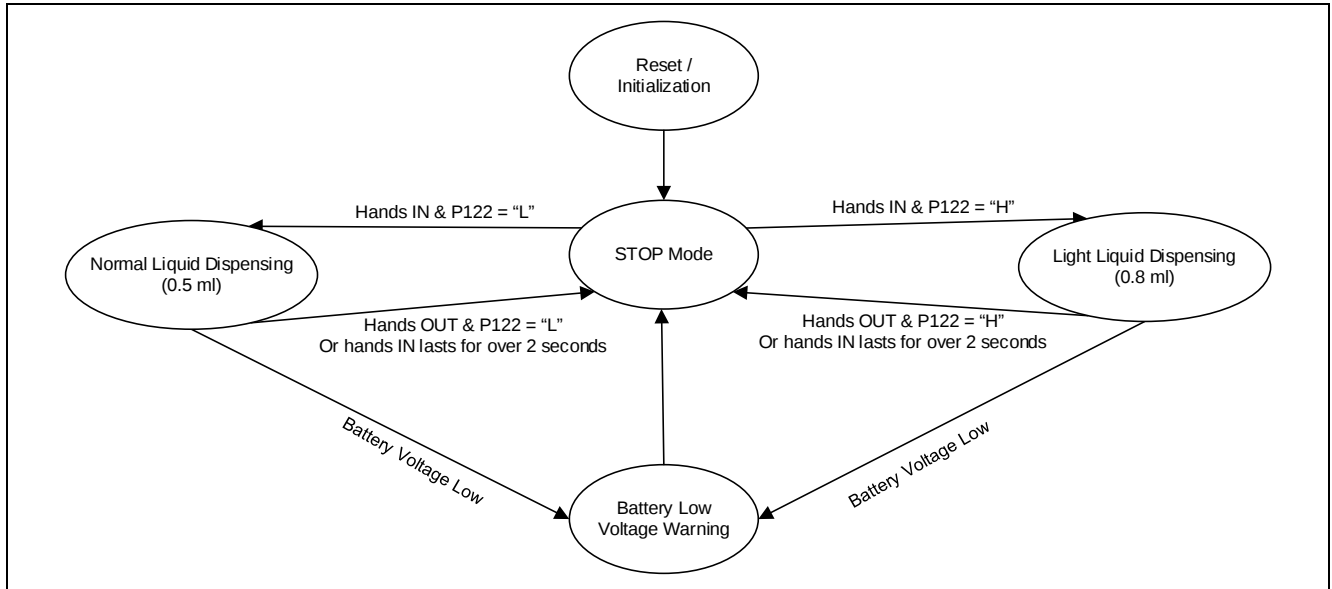


Figure 5.1 Tasks Transition Block Diagram

(1) Reset / Initialization

After OFF-Light-Normal is activated, the system is powered on and initialization routine of each module is executed.

(2) STOP Mode

After initialization, STOP mode is entered for low power consumption.

(3) Light Liquid Dispensing

OFF-Normal-Light switch is in Light position. When hands are detected between the infrared LED and phototransistor, motor is driven to pump liquid from tank. LED and buzzer are activated to indicate liquid dispensing.

(4) Normal Liquid Dispensing

OFF-Normal-Light switch is in Normal position. When hands are detected between the infrared LED and phototransistor, motor is driven to pump liquid from tank. LED and buzzer are activated to indicate liquid dispensing.

(5) Battery Low Voltage Warning

When battery voltage is lower than 4.8 V, each time hands are detected, buzzer is alarmed while LED and motor are kept not working.

5.4 Flow Chart

5.4.1 Main Processing

Figure 5.2 and Figure 5.3 show the flowchart for main processing routine.

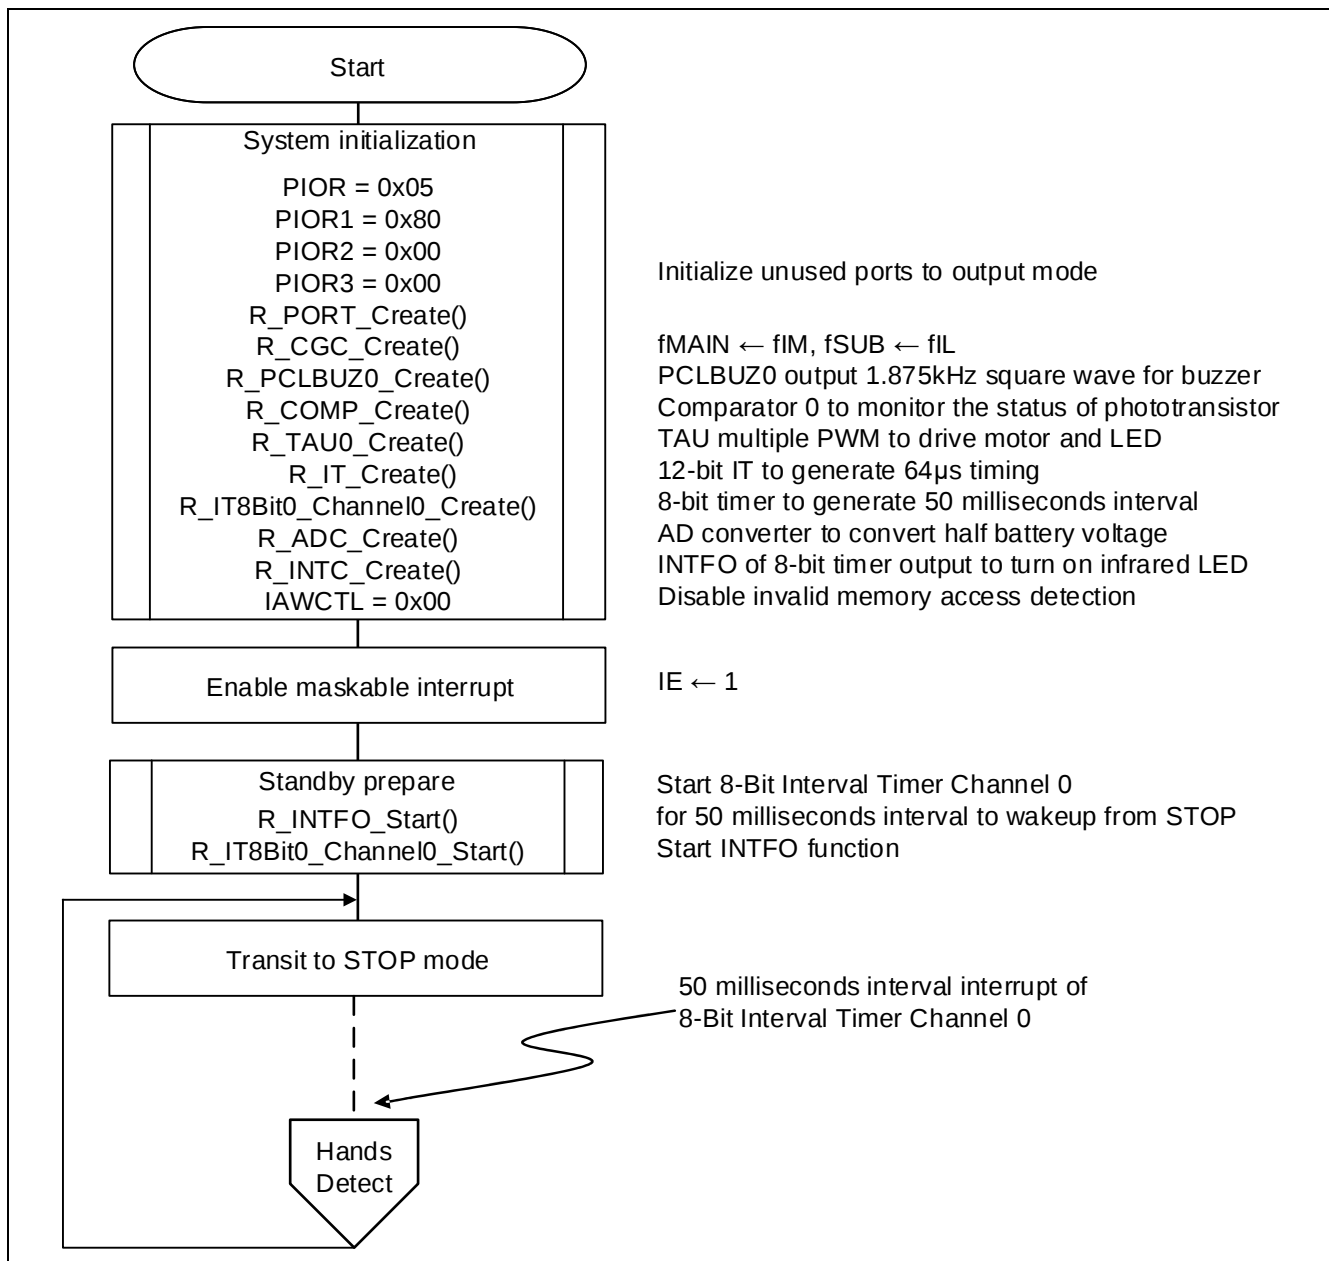


Figure 5.2 Main Processing (1)

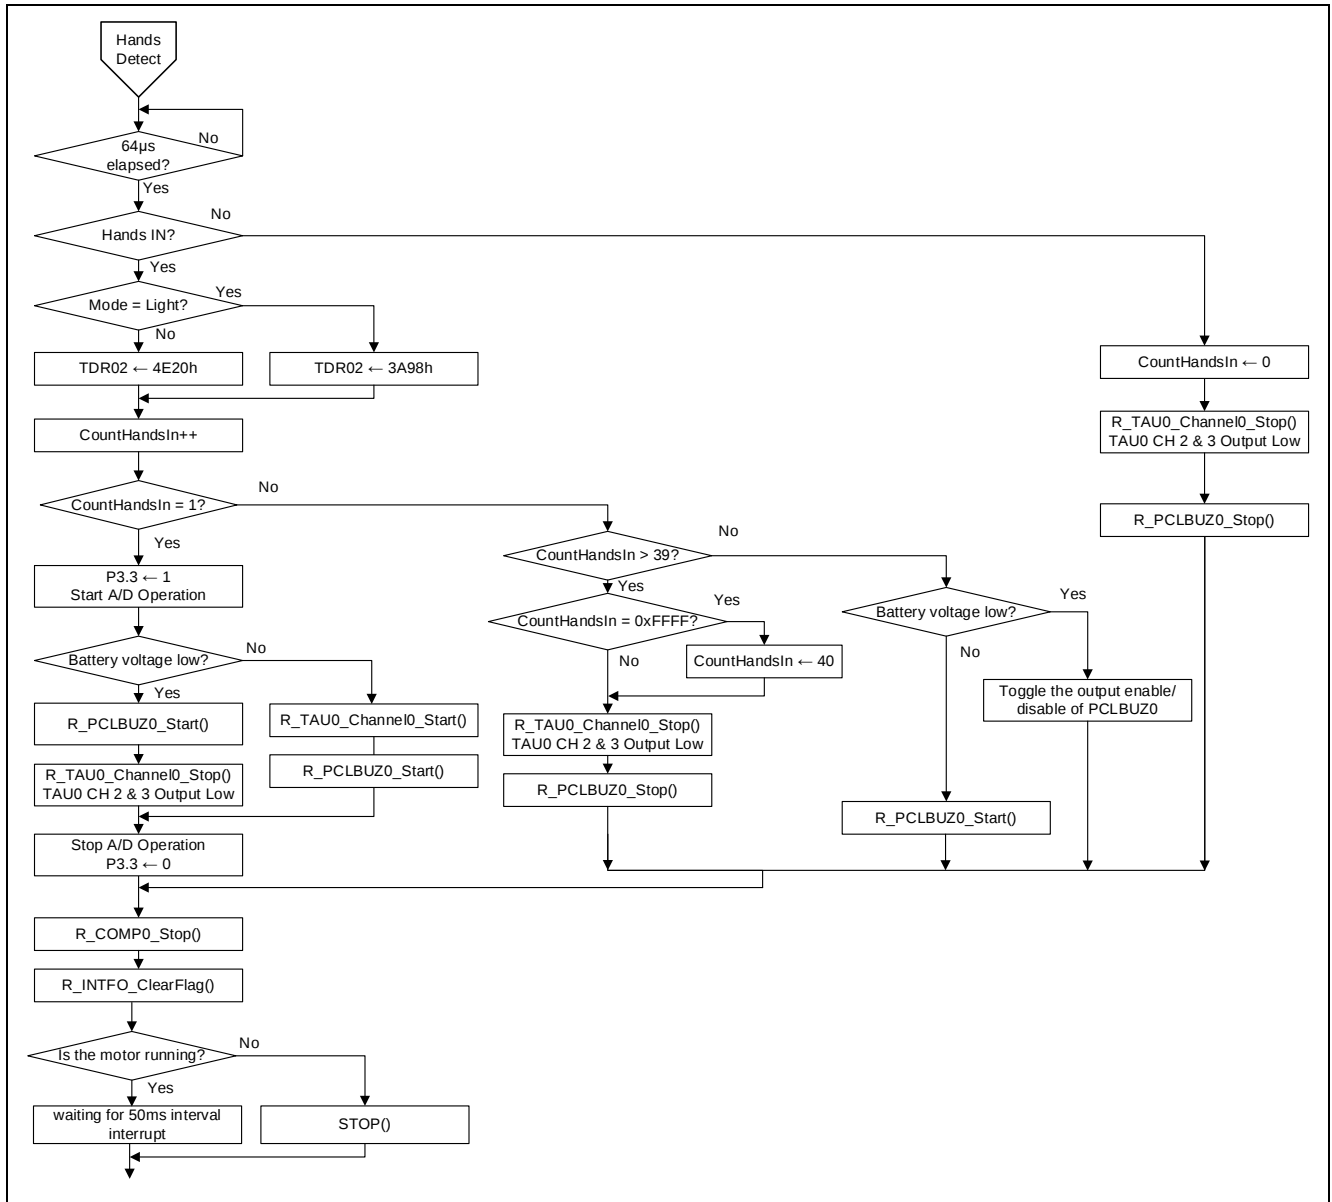


Figure 5.3 Main Processing (2)

5.4.2 8-Bit Interval Timer Interrupt

8-bit interval timer interrupt wakes up MCU from STOP mode every 50 milliseconds.

Figure 5.4 shows the flowchart for 8-bit interval timer.

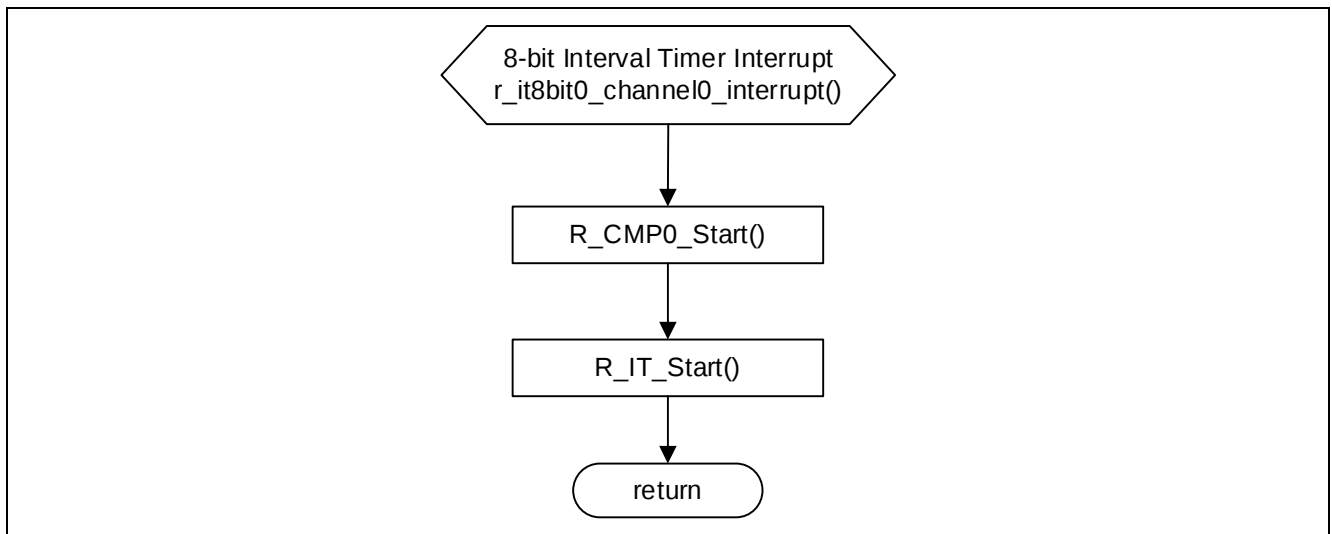


Figure 5.4 8-bit Interval Timer Interrupt

6. Sample Code

The sample code is available on the Renesas Electronics Website.

7. Reference Documents

RL78/G11 User's Manual: Hardware (R01UH0637)

RL78 Family User's Manual: Software (R01US0015)

(The latest versions of the documents are available on the Renesas Electronics Website.)

Technical Updates/Technical News

(The latest information can be downloaded from the Renesas Electronics Website.)

Website and Support

Renesas Electronics Website

<http://www.renesas.com/>

Inquiries

<http://www.renesas.com/contact/>

All trademarks and registered trademarks are the property of their respective owners.

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Sep. 30, 2018	—	First edition issued
1.10	Dec. 31, 2018	15	Modified Figure 5.3

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Handling of Unused Pins

Handle unused pins in accordance with the directions given under Handling of Unused Pins in the manual.

- The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible. Unused pins should be handled as described under Handling of Unused Pins in the manual.

2. Processing at Power-on

The state of the product is undefined at the moment when power is supplied.

- The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the moment when power is supplied.
In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the moment when power is supplied until the reset process is completed.
In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the moment when power is supplied until the power reaches the level at which resetting has been specified.

3. Prohibition of Access to Reserved Addresses

Access to reserved addresses is prohibited.

- The reserved addresses are provided for the possible future expansion of functions. Do not access these addresses; the correct operation of LSI is not guaranteed if they are accessed.

4. Clock Signals

After applying a reset, only release the reset line after the operating clock signal has become stable. When switching the clock signal during program execution, wait until the target clock signal has stabilized.

- When the clock signal is generated with an external resonator (or from an external oscillator) during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Moreover, when switching to a clock signal produced with an external resonator (or by an external oscillator) while program execution is in progress, wait until the target clock signal is stable.

5. Differences between Products

Before changing from one product to another, i.e. to a product with a different part number, confirm that the change will not lead to problems.

- The characteristics of Microprocessing unit or Microcontroller unit products in the same group but having a different part number may differ in terms of the internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
 6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338