

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.


(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

On Board Programming for QzROM / FLASH with E8a



Renesas Technology Corp.

Communication Methods for E8a

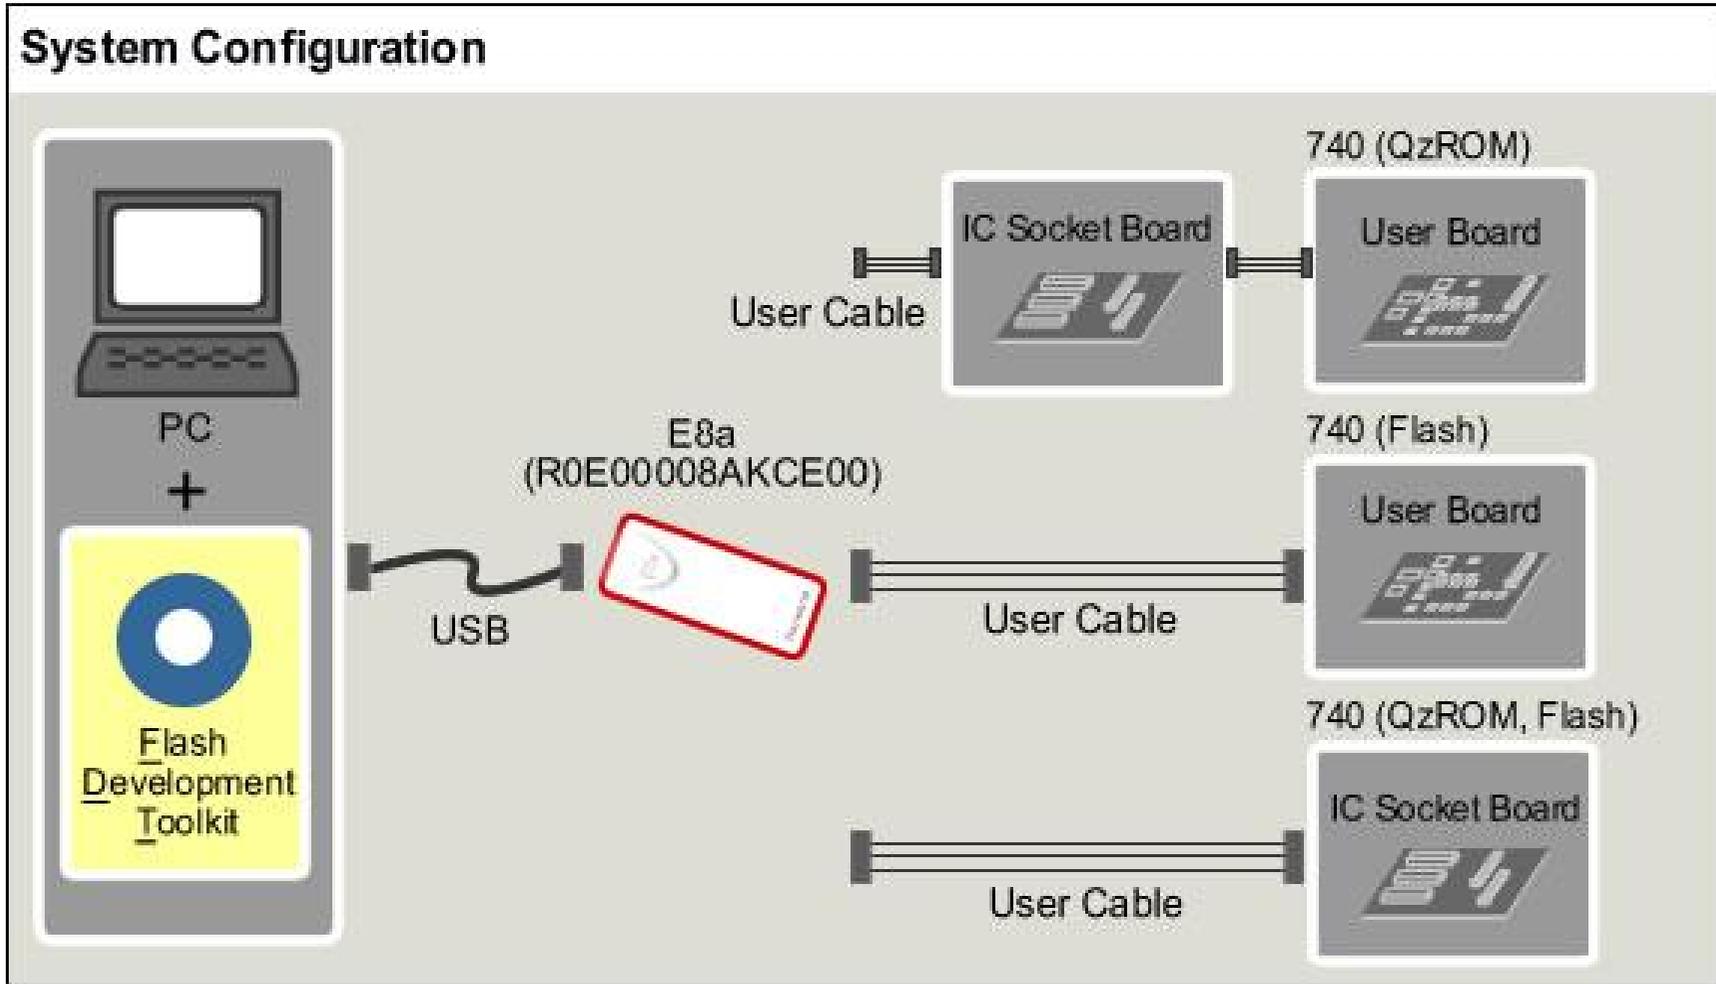


On board programming circuit diagram for E8a(1)



1. 38D5 and 38D2 Group QzROM (OSCSEL = "H")

IC Socket Board/E8a	QzROM Signal
1	ESCLK
2	VSS,AVSS
3	VPP
4	ESPGMB
5	N.C.
6	VSS,AVSS
7	ESDA
8	E8VCC
9	N.C.
10	VSS,AVSS
11	N.C.
12	VSS,AVSS
13	RESET
14	VSS,AVSS

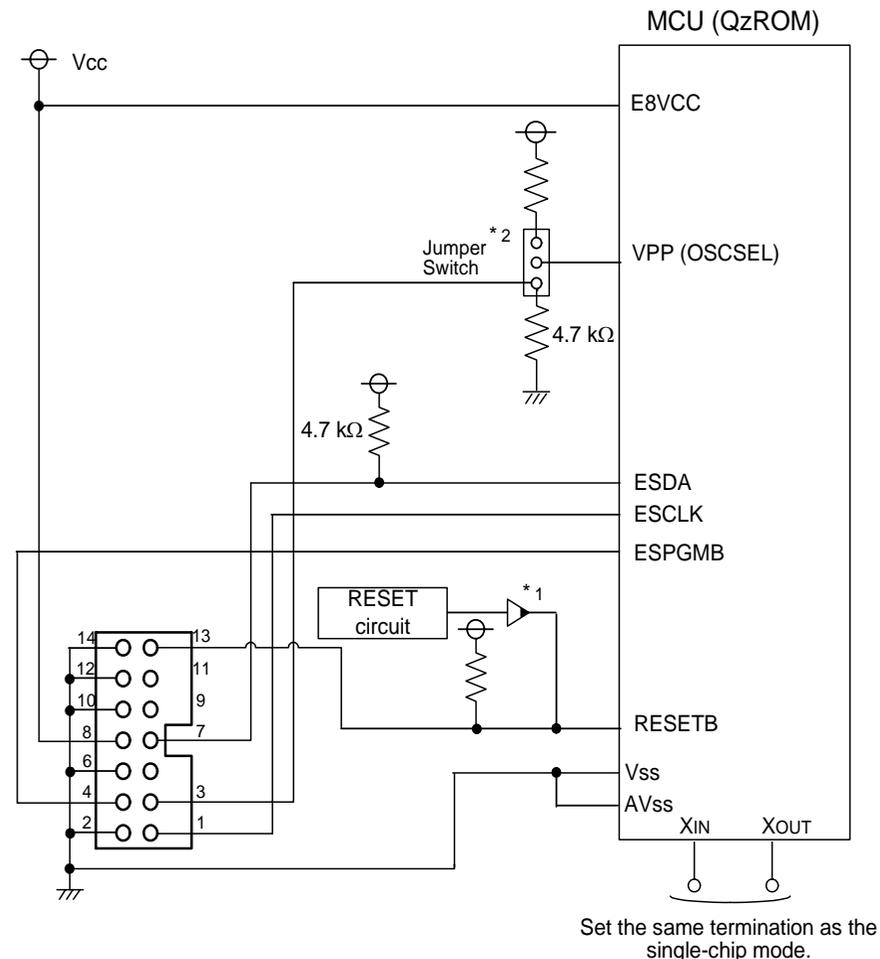

*1 : Open-collector buffer

*2 : When programming QzROM is performed, disconnect Vcc from OSCSEL by a jumper switch.


Note: For the programming circuit, the wiring capacity of each signal pin must not exceed 47 pF.

On board programming circuit diagram for E8a(2)



2. 38D5 and 38D2 Group QzROM (OSCSEL = "L") FLASH and QzROM except for the 3823 Group

IC Socket Board/E8a	QzROM Signal	FLASH Signal
1	ESCLK	SCLK
2	VSS,AVSS	VSS,AVSS
3	VPP	CNVSS
4	ESPGMB	N.C.
5	N.C.	N.C.
6	VSS,AVSS	VSS,AVSS
7	ESDA	TXD
8	E8VCC	VCC
9	N.C.	BUSY
10	VSS,AVSS	VSS,AVSS
11	N.C.	RXD
12	VSS,AVSS	VSS,AVSS
13	RESET	RESET
14	VSS,AVSS	VSS,AVSS

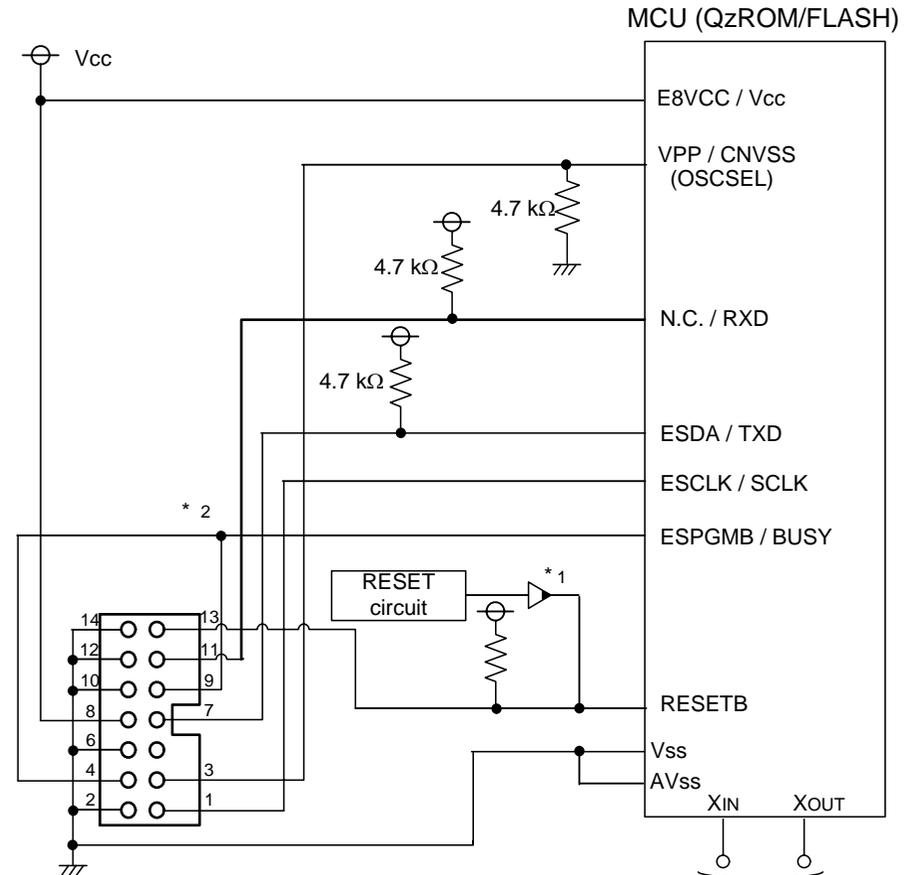

Set the same termination as the single-chip mode.

*1 : Open-collector buffer

*2 : To write data on the Flash ROM and QzROM using the same IC socket board / user board, connect Pin No. 4 and No. 9.


Note: For the programming circuit, the wiring capacity of each signal pin must not exceed 47 pF. Connect the oscillation circuit to external for flash memory version.

On board programming circuit diagram for E8a(3)



IC Socket Board/E8a	QzROM Signal
1	ESCLK
2	VSS,AVSS
3	P40
4	ESPGMB
5	N.C.
6	VSS,AVSS
7	ESDA
8	E8VCC
9	N.C.
10	VSS,AVSS
11	N.C.
12	VSS,AVSS
13	RESET
14	VSS,AVSS

3. 3823 Group

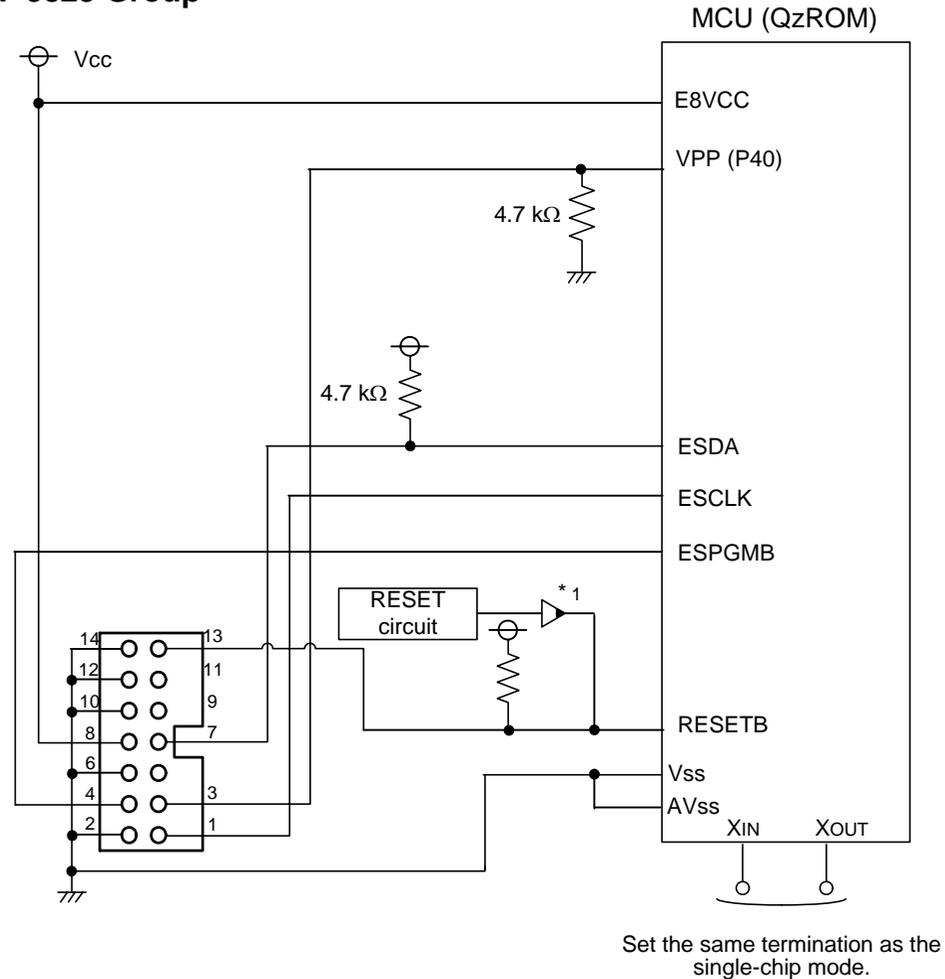

*1 : Open-collector buffer


Note: For the programming circuit, the wiring capacity of each signal pin must not exceed 47 pF.

On board programming circuit diagram for E8a(4)



4. 3850A Group FLASH

IC Socket Board/E8a	FLASH Signal
1	SCLK
2	VSS,AVSS
3	N.C.
4	N.C.
5	N.C.
6	VSS,AVSS
7	TXD
8	VCC
9	BUSY
10	VSS,AVSS
11	RXD
12	VSS,AVSS
13	RESET
14	VSS,AVSS

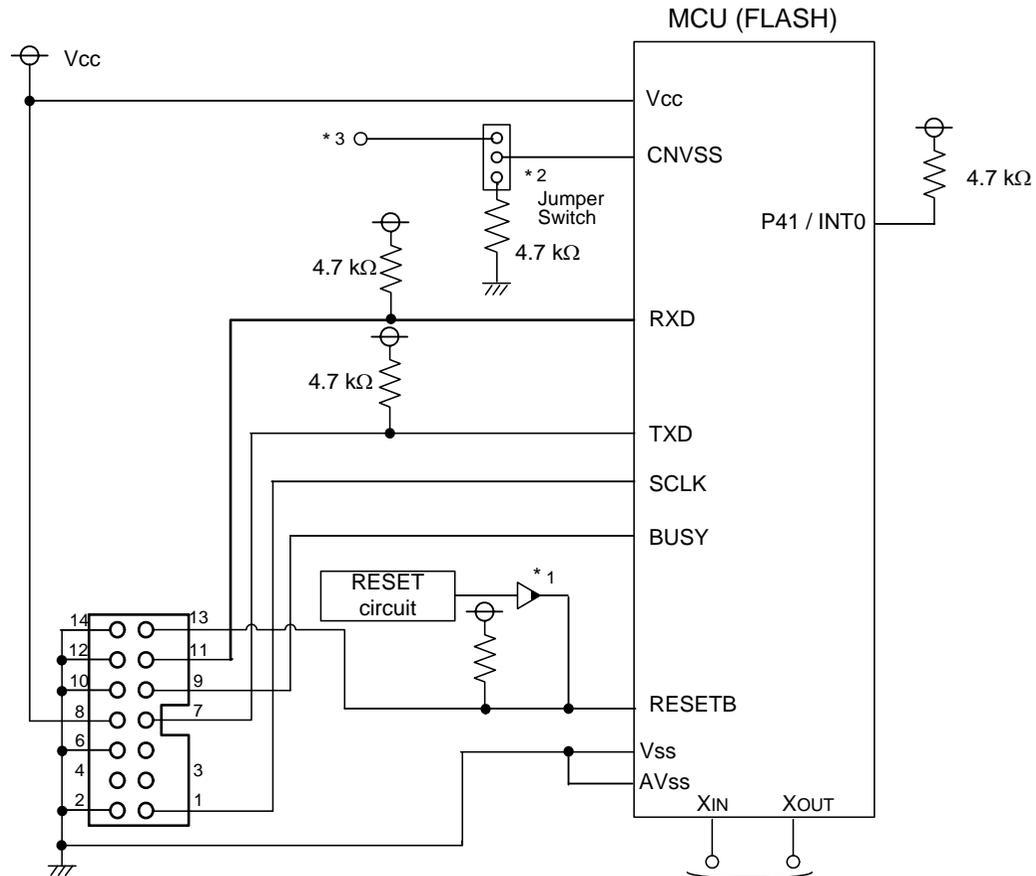

Set the same termination as the single-chip mode.

*1 : Open-collector buffer

*2 : When programming QzROM is performed, switch Vcc from CNVSS by a jumper switch. Execute pull-down handling in single-chip mode.

*3 : Vcc = 4.5 to 5.5 V: Connect to Vcc.
Vcc = 2.7 to 4.5 V: Supply 4.5 to 5.5 V.

Note: For the programming circuit, the wiring capacity of each signal pin must not exceed 47 pF.

Used pins for QzROM programming with E8a



E8a Pin No.	IC Socket Board (QzROM)	3803H Group (*1)	3823 Group	3850A Group 3858 Group	38D2 Group (*1)	38D5 Group (*1)
Applicable circuit diagram		(2)	(3)	(2)	(1),(2)	(1),(2)
1	ESCLK	P46/SCLK1	P42/INT0	P43/INT2 /SCMP2	P31/SCLK2	P42/SCLK1
3	VPP	CNVSS	P40	CNVSS	OSCSEL	OSCSEL
4	ESPGMB	P47/SRDY1 /CNTR2	P43/INT1	P40/CNTR1	P30/SRDY2	P43/SRDY1
7	ESDA	P45/TxD1	P44/RxD	P42/INT1	P32/TxD2	P41/TxD
8	E8VCC	VCC	VCC	VCC	VCC	VCC
9	BUSY	N.C.	N.C.	N.C.	N.C.	N.C.
11	RXD	N.C.	N.C.	N.C.	N.C.	N.C.
13	RESET	RESET	RESET	RESET	RESET	RESET
2, 6,10, 12,14	GND	VSS, AVSS	VSS, AVSS	VSS, AVSS	VSS, AVSS	VSS, AVSS

Products under development included

* Pin No.5,9,11 : N.C.

*1:To write data on the Flash ROM and QzROM using the same IC socket board / user board, connect Pin No. 4 and No. 9.

Used pins for QzROM programming with E8a

E8a Pin No.	IC Socket Board (QzROM)	7544 Group	7545 Group	7546 Group 7547 Group	7548 Group 7549 Group
Applicable circuit diagram		(2)	(2)	(2)	(2)
1	ESCLK	P12/SCLK	P20/INT0	P12/SCLK1	P06/SCLK
3	VPP	CNVSS	CNVSS	CNVSS	CNVSS
4	ESPGMB	P10/RxD	P06/KEY6	P10/RxD1 /CAP0	P07/SRDY
7	ESDA	P11/TxD	P07/KEY7	P11/TxD1	P10/AN0 /KEY0/CMP0
8	E8VCC	VCC	VCC VDDR	VCC	VCC
9	BUSY	N.C.	N.C.	N.C.	N.C.
11	RXD	N.C.	N.C.	N.C.	N.C.
13	RESET	RESET	RESET	RESET	RESET
2, 6, 10, 12, 14	GND	VSS	VSS	VSS	VSS

Products under development included

Used pins for FLASH programming with E8a



E8a Pin No.	IC Socket Board (FLASH)	3803H Group(*1) 3804H Group	38D2 Group (*1)	38D5 Group(*1)	7542 Group
Applicable circuit diagram		(2)	(2)	(2)	(2)
1	SCLK	P46/SCLK1	P31/SCLK2	P42/SCLK1	P06/SCLK2
3	CNVSS	CNVSS	OSCSEL	OSCSEL	CNVSS
4	ESPGMB	N.C.	N.C.	N.C.	N.C.
7	TXD	P45/TxD1	P32/TxD2	P41/TxD	P05/TxD2
8	VCC	VCC	VCC	VCC	VCC
9	BUSY	P47/SRDY1 /CNTR2	P30/SRDY2	P43/SRDY	P07/SRDY2
11	RXD	P44/RxD1	P33/RxD2	P40/RxD	P04/RxD2
13	RESET	RESET	RESET	RESET	RESET
2, 6,10, 12,14	GND	VSS, AVSS	VSS, AVSS	VSS, AVSS	VSS

Products under development included

* Pin No.4, 5 : N.C.

*1:To write data on the Flash ROM and QzROM using the same IC socket board / user board, connect Pin No. 4 and No. 9.



Renesas Technology Corp.

©2009. Renesas Technology Corp., All rights reserved.