RAA271084 PMIC EVB



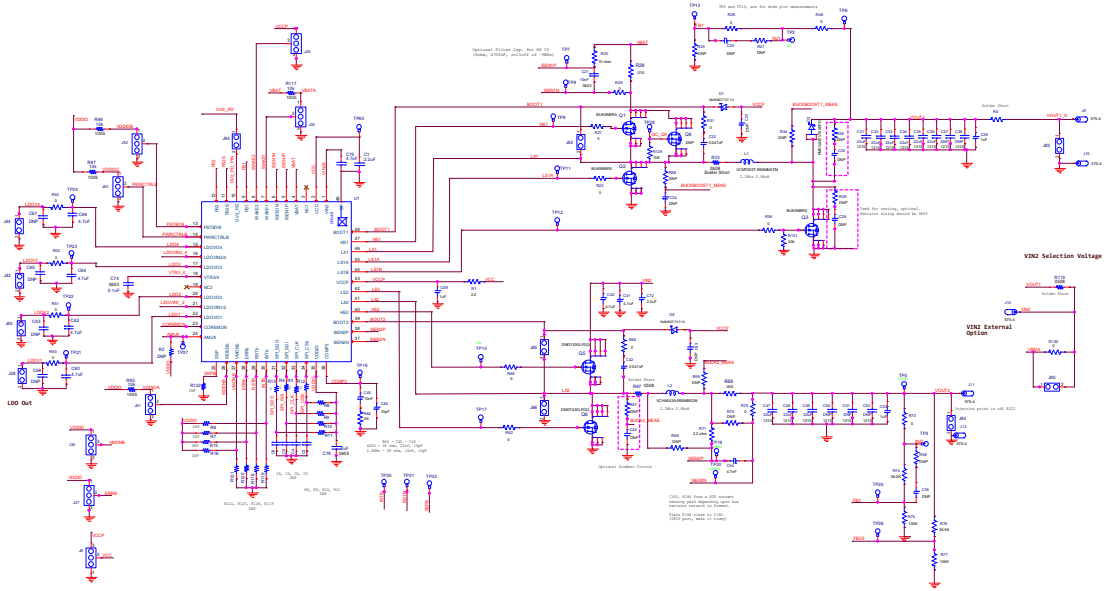

Output Headers









Option 1 is LDOVO1, IO voltage is based on LDOVO1
Option 2 is LDOVO2, IO voltage is based on LDOVO2
Option 3 is LDOVO3, IO voltage is based on LDOVO3
Option 4 is LDOVO4, IO voltage is based on LDOVO4
Option 5 is External, IO voltage is based on an External Voltage



Option 1 is LDOVO1, Tracker Target voltage is based on LDOVO1
Option 2 is LDOVO2, Tracker Target voltage is based on LDOVO2
Option 3 is LDOVO3, Tracker Target voltage is based on LDOVO3
Option 4 is LDOVO4, Tracker Target voltage is based on LDOVO4
Option 5 is External, Tracker Target voltage is based on an External Voltage



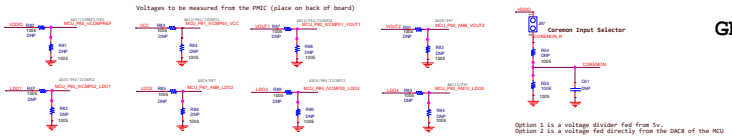

Option 1 is a voltage divider fed from 5v.
Option 2 is a voltage fed directly from the DACB of the MCU

GND Test Points
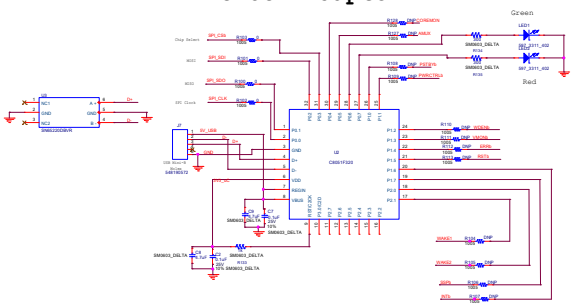
ISLUSB Adaptor