

ISL70419SEH

Single Event Effects Testing

AN1944
Rev 0.00
July 17, 2014

Introduction

The intense heavy ion environment encountered in space applications can cause a variety of transient and destructive effects in analog circuits, including single-event latch-up (SEL), single-event transients (SET) and single-event burnout (SEB). These effects can lead to system-level failures including disruption and permanent damage. For predictable and reliable system operation, these components have to be formally designed and fabricated for SEE hardness, followed by detailed SEE testing to validate the design. This report discusses the results of SEE testing of Intersil's ISL70419SEH.

Related Documents

- [ISL70419SEH](#) Data Sheet

Product Description

The ISL70419SEH contains four very high precision amplifiers featuring the perfect combination of low noise vs power consumption. These devices are fabricated in a 40V advanced bonded wafer SOI process using deep trench isolation, resulting in a fully isolated structure. This choice of process technology results in latch-up free performance, whether by electrical or single event caused. These devices were also designed for enhance single event transient response resulting in fast SET recovery.

A super-beta NPN input stage with input bias current cancellation provides low input bias current, low input offset voltage, low input noise voltage, and low 1/f noise corner frequency. These amplifiers also feature high open loop gain for excellent CMRR and THD+N performance. A complementary bipolar output stage enables high capacitive load drive without external compensation.

These amplifier are designed to operate over a wide supply range of 4.5V to 36V. Applications for these amplifiers include precision active filters, low noise front ends, loop filters, data acquisition and charge amplifiers.

The combination of high precision, low noise, low power and radiation tolerance provide the user with outstanding value and flexibility relative to similar competitive parts.

The part is packaged in a 14 lead hermetic ceramic flat pack and operates over the extended temperature range of -55°C to +125°C. A summary of key full temperature range and radiation specifications follow:

- Input Offset Voltage 110µV, max.
- Offset Voltage Drift 1µV/°C, max.
- Input Offset Current 10nA, max.
- Input Bias Current 15nA, max.
- Supply Current/Amplifier 0.75mA, max.
- Gain Bandwidth Product 1.5MHz, typ.

Key SEE Test Results

- SOI process results in single event latch-up immunity
- No SEB up to 36V supply, LET = 86.4MeV • cm²/mg
- Ultra fast recovery time from SET: < 10µs

SEE Test Objective

The objective of SEE testing of the ISL70419SEH were to evaluate its susceptibility to destructive events induced by single event effects, such as single event burnout and to determine its SET behavior.

SEE Test Facility

Testing was performed at the Texas A&M University (TAMU) Cyclotron Institute heavy ion facility. This facility is coupled to a K500 super-conducting cyclotron, which is capable of generating a wide range of test particles with the various energy, flux and fluence levels needed for advanced radiation testing.

SEE Test Procedure

The part was tested for single event burnout, using Au ions at 0°C incidence (LET = 86.4MeV • cm²/mg) with a case temperature of +125°C, and single event transient characterized using Ar, Kr, Ag and Pr ions with a case temperature of +25°C.

The device under test (DUT) was mounted in the beam line and irradiated with heavy ions of the appropriate species. The parts were assembled in 14 lead dual in-line packages with the metal lid removed for beam exposure. The beam was directed onto the exposed die and the beam flux, beam fluence and errors in the device outputs were measured.

The tests were controlled remotely from the control room. All input power was supplied from portable power supplies connected via cable to the DUT. The supply currents were monitored along with the device outputs. All currents were measured with digital ammeters, while all the output waveforms were monitored on a digital oscilloscope for ease of identifying the different types of SEE, displayed by the part. Events were captured by triggering on changes in the output.

Cross Section Calculation

Cross sections (CS) are calculated as shown by [Equation 1](#):

$$CS (LET) = N/F \quad (EQ. 1)$$

where:

- CS is the SET cross section (cm^2), expressed as a function of the heavy ion LET
- LET is the linear energy transfer in $\text{MeV}\cdot\text{cm}^2/\text{mg}$, corrected according to the incident angle, if any
- N is the total number of SET events
- F is fluence in particles/ cm^2

A value of $1/F$ is the assumed cross section when no event is observed.

Single Event Burnout Results

The first testing sequence looked at destructive effects due to burnout. A burnout condition is indicated by a permanent change in the device supply current after application of the beam. If the increased current can be reset by cycling power, it is termed a latch-up. No burnout was observed using Au ions at 0° up a supply voltage of $\pm 18\text{V}$. Testing was performed on four parts at $T_C = +125^\circ\text{C}$. All parts commenced testing with $V_S = \pm 18\text{V}$ and on subsequent tests V_S voltage was increased by 2V until failure. All test runs were run to a fluence of $2.5 \times 10^6/\text{cm}^2$. A power supply applied a DC voltage of 200mV to the non-inverting inputs of the amplifiers during the test. Functionality of all outputs were verified after exposure. I_{DD} and I_{EE} were recorded pre and post exposure and summed up. A 5% change in total supply current indicates permanent damage to the op amp. Test results demonstrated that all parts passed with $V_S = \pm 18\text{V}$ however, failed when the supply voltage was increased to $V_S = \pm 19\text{V}$. Test data for $V_S = \pm 18\text{V}$ and $V_S = \pm 19\text{V}$ is shown in [Tables 1](#) and [2](#), respectively.

Single Event Transient Results

Test Setup

A simplified schematic of the configuration of each op amp on board used during testing is shown in [Figure 1](#).

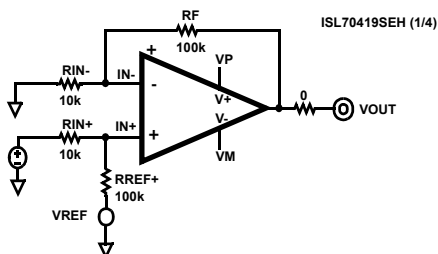


FIGURE 1. ISL70419SEH SEE TEST SCHEMATIC

Each operational amplifier was set up in a non-inverting operation with $G = 10\text{V}/\text{V}$. The IN- inputs were grounded and the input signal was applied to the IN+ pin. The reference input was also grounded. All the outputs were fed into a summer op amp which was out of the beam line. The output of the summer amp was used to trigger the scope, while channels 1 through 4 of the scope capture changes on the output of op amp A, B, C, and D of each device. The complete board schematic and silk screen of the board are included in Appendix A.

Biasing used for SET test runs was $V_S = \pm 5\text{V}$ and $\pm 15\text{V}$. Similar to SEL/B testing, a DC voltage of 200mV was applied to the non-inverting inputs of the amplifiers. Signals from the switch board in the control room were connected to four LECROY oscilloscopes to capture SETs on devices 5, 6, 7 and 8. Summary of the scope settings are as follows:

TRIGGER CONNECTIONS

- Scope 1 is set to capture Device 5
- Scope 2 is set to capture Device 6
- Scope 3 is set to capture Device 7
- Scope 4 is set to capture Device 8

CHANNEL CONNECTION ON ALL SCOPES FOR $V_S = \pm 5\text{V}$

- CH1 = OUTA 1V/div, CH2 = OUTB 1V/div
- CH3 = OUTC 1V/div, CH4 = OUTD 1V/div
- External trigger connected to output of summer amplifier

CHANNEL CONNECTION ON ALL SCOPES FOR $V_S = \pm 15\text{V}$

- CH1 = OUTA 2V/div, CH2 = OUTB 2V/div
- CH3 = OUTC 2V/div, CH4 = OUTD 2V/div
- External trigger connected to output of summer amplifier

Events are recorded when movement on output during beam exposure exceeds the definition of a SET. For the ISL70419SEH a SET is a transient that exceeds the set window trigger of $\pm 200\text{mV}$ for $V_S = \pm 5\text{V}$ and for $V_S = \pm 15\text{V}$.

Cross Section Results

One approach to characterize the SET response of an integrated circuit is to represent the data on a LET threshold plot. [Figure 2](#) shows the overall cross section of the four devices tested versus the LET level, for $V_S = \pm 5\text{V}$ and $\pm 15\text{V}$. It can be noted that the cross section is independent of the supply voltage. Data from [Figure 2](#) is represented in [Table 3](#). [Figures 3](#) and [4](#) show the LET threshold plot of each device independently for $V_S = \pm 5\text{V}$ and $\pm 15\text{V}$. The graphs also show that there is no part-to-part sensitivity as the graphs lie almost directly on top of each other. Complete data for [Figures 3](#) and [4](#) are available in Appendix A.

TABLE 1. ISL70419SEH DETAILS OF SEB/L TESTS AT VS = LET = 86.4MeV · cm²/mg

TEMP (°C)	LET (MeV · cm ² /mg)	SUPPLY VOLTAGE (V)	SUPPLY CURRENT PRE-EXPOSURE (mA)	SUPPLY CURRENT POST-EXPOSURE (mA)	DESTRUCTIVE EVENTS	CUMULATIVE FLUENCE (PARTICLES/cm ²)	CUMULATIVE CROSS SECTION (cm ²)	DEVICE ID	SEB
+125	86.4	±18	4.901	4.949	0	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	1	PASS
+125	86.4	±18	4.701	4.842	0	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	2	PASS
+125	86.4	±18	5.263	5.280	0	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	3	PASS
+125	86.4	±18	5.335	5.340	0	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	4	PASS
TOTAL EVENTS					0				
OVERALL FLUENCE						1.0 x 10 ⁷			
OVERALL CS							1.25 x 10 ⁻⁷		
TOTAL UNITS								4	

TABLE 2. ISL70419SEH DETAILS OF SEB/L TESTS AT LET = 86.4MeV · cm²/mg

TEMP (°C)	LET (MeV · cm ² /mg)	SUPPLY VOLTAGE (V)	SUPPLY CURRENT PRE-EXPOSURE (mA)	SUPPLY CURRENT POST-EXPOSURE (mA)	DESTRUCTIVE EVENTS	CUMULATIVE FLUENCE (PARTICLES/cm ²)	CUMULATIVE CROSS SECTION (cm ²)	DEVICE ID	SEB
+125	86.4	±19	4.980	18.780	1	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	1	FAIL
+125	86.4	±19	4.877	18.146	1	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	2	FAIL
+125	86.4	±19	5.318	19.550	1	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	3	FAIL
+125	86.4	±19	5.377	19.900	1	2.5 x 10 ⁶	5.0 x 10 ⁻⁷	4	FAIL

TABLE 3. DETAILS OF THE LET THRESHOLD PLOT OF THE ISL70419SEH

SUPPLY VOLTAGE (V)	ION	ANGLE	EFFECTIVE LET (MeV · cm ² /mg)	FLUENCE PER RUN (PARTICLES/cm ²)	NUMBER OF DEVICES TESTED	TOTAL SET	EVENT CS (cm ²)
±5	Ar	0	8.5	2.0 x 10 ⁶	4	690	8.63 x 10 ⁻⁵
±5	Kr	0	28	2.0 x 10 ⁶	4	8566	1.07 x 10 ⁻³
±5	Ag	0	43	2.0 x 10 ⁶	4	9025	1.13 x 10 ⁻³
±5	Pr	0	59.2	2.0 x 10 ⁶	4	9588	1.2 x 10 ⁻³
±15	Ar	0	8.5	2.0 x 10 ⁶	4	695	8.69 x 10 ⁻⁵
±15	Kr	0	28	2.0 x 10 ⁶	4	8103	1.01 x 10 ⁻³
±15	Ag	0	43	2.0 x 10 ⁶	4	9344	1.17 x 10 ⁻³
±15	Pr	0	59.2	2.0 x 10 ⁶	4	9735	1.22 x 10 ⁻³

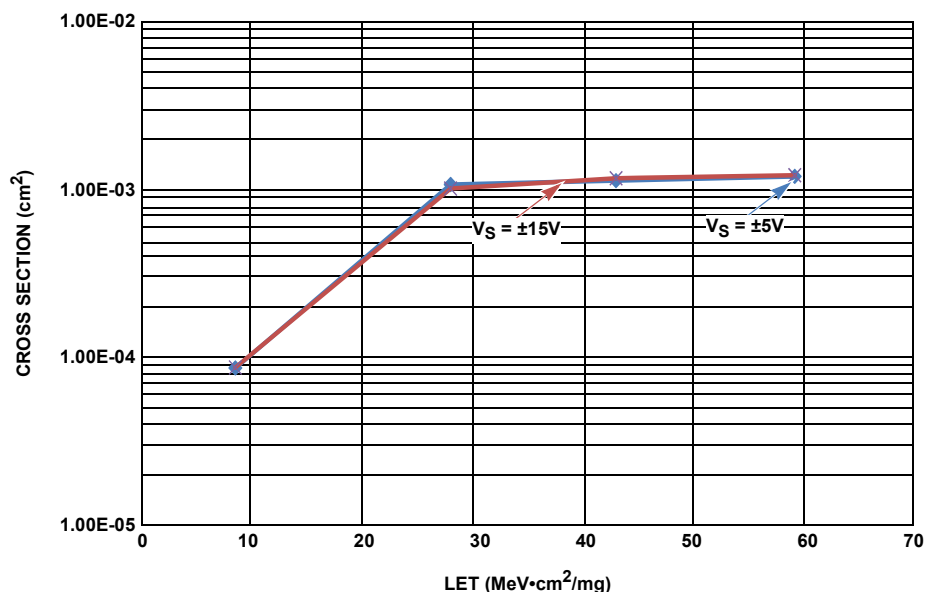
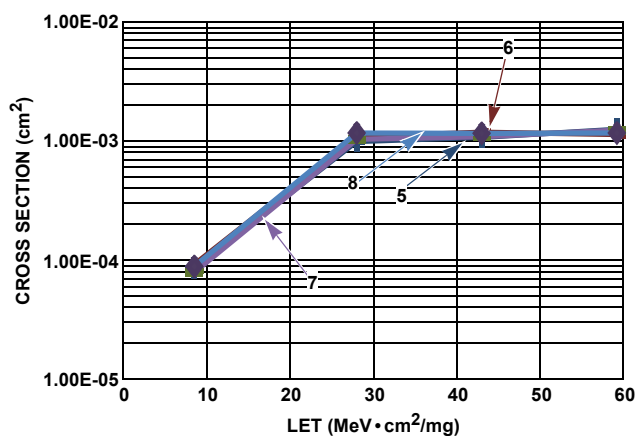
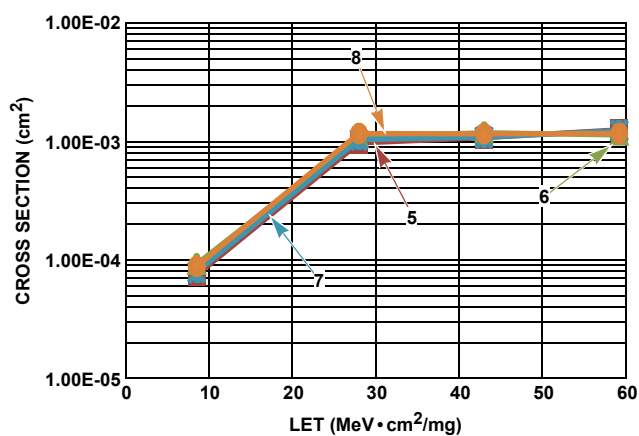


FIGURE 2. SET CROSS SECTION vs LINEAR ENERGY TRANSFER vs SUPPLY VOLTAGE

FIGURE 3. SET CROSS SECTION vs LET WITH $V_S = \pm 5V$ FOR DEVICES 5, 6, 7 and 8FIGURE 4. SET CROSS SECTION vs LET WITH $V_S = \pm 15V$ FOR DEVICES 5, 6, 7 and 8

Single Event Transient Response

The ISL70419SEH was designed for single event transient (SET) mitigation with a goal of recovering from an SET in 10 μ s or less. [Figures 5](#) through [16](#) plot the SET duration outside the ± 200 mV window versus the extreme deviation for the various devices tested and channels. This data is representative of the typical response of the ISL70419SEH and provides a quick way of categorizing the SET by magnitude and duration. All captured SET had durations of equal or less than 10 μ s outside of the ± 200 mV window about the nominal amplifier output of 2V.

There are both positive and negative deviation on most of the captures, while the rest of the transients were either only positive or negative. [Figures 17](#) through [28](#) are the composite plots of the scatter plots shown in [Figures 5](#) through [16](#).

Single Event Transient Recovery Time vs Peak Deviation, $V_S = \pm 5V$

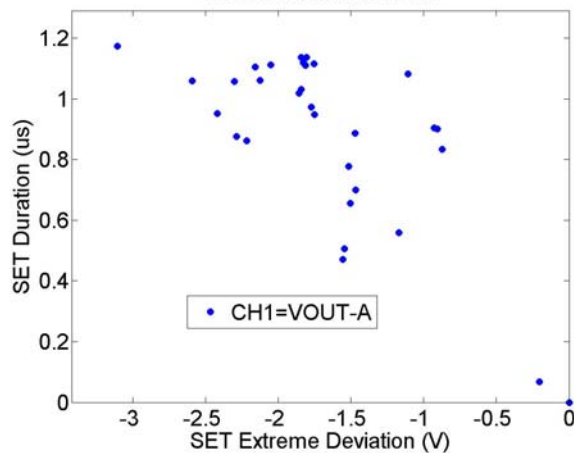


FIGURE 5. DEVICE 5, CHANNEL A, RUN 101, $V_S = \pm 5V$,
LET = $8.5 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

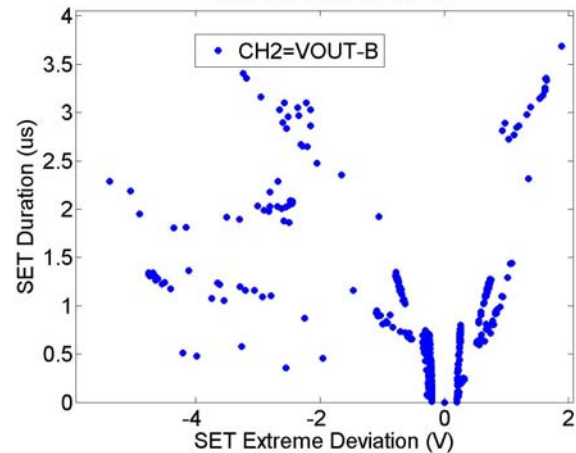


FIGURE 6. DEVICE 6, CHANNEL B, RUN 201, $V_S = \pm 5V$,
LET = $28 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

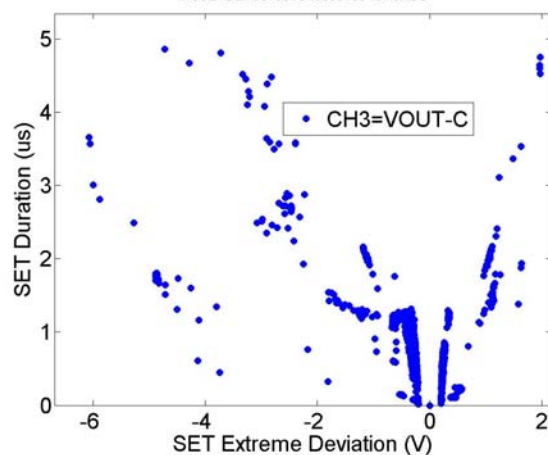


FIGURE 7. DEVICE 7, CHANNEL C, RUN 301, $V_S = \pm 5V$,
LET = $43 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

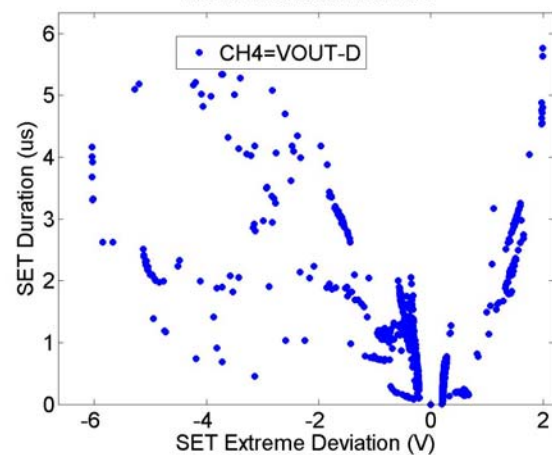


FIGURE 8. DEVICE 8, CHANNEL D, RUN 307, $V_S = \pm 5V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

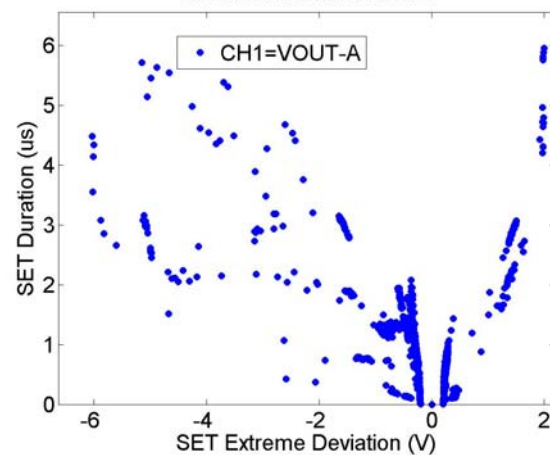


FIGURE 9. DEVICE 7, CHANNEL A, RUN 307, $V_S = \pm 5V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

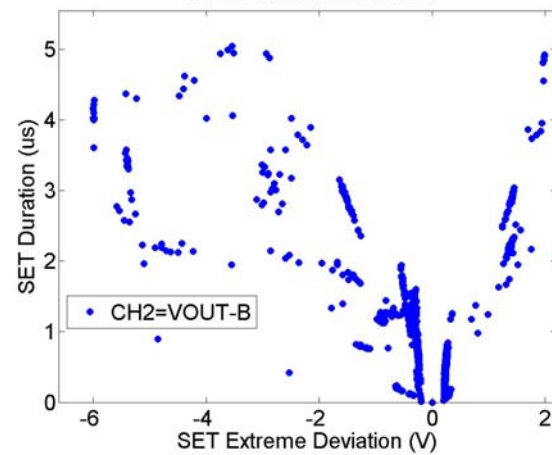


FIGURE 10. DEVICE 6, CHANNEL B, RUN 306, $V_S = \pm 5V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

Single Event Transient Recovery Time vs Peak Deviation, $V_S = \pm 15V$

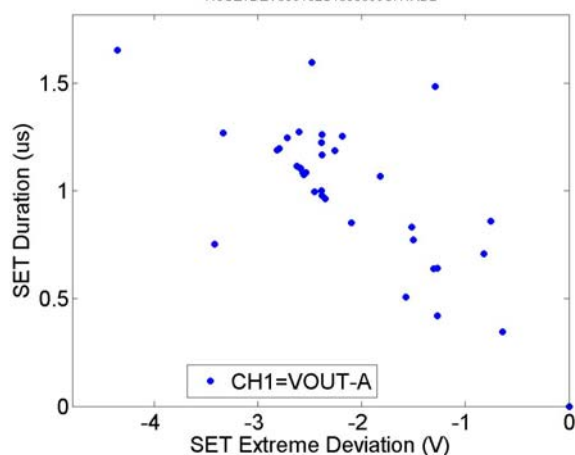


FIGURE 11. DEVICE 5, CHANNEL A, RUN 102, $V_S = \pm 15V$,
LET = $8.5 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

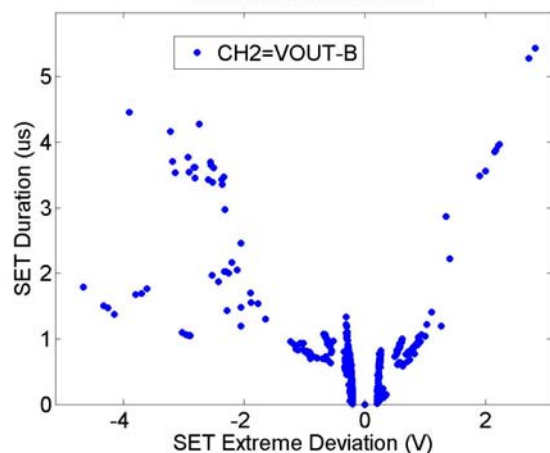


FIGURE 12. DEVICE 6, CHANNEL B, RUN 202, $V_S = \pm 15V$,
LET = $28 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

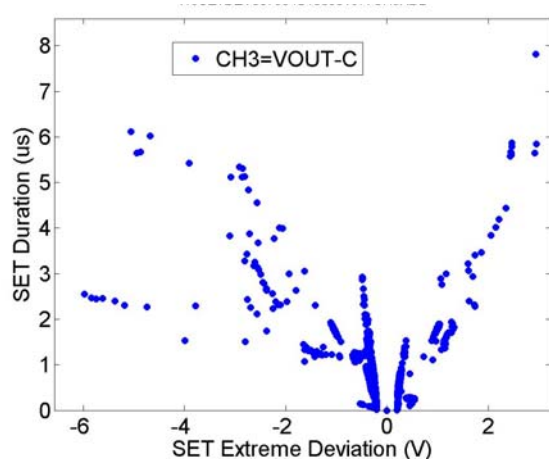


FIGURE 13. DEVICE 7, CHANNEL C, RUN 304, $V_S = \pm 15V$,
LET = $43 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

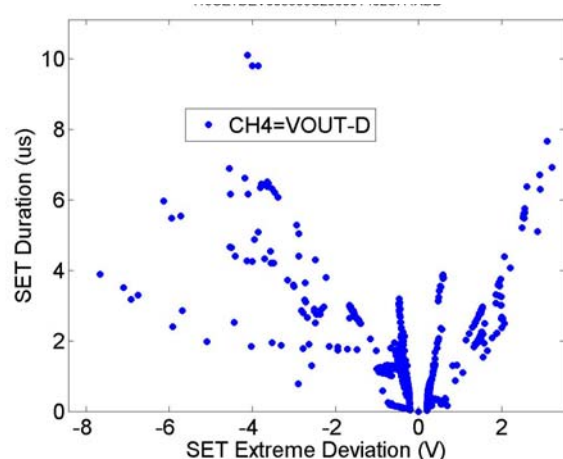


FIGURE 14. DEVICE 8, CHANNEL D, RUN 308, $V_S = \pm 15V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

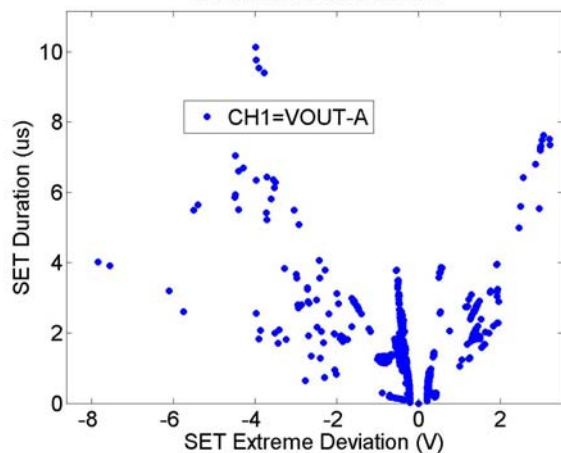


FIGURE 15. DEVICE 7, CHANNEL A, RUN 308, $V_S = \pm 15V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

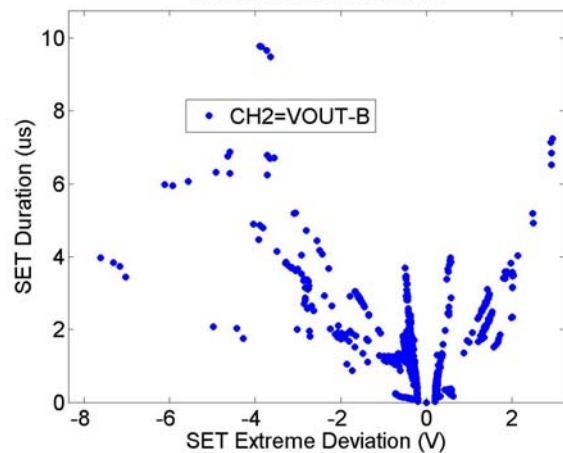


FIGURE 16. DEVICE 8, CHANNEL B, RUN 308, $V_S = \pm 15V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

Single Event Transient Composite Plots, $V_S = \pm 5V$

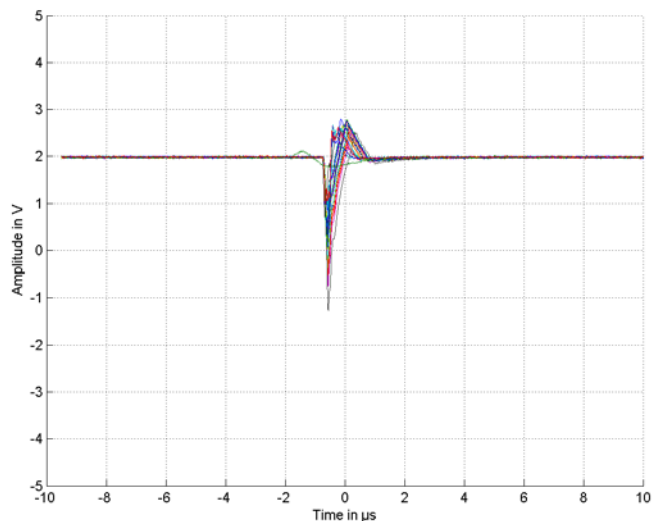


FIGURE 17. DEVICE 5, CHANNEL A, RUN 101, $V_S = \pm 5V$,
LET = $8.5 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

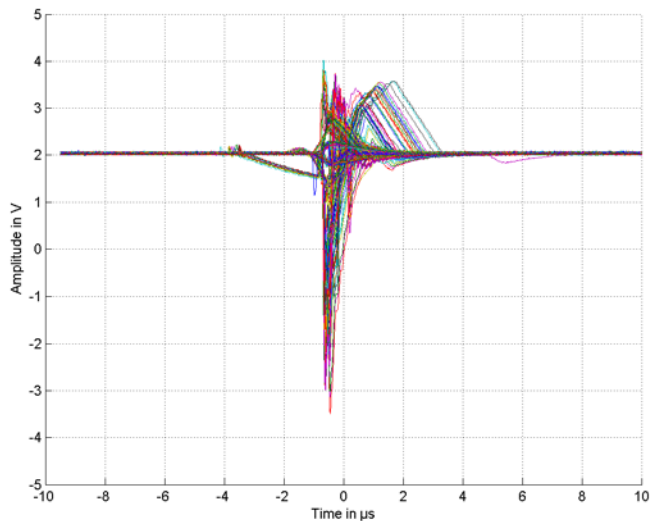


FIGURE 18. DEVICE 6, CHANNEL B, RUN 201, $V_S = \pm 5V$,
LET = $28 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

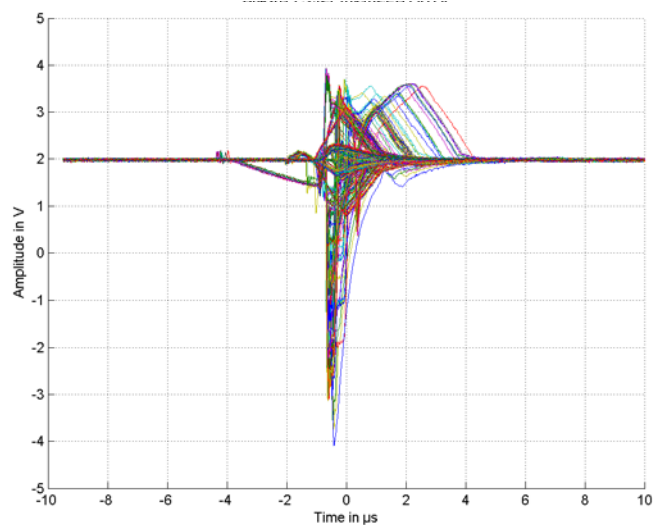


FIGURE 19. DEVICE 7, CHANNEL C, RUN 301, $V_S = \pm 5V$,
LET = $43 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

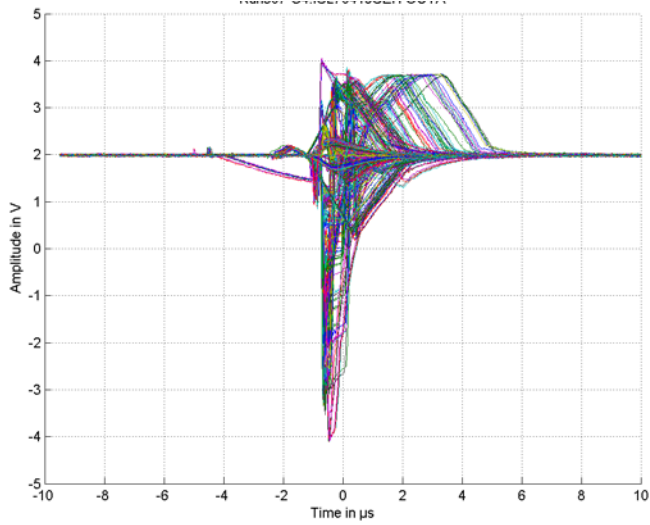


FIGURE 20. DEVICE 8, CHANNEL D, RUN 307, $V_S = \pm 5V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

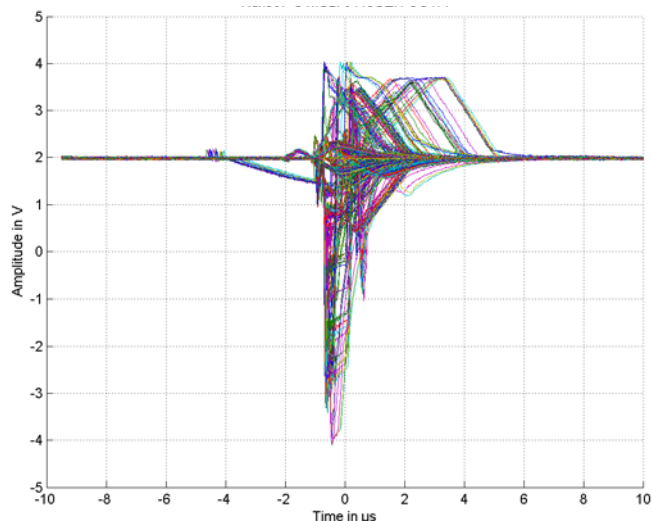


FIGURE 21. DEVICE 7, CHANNEL A, RUN 307, $V_S = \pm 5V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

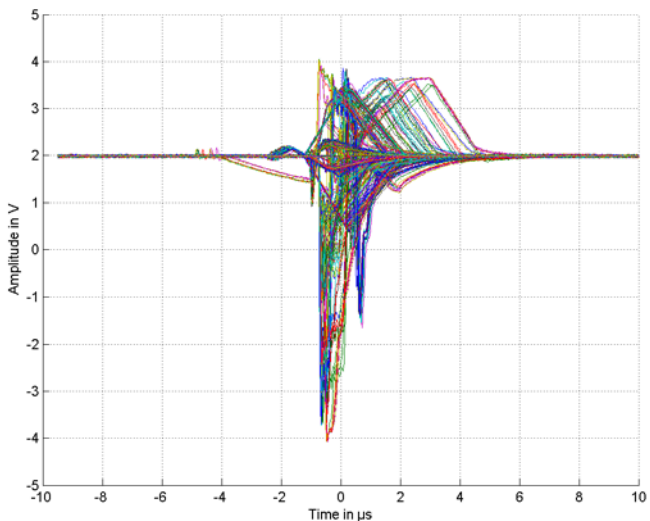


FIGURE 22. DEVICE 6, CHANNEL B, RUN 306, $V_S = \pm 5V$,
LET = $59.2 \text{ MeV} \cdot \text{cm}^2/\text{mg}$

Single Event Transient Recovery Composite Plots, $V_S = \pm 15V$

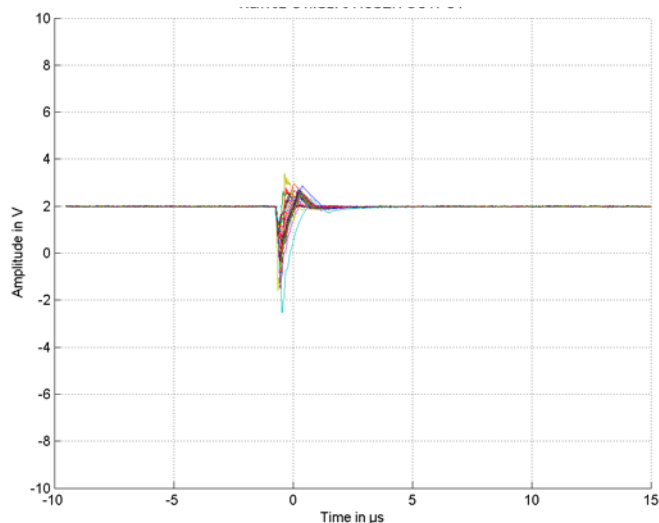


FIGURE 23. DEVICE 5, CHANNEL A, RUN 102, $V_S = \pm 15V$,
LET = $8.5MeV \cdot cm^2/mg$

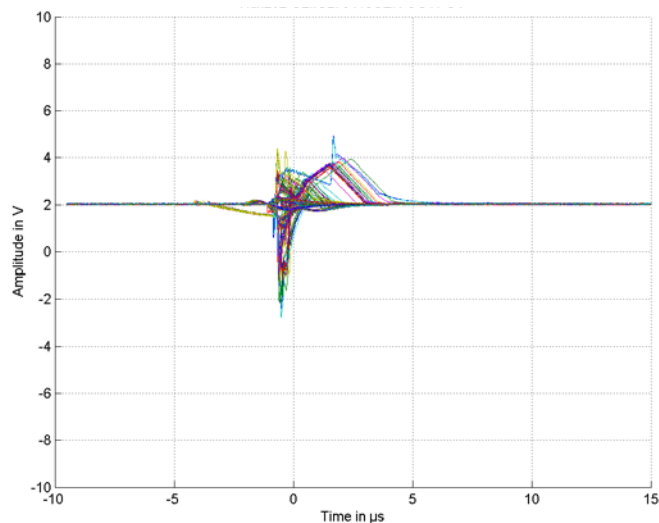


FIGURE 24. DEVICE 6, CHANNEL B, RUN 202, $V_S = \pm 15V$,
LET = $28MeV \cdot cm^2/mg$

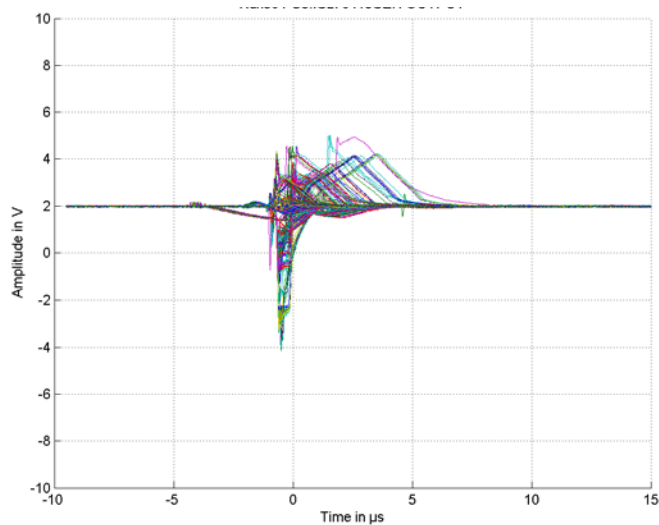


FIGURE 25. DEVICE 7, CHANNEL C, RUN 304, $V_S = \pm 15V$,
LET = $43MeV \cdot cm^2/mg$

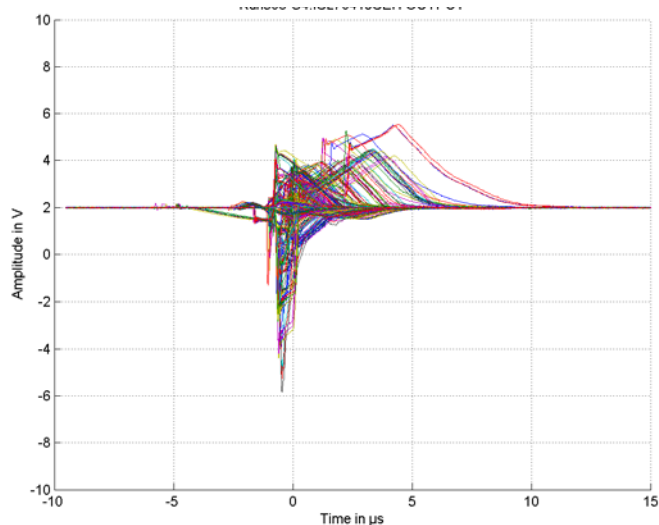


FIGURE 26. DEVICE 8, CHANNEL D, RUN 308, $V_S = \pm 15V$,
LET = $59.2MeV \cdot cm^2/mg$

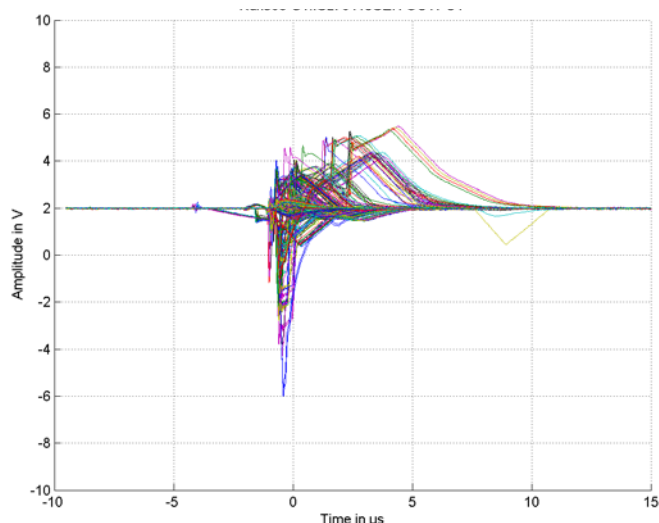


FIGURE 27. DEVICE 7, CHANNEL A, RUN 308, $V_S = \pm 15V$,
LET = $59.2MeV \cdot cm^2/mg$

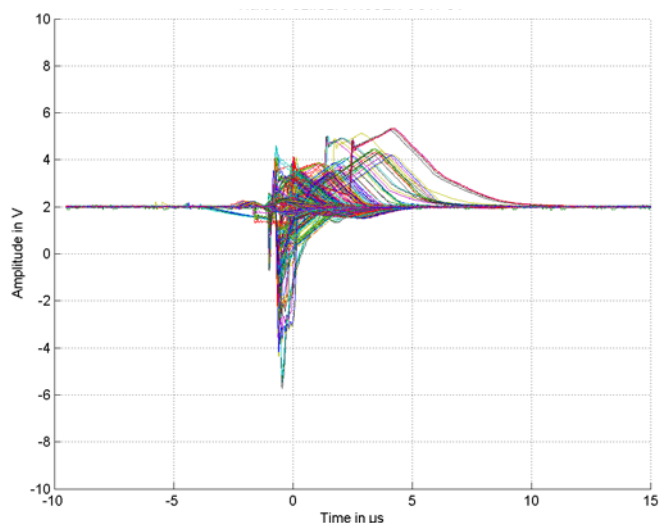


FIGURE 28. DEVICE 8, CHANNEL B, RUN 308, $V_S = \pm 15V$,
LET = $59.2MeV \cdot cm^2/mg$

There is correlation to the duration of the SET with respect to the linear energy transfer. Lower LET values e.g. $8.5\text{MeV} \cdot \text{cm}^2/\text{mg}$ had the quicker response times returning the SET window of $\pm 200\text{mV}$. As the LET increases so does the recovery time until it saturates at $\text{LET} = 43\text{MeV} \cdot \text{cm}^2/\text{mg}$. The same correlation is found on the extreme voltage deviation versus LET. Reviewing [Figures 5](#) through [16](#) shows that lower LET have a smaller deviation than the SETs caused by higher LET values.

Another interesting note is the correlation of channel-to-channel common SET occurrences at higher LET values. For example on run 305, which is tested with $\text{LET} = 59.2\text{MeV} \cdot \text{cm}^2/\text{mg}$, roughly 75% of the SET were common on all channels. For run 101, which is tested with $\text{LET} = 8.5\text{MeV} \cdot \text{cm}^2/\text{mg}$, 0% of the SET were common to all four channels. This correlation start to occur when the $\text{LET} = 28\text{MeV} \cdot \text{cm}^2/\text{mg}$. An explanation of the commonality is that a device or circuit which is common to all amplifiers is being upset. For example the ESD clamps which are common to all four amplifiers within the IC, could be susceptible at higher LET and causing SETs on the output of all four channels. [Figures 29](#) and [30](#) are SETs of Channel 1 (OUT A) and Channel 2 (OUT B) of device 5 in run 201. These events occurred simultaneously on all four channels.

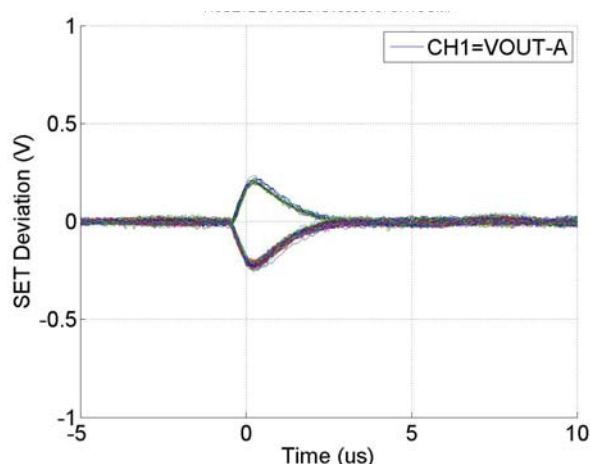


FIGURE 29. CHANNEL 1 COMPOSITE PLOT OF COMMON SETs

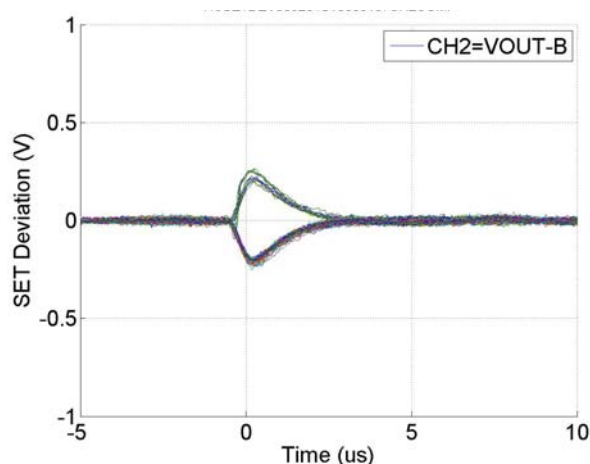


FIGURE 30. CHANNEL 2 COMPOSITE PLOT OF COMMON SETs

Summary

Single Event Burnout

No single event burnout (SEB) was observed for the device up to an LET of $86.4\text{MeV} \cdot \text{cm}^2/\text{mg}$ ($+125^\circ\text{C}$) at a maximum voltage supply of $V_S = \pm 18\text{V}$. This gives 20% margin on the recommended supply voltage of $V_S = \pm 15\text{V}$. Since the operational amplifier has no internal ground reference, the 36V supply range can be partitioned as desired, for example have a single supply where the V^+ pin can be tied to 36V and the V^- pin tied to ground (0V).

It is also not surprising that since the process is an SOI process, there was no latch-up observed on the device.

Single Event Transient

Based on the results presented, the ISL70419SEH op amp offers advantages over the competitors part by having better SET performance yet keeping the high accuracy of a precision op amp. The length of worst case SETs can be $6\mu\text{s}$ for devices with $V_S = \pm 5\text{V}$ and $10\mu\text{s}$ for devices with $V_S = \pm 15\text{V}$. This part does not experience the long recovery time ($>100\mu\text{s}$) during a single event transient seen on other competitor op amps in a comparator application. This may be explained by the higher drive capability of the ISL70419SEH and its ability to drive highly capacitive loads. Magnitude of the deviation for $V_S = \pm 5\text{V}$ was to 1V below the rail in the positive direction and 1V above the rail in the negative direction, limited by the VOH and VOL specifications of the amplifier. For amplifiers supplied with a $V_S = \pm 15\text{V}$, the transient excursions were much larger, however they do not extend to the expected VOH or VOL levels of $\pm 13.5\text{V}$. All the transients observed were 8.5V deviations or less with all the larger transient occurring in the negative direction. Recovery time of the transients were less than or equal to $10\mu\text{s}$.

Overall, the ISL70419SEH is very well behaved in a heavy ion environment. In space flight applications, the ISL70419SEH should not require filtering or other types of SET mitigation techniques. The ISL70419SEH offers a competitive advantage over other rad hard op amps by offering the following:

- No single event burnout up to $\pm 36\text{V}$
- SOI process for latch-up immunity
- Fast recovery from single event transients

Appendix A

Appendix A includes the data from [Figures 3](#) and [4](#) in tabular format, complete test schematic, and board silk screen images.

TABLE 4. DATA OF CHANNEL CROSS SECTION OF THE ISL70419SEH REPRESENTED IN [FIGURE 3](#)

SUPPLY VOLTAGE (V)	LET (MeV · cm ² /mg)	DEVICE	RUN NUMBER	FLUENCE PER RUN (PARTICLES/cm ²)	EVENTS	EVENT CS (cm ²)
± 5	8.5	5	101	2.0 × 10 ⁶	171	8.55 × 10 ⁻⁵
± 5	28	5	201	2.0 × 10 ⁶	1988	9.94 × 10 ⁻⁴
± 5	43	5	301	2.0 × 10 ⁶	2155	1.08 × 10 ⁻³
± 5	59.2	5	306	2.0 × 10 ⁶	2511	1.26 × 10 ⁻³
± 5	8.5	6	101	2.0 × 10 ⁶	184	9.20 × 10 ⁻⁵
± 5	28	6	201	2.0 × 10 ⁶	2173	1.09 × 10 ⁻³
± 5	43	6	301	2.0 × 10 ⁶	2373	1.19 × 10 ⁻³
± 5	59.2	6	306	2.0 × 10 ⁶	2268	1.13 × 10 ⁻³
± 5	8.5	7	103	2.0 × 10 ⁶	158	7.90 × 10 ⁻⁵
± 5	28	7	203	2.0 × 10 ⁶	2074	1.04 × 10 ⁻³
± 5	43	7	303	2.0 × 10 ⁶	2172	1.09 × 10 ⁻³
± 5	59.2	7	307	2.0 × 10 ⁶	2472	1.24 × 10 ⁻³
± 5	8.5	8	103	2.0 × 10 ⁶	177	8.85 × 10 ⁻⁵
± 5	28	8	203	2.0 × 10 ⁶	2331	1.17 × 10 ⁻³
± 5	43	8	303	2.0 × 10 ⁶	2325	1.16 × 10 ⁻³
± 5	59.2	8	307	2.0 × 10 ⁶	2337	1.17 × 10 ⁻³

TABLE 5. DATA OF CHANNEL CROSS SECTION OF THE ISL70419SEH REPRESENTED IN [FIGURE 4](#)

SUPPLY VOLTAGE (V)	LET (MeV · cm ² /mg)	DEVICE	RUN NUMBER	FLUENCE PER RUN (PARTICLES/cm ²)	EVENTS	EVENT CS (cm ²)
± 15	8.5	5	102	2.0 × 10 ⁶	149	7.45 × 10 ⁻⁵
± 15	28	5	202	2.0 × 10 ⁶	1942	9.71 × 10 ⁻⁴
± 15	43	5	302	2.0 × 10 ⁶	2273	1.14 × 10 ⁻³
± 15	59.2	5	305	2.0 × 10 ⁶	2703	1.35 × 10 ⁻³
± 15	8.5	6	102	2.0 × 10 ⁶	170	8.50 × 10 ⁻⁵
± 15	28	6	202	2.0 × 10 ⁶	2082	1.04 × 10 ⁻³
± 15	43	6	302	2.0 × 10 ⁶	2362	1.18 × 10 ⁻³
± 15	59.2	6	305	2.0 × 10 ⁶	2561	1.28 × 10 ⁻³
± 15	8.5	7	104	2.0 × 10 ⁶	178	8.90 × 10 ⁻⁵
± 15	28	7	204	2.0 × 10 ⁶	1990	9.95 × 10 ⁻⁴
± 15	43	7	304	2.0 × 10 ⁶	2331	1.17 × 10 ⁻³

TABLE 5. DATA OF CHANNEL CROSS SECTION OF THE ISL70419SEH REPRESENTED IN [FIGURE 4 \(CONTINUED\)](#)

SUPPLY VOLTAGE (V)	LET (MeV · cm ² /mg)	DEVICE	RUN NUMBER	FLUENCE PER RUN (PARTICLES/cm ²)	EVENTS	EVENT CS (cm ²)
± 15	59.2	7	308	2.0 x 10 ⁶	2301	1.15 x 10 ⁻³
± 15	8.5	8	104	2.0 x 10 ⁶	198	9.90 x 10 ⁻⁵
± 15	28	8	204	2.0 x 10 ⁶	2089	1.04 x 10 ⁻³
± 15	43	8	304	2.0 x 10 ⁶	2378	1.19 x 10 ⁻³
± 15	59.2	8	308	2.0 x 10 ⁶	2170	1.09 x 10 ⁻³

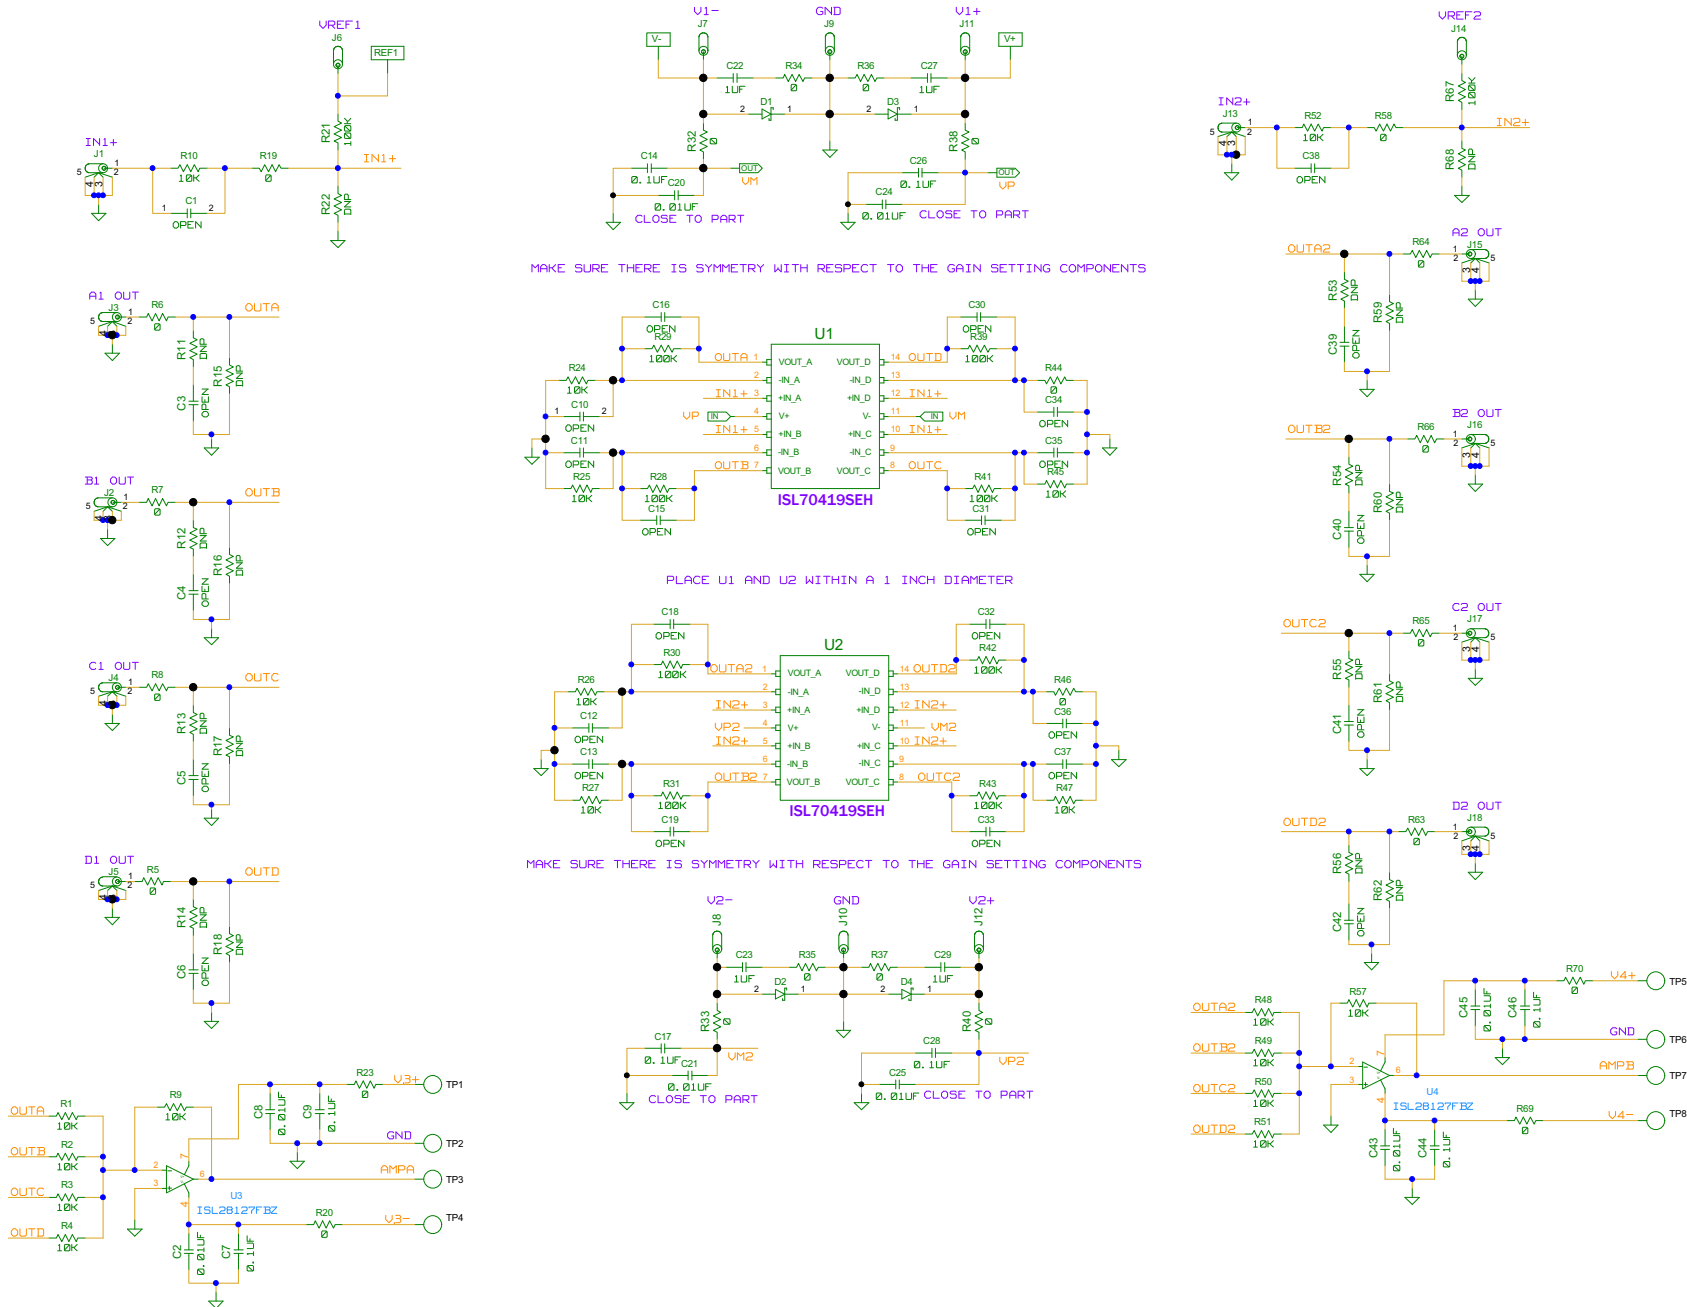


FIGURE 31. ISL70419SEH SEE TEST BOARD SCHEMATIC

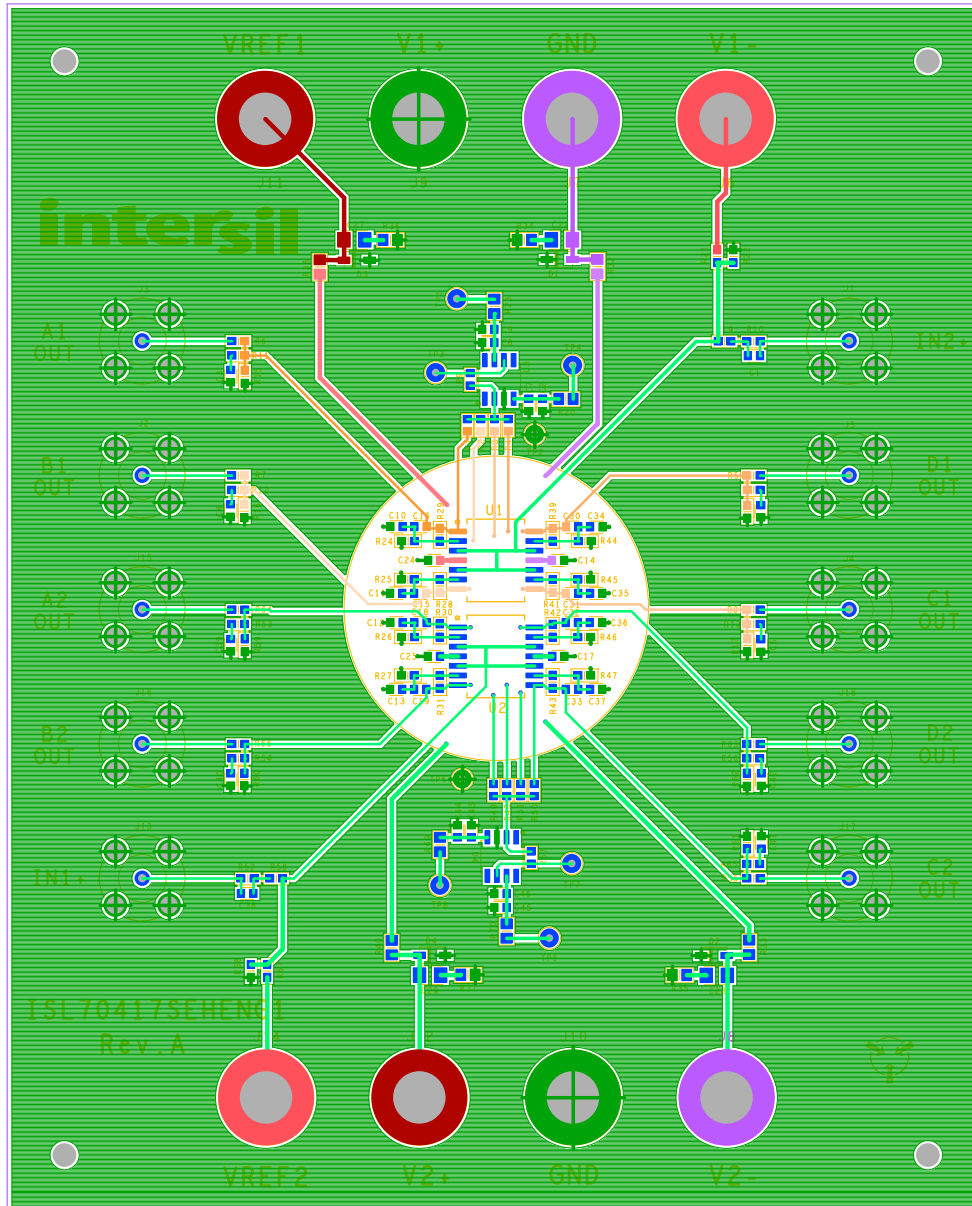


FIGURE 32. ISL70419SEH SEE TEST BOARD TOP VIEW

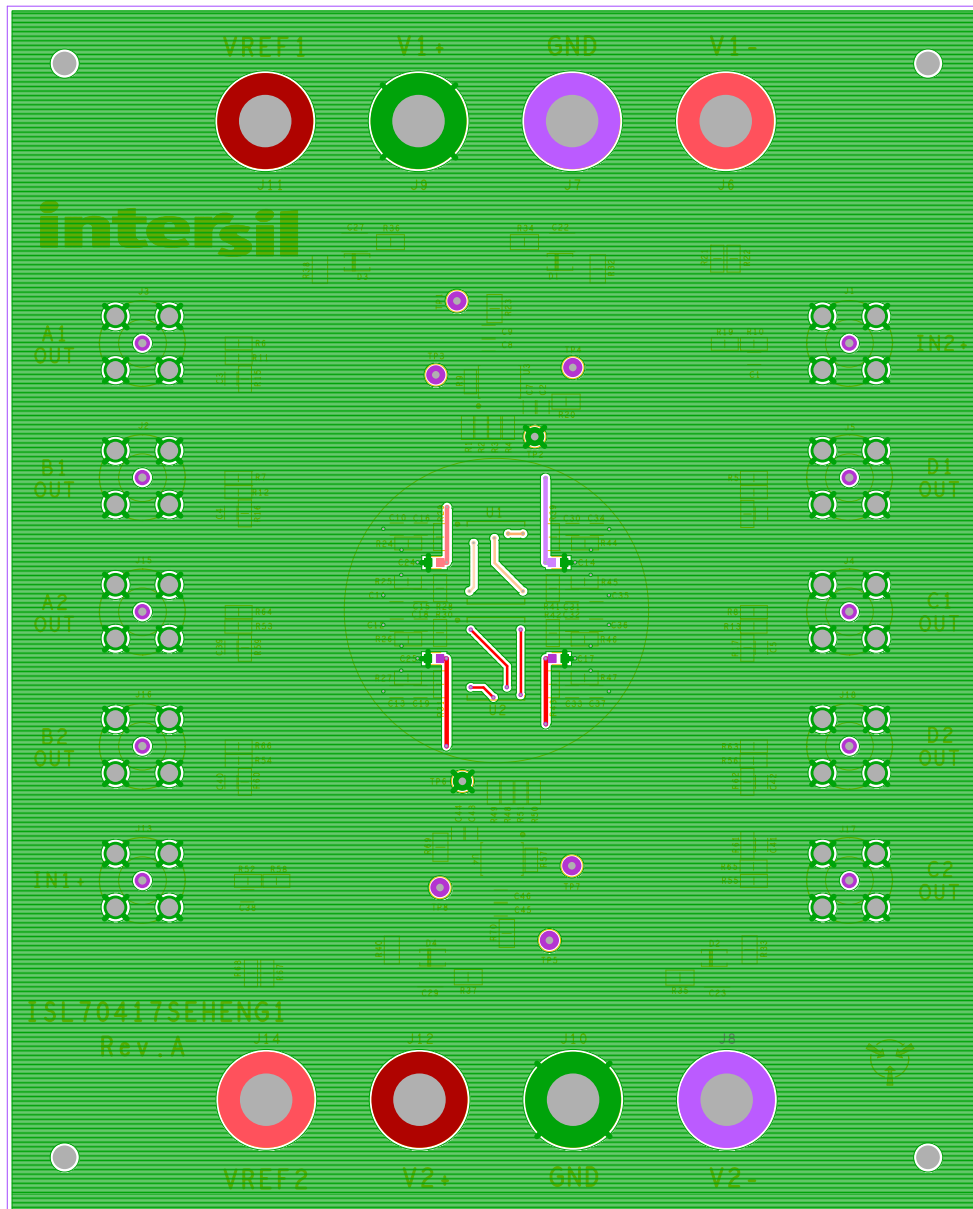


FIGURE 33. ISL70419SEH SEE TEST BOARD BOTTOM VIEW

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
 6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338