

DA9231

Configurable PMIC with a 300 mA high efficiency buck Converter and 100 mA LDO/Load Switch

DA9231 is an ultra-low quiescent current high efficiency buck regulator and an ultra-low quiescent current LDO in a compact I²C configurable WLCSP package targeting battery powered applications needing highly efficient power supplies.


The buck regulator extends high light-load efficiency down to 10 μ A further extending battery life. Dynamic Voltage Control (DVC) in the buck regulator facilitates optimization across the system power modes enabling further improvement in System efficiency and battery life.

The low quiescent current LDO can be configured as a Load Switch and provides the second supply output. The LDO's uncommitted inputs can be connected to either the battery or the buck output. Connecting the input to the buck output provides the flexibility to improve the PSRR at the LDO output as needed.

DA9231 also helps future proof for new battery technologies (such as silicon anode) with a minimum supply voltage of 2.5 V and help support 10 nm/14 nm SoC and GPS with the buck regulator minimum output voltage of 0.6 V.

DA9231 provides multiple protection features and comes with the ability to monitor the events and indicators in the GPO pin.

Suitable for space constrained applications, the DA9231 comes in a 1.65 mm x 1.25 mm, 12-pin WLCSP package

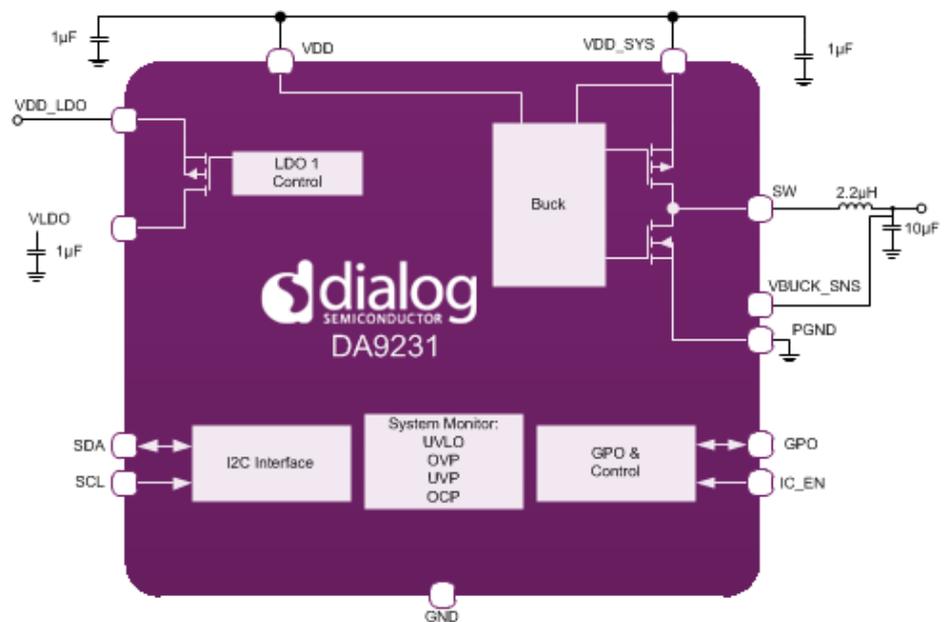

Key Features

- ▶ 300 mA buck converter
 - 750 nA total input current (buck enabled no load, LDO disabled)
 - Up to 81% efficiency at 1.8 V output, 10 μ A load current
 - Input voltage 2.5 V to 5.5 V
 - Output voltage 0.6 V to 1.9 V
 - Dynamic Voltage Control (DVC)
- ▶ 100 mA LDO/Load Switch
 - 1.35 μ A quiescent current (buck and LDO enabled, no load)
 - Input voltage 1.8 V to 5.5 V
 - Output voltage 0.7 V to 3.3 V
- ▶ I²C interface for device configuration and control
- ▶ Protection features and System monitors
- ▶ Small 1.65 mm x 1.25 mm, 12-pin WLCSP package

Applications

- ▶ Wearables – wristwear, hearables
- ▶ Smart devices - thermostats and doorlocks
- ▶ Smoke detectors
- ▶ Portable medical devices
- ▶ Remote sensors
- ▶ High efficiency, low power applications

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu

Koto-ku, Tokyo 135-0061, Japan

www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:

<https://www.renesas.com/contact/>

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.