

Linux Interface Specification Device Driver A/D Converter

User's Manual: Software

RZ/G2L Group, RZ/V2L Group, RZ/V2N Group,
RZ/G3E Group and RZ/Five

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corp. without notice. Please review the latest information published by Renesas Electronics Corp. through various means, including the Renesas Electronics Corp. website (<http://www.renesas.com>).

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev. 1.11 Jul 22, 2025)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan

www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

How to Use This Manual

1. Purpose and Target Readers

This manual is designed to provide the user with an understanding of the hardware functions and electrical characteristics of the MPU. It is intended for users designing application systems incorporating the MPU.. It is intended for users developing software incorporating the processors. A basic knowledge of software development and Linux systems is necessary in order to use this document.

Particular attention should be paid to the precautionary notes when using the manual. These notes occur within the body of the text, at the end of each section, and in the Usage Notes section.

The revision history summarizes the locations of revisions and additions. It does not list all revisions. Refer to the text of the manual for details.

The following documents apply to the RZ/G2L Group, RZ/V2L Group, RZ/Five Group and RZ/G3E Group. Make sure to refer to the latest versions of these documents. The newest versions of the documents listed may be obtained from the Renesas Electronics Web site.

Document Type	Description	Document Title	Document No.
User's manual for Hardware	Hardware specifications (pin assignments, memory maps, peripheral function specifications, electrical characteristics, timing charts) and operation description Note: Refer to the application notes for details on using peripheral functions.	RZ/G2L Group User's Manual: Hardware	---
		RZ/V2L Group User's Manual: Hardware	---
		RZ/Five Group User's Manual: Hardware	---
		RZ/G3E Group User's Manual: Hardware	---
User's manual for Software	Description of Thermal Linux interface Specification	Linux interface Specification - ADC	This User's manual
Application Note	Information on using peripheral functions and application examples Sample programs Information on writing programs in assembly language and C	Available from Renesas Electronics Web site.	
Renesas Technical Update	Product specifications, updates on documents, etc.		

2. Notation of Numbers and Symbols

3. Register Notation

4. List of Abbreviations and Acronyms

Terms	Explanation
ADC	<u>A</u> nalog-to- <u>D</u> igital <u>C</u> onverter
INT[]	Function that returns the integer portion of the value enclosed in []
V _{in}	Analog input voltage
ADC_AVREF	Voltage of power supply pin(ADC_AVDD18) for the analog unit
ADCR	Value of A/D conversion result registers (ADCR7 to ADCR0)

Table of Contents

1. Overview.....	1
1.1 Overview	1
1.2 Function	1
1.3 Reference	2
1.3.1 Standard.....	2
1.3.2 Related documents	2
1.4 Restrictions	2
2. Terminology.....	3
3. Operating Environment.....	4
3.1 Hardware Environment	4
3.2 Module Configuration.....	5
3.3 Operation	7
3.3.1 Type of A/D conversion Modes	7
3.3.2 Interrupt Functions	8
4. External Interface.....	10
4.1 Device Node	10
5. Integration.....	11
5.1 Directory Configuration	11
5.2 Integration Procedure	11
5.3 Device Tree Setting	12
5.3.1 ADC node.....	12
5.4 Option Setting	15
5.4.1 Module Parameters	15
5.4.2 Kernel Parameters	15

1. Overview

1.1 Overview

This manual explains the driver module (this module) that controls the ADC Controller on RZ/G2L group (except RZ/G2LC), RZ/V2L group, RZ/V2N, RZ/G3E and RZ/Five.

Note: Currently, this device is supported in two kernel versions v5.10 and v6.1 with the information below:

- v5.10: RZ/G2L Group, RZ/V2L group and RZ/Five.
- v6.1: RZ/G2L, RZ/G3E and RZ/V2N.

1.2 Function

The following functionality is supported:

- Trigger mode:
 - Software trigger.
- Resolution: 12 bits (RZ/G2L, RZ/V2L, RZ/Five, RZ/G3E), 8 bits/12 bits (RZ/V2N)
- Number of channels:
 - RZ/G2L and RZ/V2L: 8 channels
 - RZ/G2UL and RZ/Five: 2 channels
 - RZ/G2LC: not supported.
 - RZ/V2N: 3 units, 8 channels per unit
 - RZ/G3E: 8 channels.
- Operation mode:
 - Select mode: 1-buffer mode (RZ/G2L, RZ/V2L, RZ/Five, RZ/G3E)
 - Single Scan Mode (RZ/V2N)

1.3 Reference

1.3.1 Standard

There is no reference document on standards.

1.3.2 Related documents

There is no document related to this kernel.

1.4 Restrictions

None.

2. Terminology

The following table shows the terminology related to this kernel.

Table 2-1 Terminology

Terms	Explanation
ADC	<u>A</u> nalog-to- <u>D</u> igital <u>C</u> onverter
INT[]	Function that returns the integer portion of the value enclosed in []
Vin	Analog input voltage
ADC_AVREF	Voltage of power supply pin(ADC_AVDD18) for the analog unit
ADCR	Value of A/D conversion result registers (ADCR7 to ADCR0)

3. Operating Environment

3.1 Hardware Environment

The following table shows the hardware needed to use this kernel.

Table 3-1 Hardware environment (RZ/G2L, RZ/V2L and RZ/Five)

Name	Version	Manufacturer
RZ/G2L Evaluation Board Kit	SMARC module: v01 Carrier board: v03	Renesas Electronics Europe GmbH
RZ/G2UL Evaluation Board Kit	SMARC module: v01 Carrier board: v03	Renesas Electronics Europe GmbH
RZ/V2L Evaluation Board Kit	SMARC module: v01 Carrier board: v03	Renesas Electronics Europe GmbH
RZ/Five Evaluation Board Kit	SMARC module: v01 Carrier board: v03	Renesas Electronics Europe GmbH

Table 3-2 Hardware environment (RZ/V2N, RZ/G3E)

Name	Product number
RZ/V2N Evaluation Kit	RTK0EF0186C03000BJ
RZ/G3E SMARC Evaluation Board Kit	RTK9947E57S01000BE

3.2 Module Configuration

The following figures show the configuration of this module.

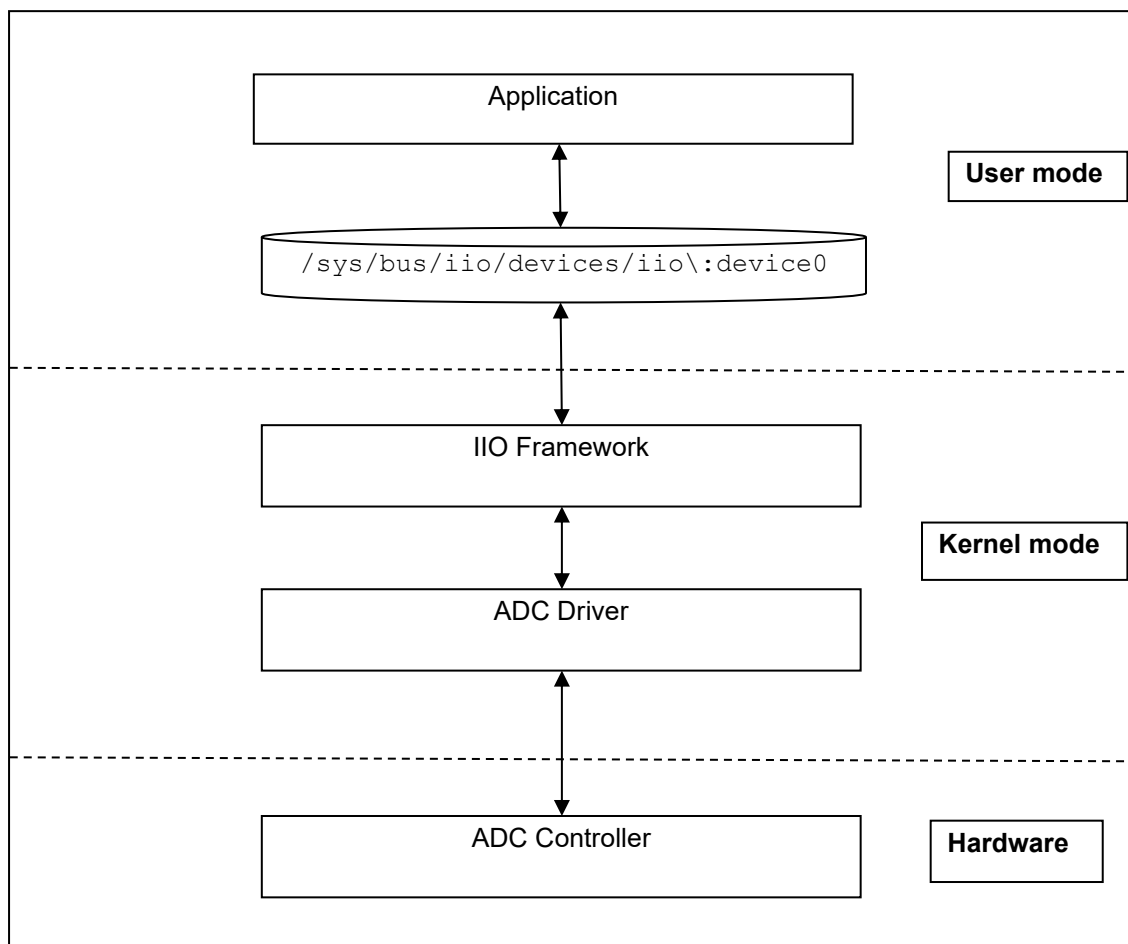


Figure 3-1 Module Configuration (RZ/G2L, RZ/V2L, RZ/Five, RZ/G3E)

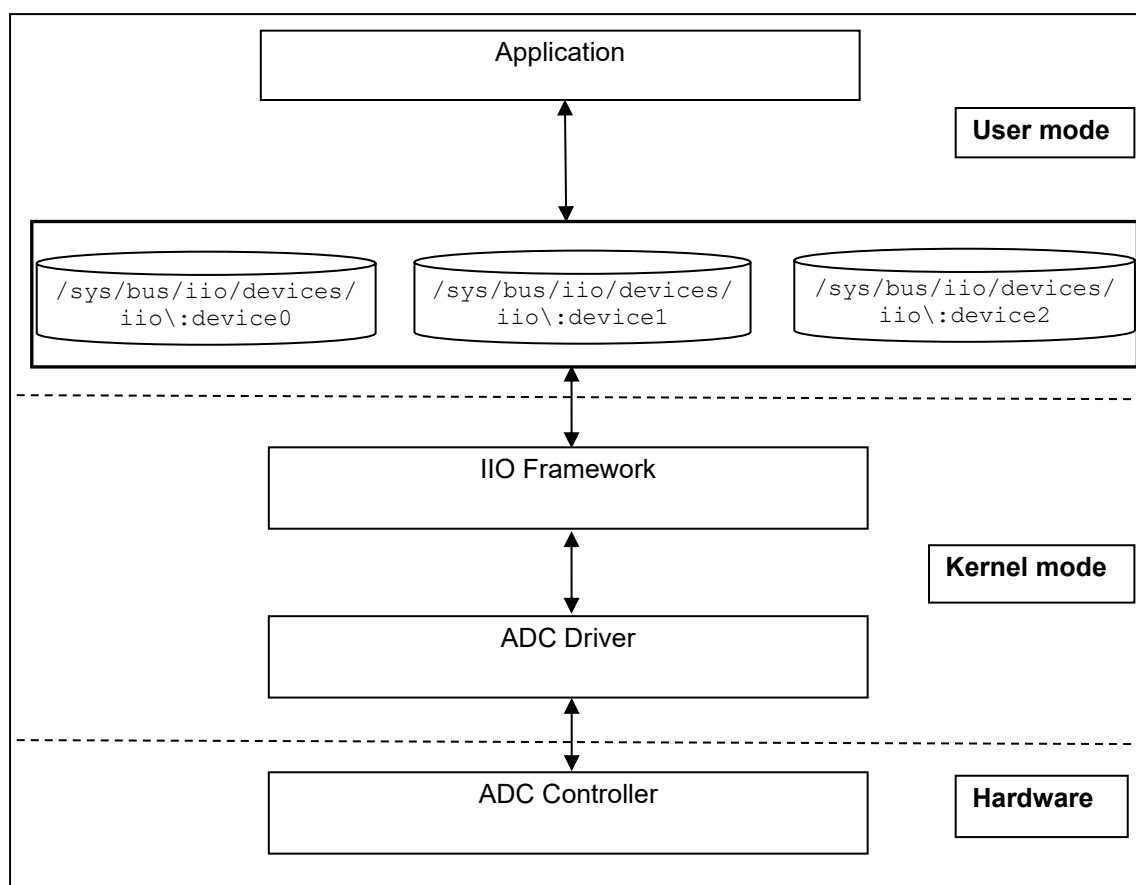


Figure 3-2 Module Configuration (RZ/V2N)

3.3 Operation

3.3.1 Type of A/D conversion Modes

Table 3-3 A/D Conversion Modes (RZ/G2L Group, RZ/V2L, RZ/G3E and RZ/Five)

Trigger Mode		Trigger Input Mode	Operating Mode	Conversion Count	Buffer Count	Operation
Software trigger		-	Select	Single	1 buffer	Selected 1 channel x 1-time conversion

Table 3-4 A/D Conversion Modes (RZ/V2N Group)

Trigger Mode	Operating Mode	Operation
Software trigger Internal trigger External trigger	Single scan mode	A/D conversion is performed only once on the analog inputs of arbitrarily selected channels.
	Continuous scan mode	A/D conversion is performed repeatedly on the analog inputs of arbitrarily selected channels.
	Group scan mode	Two (groups A and B) or three (groups A, B, and C) can be selected as the number of the groups to be used. Only the combination of groups A and B can be selected when the number of the groups is two.

Note 1. Currently, only the Single scan mode is supported in RZ/V2N's ADC device driver

3.3.2 Interrupt Functions

Table 3-5 and Table 3-6 list the interrupt sources that are used by this module on different RZ platforms.

On RZ/G2L, RZ/V2L, and RZ/Five platforms, the INTS bit in the ADINT register is used to set the operation for outputting an interrupt request of the INTAD.

Table 3-5 List of Interrupt Sources (RZ/G2L Group, RZ/V2L and, RZ/Five)

Interrupt Source	Condition for Generation	Enabling Interrupt	Confirming Interrupt Source	Method for Clearing Interrupt Source
		ADINT Register	ADSTS Register*1	ADSTS Register
A/D conversion end	When A/D conversion on the specified channel is completed	NTEN[7:0]*2	NTST[7:0]	Write 1 to the bits that were 1 when the register was read.
A/D conversion channel select error	<ul style="list-style-type: none"> When all of the CHSEL[7:0] bits in the ADM2 register were 0 at the start of A/D conversion*3 When multiple analog input channels are selected in select mode*3 	CSEEN	CSEST	Write 1 to the CSEST bit.


Note 1. If an interrupt source is generated regardless of the settings of the INTEN[7:0] and CSEEN bits in the ADINT register, the bit corresponding to the interrupt source is set to 1 in the ADSTS register.

Note 2. The A/D conversion end interrupt can be enabled or disabled individually for each channel.

Note 3. When an A/D conversion channel select error occurs, the ADCE bit in the ADM0 register becomes 0 and A/D conversion operation is stopped.

Table 3-6 List of Interrupt Sources (RZ/G3E and RZ/V2N)

Name	Interrupt Sources	CPU request	DMAC Activation	ELC Activation	EMC request
ada_adireq_n	A/D scan end interrupt, A/D scan end interrupt for Group A	Possible	Possible	Possible	Not possible
ada_gbadireq_n	A/D scan end interrupt for Group B	Possible	Possible	Possible	Not possible
ada_gcadireq_n	A/D scan end interrupt for Group C	Possible	Possible	Possible	Not possible
ada_compai_n	Window A compare match	Possible	Not possible	Not possible	Not possible
ada_compbi_n	Window B compare match	Possible	Not possible	Not possible	Not possible
ada_adelcreq	A/D scan end interrupt for ELC	Not possible	Not possible	Possible	Not possible
ada_elcondmtch	Compare match	Not possible	Possible	Possible	Not possible
ada_elcondunmtch	Compare mismatch	Not possible	Possible	Possible	Not possible
ada_adereq_n	A/D error interrupt request by overwrite check	Not possible	Not possible	Not possible	Possible

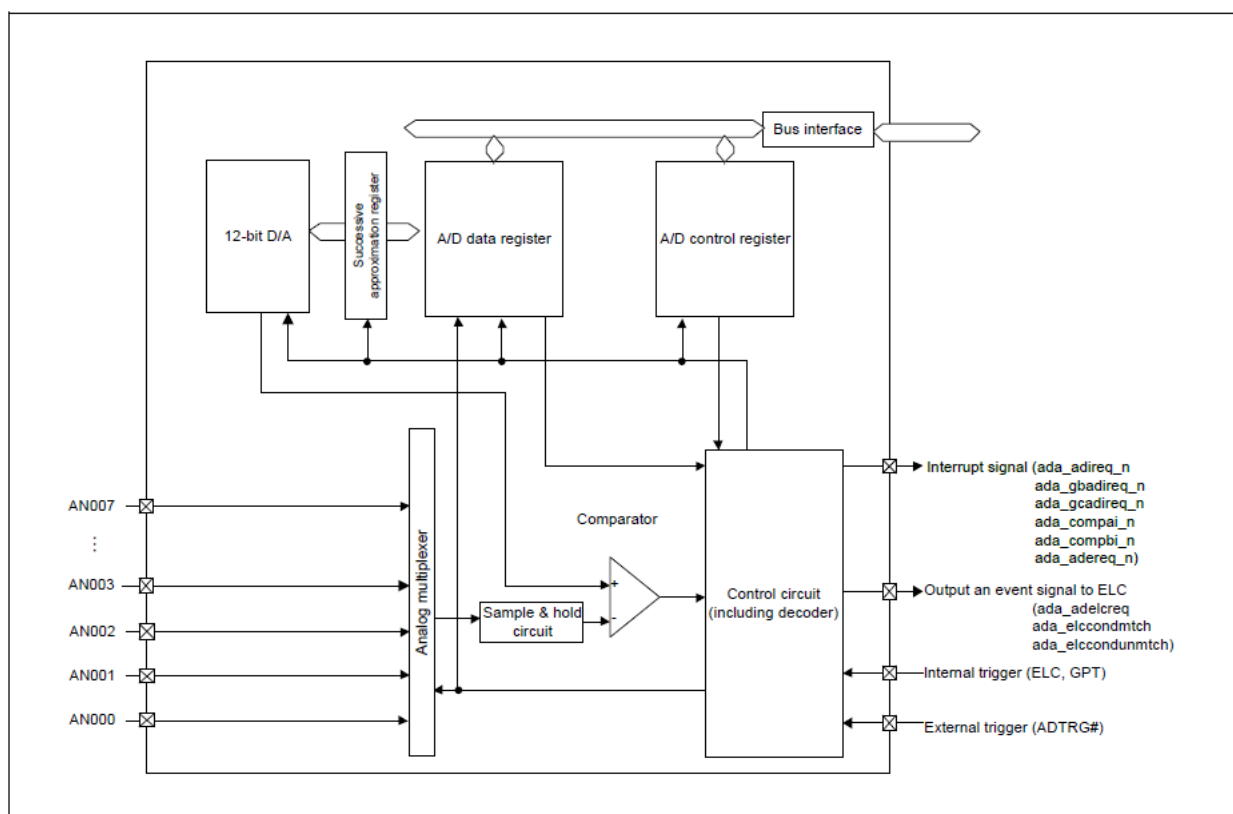Figure 3-3 Block Diagram of 12-Bit A/D Converter Module Configuration (Unit0 to Unit2 for RZ/V2N, Unit0 only for RZ/G3E)

4. External Interface

The supported external interface of this module is explained.

4.1 Device Node

ADC channel	Device Node
ADC_CH0	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage0_raw
ADC_CH1	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage1_raw
ADC_CH2	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage2_raw
ADC_CH3	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage3_raw
ADC_CH4	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage4_raw
ADC_CH5	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage5_raw
ADC_CH6	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage6_raw
ADC_CH7	/sys/bus/iio/devices/ iio\: <i>device0</i> /in_voltage7_raw

Note) RZ/G2L, RZ/V2L support 8 channels: ADC_CH0 to ADC_CH7

RZ/G2UL and RZ/Five support 2 channels: ADC_CH0 and ADC_CH1.

RZ/G2LC does NOT support ADC

RZ/V2N also supports **iio\:***device1*, and **iio\:***device2* which represent the ADC unit 1 and ADC unit 2 respectively

RZ/G3E support 8 channels: ADC_CH0 to ADC_CH7.

5. Integration

5.1 Directory Configuration

The directory configuration is shown below.




Figure 5-1 Directory configuration (RZ/G2L, RZ/V2L, and RZ/Five)




Figure 5-2 Directory configuration (RZ/G3E and RZ/V2N)

5.2 Integration Procedure

To enable the functions of this module, make the following setting in Kernel Configuration.



Figure 5-3 Kernel configuration (RZ/G2L Group, RZ/V2L, and RZ/Five)



Figure 5-4 Kernel configuration (RZ/G3E and RZ/V2N)

5.3 Device Tree Setting

5.3.1 ADC node

Basic configuration information of ADC is defined in devicetree SoC DTSI file (i.e. r9a07g044.dtsi for RZ/G2L, r9a09g046.dtsi for RZ/V2N, r9a09g047.dtsi for RZ/G3E). It is located in **arch/arm64/boot/dts/renesas** directory. Examples of devicetree configuration for an ADC channel are described below:

```
adc: adc@10059000 {
    compatible = "renesas,r9a07g044-adc", "renesas,rzg2l-adc";
    reg = <0 0x10059000 0 0x400>;
    interrupts = <GIC_SPI 347 IRQ_TYPE_EDGE_RISING>;
    clocks = <&cpg CPG_MOD R9A07G044_ADC_ADCLK>,
            <&cpg CPG_MOD R9A07G044_ADC_PCLK>;
    clock-names = "adclk", "pclk";
    resets = <&cpg R9A07G044_ADC_PRESETN>,
            <&cpg R9A07G044_ADC_ADRST_N>;
    reset-names = "presetn", "adrst-n";
    power-domains = <&cpg>;
    status = "disabled";
    #address-cells = <1>;
    #size-cells = <0>;
    channel@0 {
        reg = <0>;
    };
    channel@1 {
        reg = <1>;
    };
    channel@2 {
        reg = <2>;
    };
    channel@3 {
        reg = <3>;
    };
    channel@4 {
        reg = <4>;
    };
    channel@5 {
        reg = <5>;
    };
    channel@6 {
        reg = <6>;
    };
    channel@7 {
        reg = <7>;
    };
};
```

Figure 5-5 Devicetree initial references information of ADC (RZ/G2L and RZ/V2L)

- Note) - All of the information in the above device tree is used for both RZ/G2L and RZ/V2L except :
- compatible: "renesas,adc-r9a07g044" is used for RZ/G2L, "renesas,adc-r9a07g054" is used for RZ/V2L, compatible: "renesas,adc-r9a07g043" is used for RZ/G2UL and RZ/Five.
 - clocks: R9A07G044_CLK_ADC is used for RZ/G2L, R9A07G054_CLK_ADC is used for RZ/V2L, and R9A07G043_CLK_ADC is used for RZ/G2UL and RZ/Five.
 - resets: R9A07G044_ADC_PRESETN, R9A07G044_ADC_ADRST_N are used for RZ/G2L, R9A07G054_ADC_PRESETN, R9A07G054_ADC_ADRST_N are used for RZ/V2L, and R9A07G043_ADC_PRESETN, R9A07G043_ADC_ADRST_N are used for RZ/G2UL and RZ/Five.

```
adc0: adc@11c00000 {
    compatible = "renesas,r9a09g056-adc", "renesas,rzv2n-adc";
    reg = <0 0x11c00000 0 0x400>;
    clocks = <&cpg CPG_MOD 0x108>,
            <&cpg CPG_MOD 0x107>;
    clock-names = "adclk", "pclk";
    resets = <&cpg 0xf6>;
    reset-names = "adrst-n";
    power-domains = <&cpg>;
    status = "disabled";
    #address-cells = <1>;
    #size-cells = <0>;
    channel@0 {
        reg = <0>;
    };
    channel@1 {
        reg = <1>;
    };
    channel@2 {
        reg = <2>;
    };
    channel@3 {
        reg = <3>;
    };
    channel@4 {
        reg = <4>;
    };
    channel@5 {
        reg = <5>;
    };
    channel@6 {
        reg = <6>;
    };
    channel@7 {
        reg = <7>;
    };
};
```

Figure 5-6 Devicetree initial references information of ADC (RZ/V2N)

Note) - All of the information in the above devicetree example is used for RZ/V2N

```

adc: adc@11c00000 {
    compatible = "renesas,r9a09g047-adc", "renesas,rzv2h-adc";
    reg = <0 0x11C00000 0 0x400>;
    clocks = <&cpg CPG_MOD 263>,
            <&cpg CPG_MOD 264>;
    clock-names = "pclk", "adclk";
    resets = <&cpg 246>;
    reset-names = "adrst-n";
    power-domains = <&cpg>;
    renesas,sysc-signal = <&sys 0x1600 0x1>;
    status = "disabled";

    #address-cells = <1>;
    #size-cells = <0>;

    channel@0 {
        reg = <0>;
    };
    channel@1 {
        reg = <1>;
    };
    channel@2 {
        reg = <2>;
    };
    channel@3 {
        reg = <3>;
    };
    channel@4 {
        reg = <4>;
    };
    channel@5 {
        reg = <5>;
    };
    channel@6 {
        reg = <6>;
    };
    channel@7 {
        reg = <7>;
    };
};

```

Figure 5-7 Devicetree initial references information of ADC (RZ/G3E)

Note)- All of the information in the above devicetree example is used for RZ/G3E.

5.4 Option Setting

5.4.1 Module Parameters

There are no module parameters.

5.4.2 Kernel Parameters

There are no kernel parameters.

Revision History	Linux Interface Specification Device Driver A/D Converter User's Manual: Software
------------------	--

Rev.	Date	Description	
		Page	Summary
0.50	Apr. 30, 2021	—	First Edition issued
1.0	Jul. 15, 2021	—	No modification, keep version to keep consistent with other documents
1.1	Sep. 15, 2021	—	Merge RZ/G2L driver manual with RZ/V2L
1.2	Feb. 15, 2022	—	Add RZ/G2UL, RZ/G2LC device
1.3	Mar. 31, 2022	12	Update information for device-tree
1.4	May. 31, 2022	—	No modification, keep version to keep consistent with other documents
1.5	June. 24, 2022	—	Add RZ/Five Device
1.6	Sep. 15, 2022	—	Update information
1.7	Dec. 15, 2022	—	No modification, change version to keep consistent with other documents
1.8	Mar. 15, 2023	—	No modification, change version to keep consistent with other documents
1.9	May. 30, 2025	1	- Add MPU information support for both kernel versions v5.10 and v6.1. - Correct current supported functionality of ADC.
		6	- Correct Table 3-2 A/D Conversion Modes
		7	- Correct Table 3-3 List of Interrupt Functions.
		8	- Correct the number of channels supported in Note.
		9	- Correct Figure 5.2 Kernel configuration description.
		10	- Correct devicetree information description.
1.10	Jun. 30, 2025	—	Add RZ/V2N support information
1.11	Jul. 22, 2025	—	Add RZ/G3E support information

Linux Interface Specification Device Driver ADC
User's Manual: Software

Publication Date: Rev. 1.11 Jul 22, 2025

Published by: Renesas Electronics Corporation

RZ/G2L Group, RZ/V2L Group, RZ/V2N Group,
RZ/G3E Group and RZ/Five



Renesas Electronics Corporation