

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

1 Description

The iW330 is a PWM signal generator that works with three different types of dimming inputs, 0-5V and 0-10V PWM dimming, 0-5V and 0-10V linear dimming or simple dimming using a single resistor to ground from the DIM pin. The iW330 converts either of these three signals into a 5%-100% PWM duty cycle that can then be used to provide a dimming signal to a primary-side LED driver such as the iW3636, removing the need for transformers or other driver circuitry. The iW330 offers an optional turn-off function where the output will turn-off completely at a minimum dimming voltage.

The output PWM frequency can be programmed from 100Hz to 5kHz through a single capacitor to ground. The input to the iW330 integrates the necessary current source to interface with both active and passive 0-10V dimmers without additional circuitry, while the output can drive an optocoupler to provide isolated dimming control from the secondary to the primary.

2 Features

- 15V to 60V operating voltage
- 3-in-1 dimmer interface
 - » 0-10V or 0-5V linear dimming
 - » 0-10V or 0-5V PWM dimming
 - » Single resistor dimming
- SOIC-8 package
- Low power shutdown mode
- Optional turn-off threshold (-30/-32 options)
- 5% to 100% PWM output
 - » 1% PWM duty cycle tolerance
 - » Selectable frequency range via external capacitor
- Integrated current source for driving 0-10V or 0-5V dimmers
- Integrated optocoupler driver for isolated applications

3 Applications

- 0-10V LED dimming application
- 3-in-1 LED driver interface chip (0-5V/0-10V linear, 0-5V/0-10V PWM and R dimming) dimming LED driver application

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

4 Pinout Description




Figure 4.1 : 8-Lead SOIC Package

Pin Number	Pin Name	Type	Pin Description
1	VIN	Power Supply	Power supply up to 60V.
2	GND	Ground	Ground connection.
3	VCC	Power Supply	Internal 5V LDO output, connect a 1 μ F capacitor to GND.
4	DRV	Output	Drive external optocoupler to pass down dimming PWM duty information.
5	DIM	Analog Input	iW330-x0: 0-10V/PWM/RDIM 3-in-1 dimming information input, there is a constant current source of 100 μ A internal for driving 0-10V dimmer and RDIM resistor. iW330-x2: 0-5V/PWM/RDIM 3-in-1 dimming information input, there is a constant current source of 100 μ A internal for driving 0-10V dimmer and RDIM resistor.
6	FLT	Analog Input	Dimming voltage integral compensation input pin. When UVLO and OVP, the pin is pulled down to GND.
7	CF	Analog Input	Set the PWM output frequency: 100Hz – 5kHz.
8	SD	Analog Input	External V_{IN} voltage sensing pin to set V_{IN} OVP threshold voltage.

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

5 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded.

Parameter	Symbol	Value	Units
VIN to GND	V_{VIN}	-0.3 to 65	V
DIM to GND		-0.3 to 65	V
DRV, FLT, CF, SD to GND		-0.3 to 5.5	V
ESD rating per JEDEC JS-001-2017		±2,000	V
Storage temperature range		-65 to +150	°C
Maximum junction temperature		150	°C

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

6 Physical Dimensions

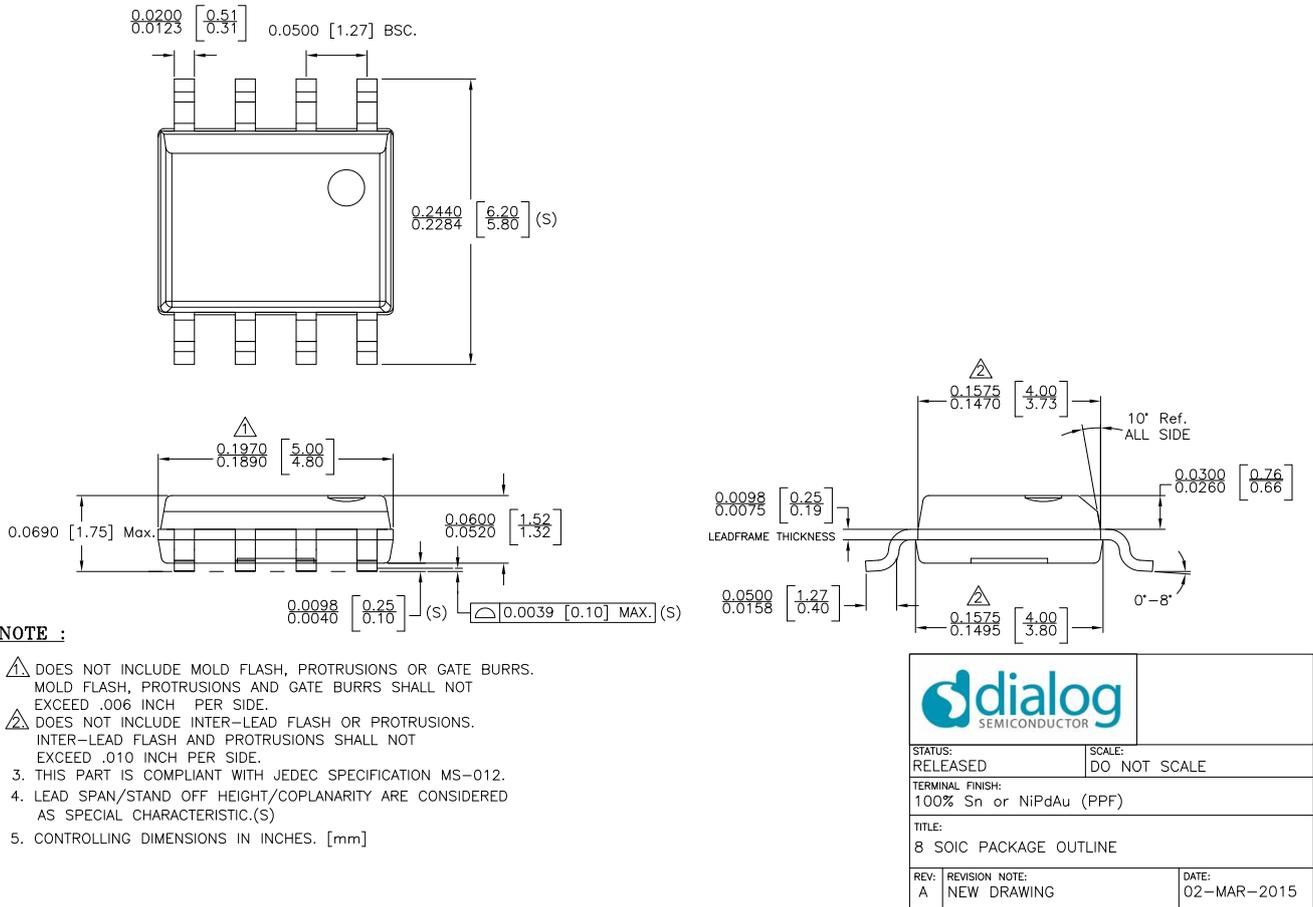


Figure 6.1 : Physical Dimensions of 8-Pin SOIC Package

7 Ordering Information

Part Number	Options	Package	Description
iW330-00	0-10V PWM Driver; Turn-off Function Disabled	SOIC-8	Tape & Reel ¹
iW330-02	0-5V PWM Driver; Turn-off Function Disabled	SOIC-8	Tape & Reel ¹
iW330-30	0-10V PWM Driver; Turn-off Function Enabled	SOIC-8	Tape & Reel ¹
iW330-32	0-5V PWM Driver; Turn-off Function Enabled	SOIC-8	Tape & Reel ¹

Note 1. Tape and reel packing quantity is 2,500/reel. Minimum packing quantity is 2,500.

SSL Interface Controller for Analog (0-10V/0-5V), PWM, and Resistor Dimming with Optocoupler Delay Elimination

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

© 2022 Renesas Electronics Corporation. All rights reserved.

RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.