

# Smart Configurator for RH850 Plug-in in e<sup>2</sup> studio 2025-12

## Smart Configurator for RH850 V1.15.0

### Release Note

---

#### Introduction

Thank you for using the Smart Configurator for RH850.

This document describes the restrictions and points for caution. Read this document before using the product.

#### Contents

1. Introduction.....	3
1.1 System Requirements.....	3
1.1.1 Window PC.....	3
1.1.2 Linux PC .....	3
1.1.3 Development Environments.....	3
2. Support List.....	4
2.1 Support Devices List .....	4
2.2 Support Components List.....	6
2.3 New Support.....	10
2.3.1 Support new RH850/U2B-E devices .....	10
3. Changes.....	11
3.1 Correction of Issues/Limitations .....	11
3.1.1 Fixed the issue of MSPI Master maximum transmission speed out of the range .....	11
3.1.2 Fixed the issue X2 pin is always used.....	12
3.1.3 Fixed the issue MCU package diagram displayed wrong .....	13
3.1.4 Fixed the issue driver code generated for TAUD Input setting is not correct .....	14
3.2 Specification Changes .....	15
3.2.1 The backup feature is disabled by default .....	15
4. List of RENESAS TOOL NEWS AND TECHNICAL UPDATE .....	16
5. Points for Limitation.....	18
5.1 List of Limitation .....	18
5.2 Details of Limitation .....	18
5.2.1 Note on using RIIC .....	18
5.2.2 Note on using OS Timer .....	19
5.2.3 Note on using All Toolchain (CC-RH, GHS, IAR) .....	19
5.2.4 Note on UI display with High Contrast theme on Linux OS.....	20
5.2.5 Note on using Ports.....	20

---

6. Points for Caution .....	21
6.1 List of Caution .....	21
6.2 Details of Caution .....	22
6.2.1 About the I/O define header file.....	22
6.2.2 About loading the project on CS+ .....	22
6.2.3 About the sample project.....	22
6.2.4 About the decimal point .....	22
6.2.5 Note on pins sharing functions .....	22
6.2.6 Note on Interrupt Controller resource name .....	23
6.2.7 Note on DMA/DTS trigger generator setting of MSPI Master .....	23
6.2.8 Note on CPU Operating mode of DTS Controller .....	24
6.2.9 Note on using Smart Configurator when the OS language is Japanese.....	24
6.2.10 Note on changing device when using Error Control Module.....	24
6.2.11 Note on reloading project for Error Control Module .....	25
6.2.12 Note on the “Release Notes”, “Tool News” display issue in Renesas Website .....	26
6.2.13 Note on using Smart Configurator for RH850 in CS+ .....	27
6.2.14 Note on using RH850/U2A devices .....	27
Revision History .....	28

## 1. Introduction

Smart Configurator is a utility for combining software to meet your needs. It supports the following three functions related to the embedding of Renesas drivers in your systems: importing middleware, generating driver code, and setting pins.

### 1.1 System Requirements

The operating environment is as follows.

#### 1.1.1 Window PC

- System: x64/x86 based processor  
Windows® 11
- Memory capacity: We recommend 4 GB or more
- Capacity of hard disk: At least 500 MB of free space.
- Display: Graphics resolution should be at least 1024 x 768, and the mode should display at least 65,536 colors.
- Processor: 1 GHz or higher (must support hyper-threading, multi-core CPUs)

#### 1.1.2 Linux PC

Smart Configurator for RH850 plug-in in e<sup>2</sup> studio 2024-04 or later is supported on Linux OS.

- System: x64 based processor, 2 GHz or faster (with multicore CPUs)  
Ubuntu 24.04 LTS Desktop (64-bit version)  
Ubuntu 22.04 LTS Desktop (64-bit version)
- Memory capacity: We recommend 2 GB or more.
- Capacity of hard disk: At least 2 GB of free space.

#### 1.1.3 Development Environments

- Renesas electronics Compiler for RH850 [CC-RH] V2.07.00 or later
- GHS Multi V8.1.6 or later
- IAR Embedded Workbench for RH850 V3.10.1 <sup>Note</sup> or later
- CS+ for CC V8.15.00 or later (Windows PC)

• **Note:**

1. IAR Embedded Workbench for RH850 V3.10.1 doesn't support RH850/U2B, RH850/U2C and RH850/U2B-E yet, so Smart Configurator doesn't support creating RH850/U2B, RH850/U2C and RH850/U2B-E IAR project and generate code.

## 2. Support List

### 2.1 Support Devices List

Below is a list of devices supported by the Smart Configurator for RH850 V1.15.0.

**Table 2-1 Support Devices**

Group (HW Manual number)	PIN	Device name (Device file version)
RH850/F1KM-S1 Group (R01UH0684EJ0130)	48pin	R7F701693, R7F701694, R7F701695 (V1.40)
	64pin	R7F701690, R7F701691, R7F701692 (V1.40)
	80pin	R7F701687, R7F701688, R7F701689 (V1.40)
	100pin	R7F701684, R7F701685, R7F701686 (V1.40)
RH850/F1KM-S2 Group (R01UH0684EJ0130)	100pin	R7F701760 (V1.40)
	144pin	R7F701762 (V1.40)
	176pin	R7F701764 (V1.40)
RH850/F1KM-S4 Group (R01UH0684EJ0130)	100pin	R7F701760, R7F701644, R7F701645 (V1.40)
	144pin	R7F701762, R7F701646, R7F701647 (V1.40)
	176pin	R7F701764, R7F701648, R7F701649 (V1.40)
	232pin	R7F701650, R7F701651 (V1.40)
	272pin	R7F701652, R7F701653 (V1.40)
RH850/U2A16 Group (R01UH0864EJ0130)	292pin	R7F702300 (V1.50), R7F702300A (V1.40), R7F702300B (V1.30)
	373pin	R7F702300 (V1.50), R7F702300A (V1.40), R7F702300B (V1.30)
	516pin	R7F702300 (V1.50), R7F702300A (V1.40), R7F702300B (V1.30)
RH850/U2A8 Group (R01UH0864EJ0130)	292pin	R7F702301 (V1.30), R7F702301A (V1.40), R7F702301B (V1.30)
	373pin	R7F702301 (V1.30), R7F702301A (V1.40), R7F702301B (V1.30)
RH850/U2A6 Group (R01UH0864EJ0130)	144pin	R7F702302 (V1.40)
	156pin	R7F702302 (V1.40)
	176pin	R7F702302 (V1.40)
	292pin	R7F702302 (V1.40)
RH850/F1KH-D8 Group (R01UH0684EJ0111)	176pin	R7F701708, R7F701709 (V1.20)
	233pin	R7F701710, R7F701711 (V1.20)
	324pin	R7F701714, R7F701715 (V1.20)
RH850/C1M-A2 Group (R01UH0607EJ0120)	252pin	R7F701275 (V1.10)
RH850/U2B6 Group (R01UH0923EJ0050)	292pin	R7F70255x (V1.40), R7F70255xA (V1.40), R7F70255xB (V1.40)
RH850/U2B10 Group (R01UH0923EJ0050)	292pin	R7F70254x (V1.30), R7F70254xA (V1.30)
	373pin	R7F70254x (V1.30), R7F70254xA (V1.30)
	468pin	R7F70254x (V1.30), R7F70254xA (V1.30)

**Table 2-2 Support Devices**

<b>Group (HW Manual number)</b>	<b>PIN</b>	<b>Device name (Device file version)</b>
RH850/U2C8 Group (R01UH1018EJ0080)	292pin	R7F702600A (V1.00)
RH850/U2C4 Group (R01UH1018EJ0080)	292pin	R7F702606A, R7F702613A, R7F702616A (V1.00)
	144pin	R7F702606A, R7F702614A, R7F702616A (V1.00)
	100pin	R7F702606A, R7F702613A, R7F702616A (V1.00)
RH850/U2C2 Group (R01UH1018EJ0080)	144pin	R7F702615, R7F702615A (V1.4)
	100pin	R7F702608A (V1.4)
RH850/U2B24-E Group (R01UH1046EJ0050)	516pin	R7F7025Bx (E0.60a)
	292pin	R7F7025Bx (E0.60a)
RH850/U2B12-E Group (R01UH1046EJ0050)	516pin	R7F7025Cx (E0.60a)
	292pin	R7F7025Cx (E0.60a)
RH850/U2B6-E Group (R01UH1046EJ0050)	292pin	R7F7025Dx (E0.60a)

## 2.2 Support Components List

Below is a list of Components supported by the Smart Configurator for RH850 V1.15.0.

Table 2-3 Support Components

✓ : Support, - : Non-support

No	Components	Mode	RH850/ F1KM	RH850/ U2A	RH850/ F1KH	RH850/ C1M	RH850/ U2B	RH850/ U2C	RH850/ U2B-E	Remarks
1	A/D Converter	-	✓	✓	✓	✓	✓	✓	✓	
2	CSI Master	Master Transmit	✓	-	✓	✓	-	-	-	
		Master Receive	✓	-	✓	✓	-	-	-	
		Master Transmit/Receive	✓	-	✓	✓	-	-	-	
3	CSI Slave	Slave Transmit	✓	-	✓	✓	-	-	-	
		Slave Receive	✓	-	✓	✓	-	-	-	
		Slave Transmit/Receive	✓	-	✓	✓	-	-	-	
4	Data CRC	-	✓	✓	✓	✓	-	✓	-	
5	DMA Controller	-	✓	✓	✓	✓	✓	✓	✓	
6	DTS Controller	-	-	✓	-	✓	-	✓	-	
7	Error Control Module	-	-	✓	-	✓	-	✓	-	
8	ATOM Signal Output Mode Compare	-	-	✓	-	-	-	-	-	
9	ATOM Signal Output Mode Immediate	-	-	✓	-	-	-	-	-	
10	ATOM Signal Output Mode PWM	-	-	✓	-	-	-	-	-	
11	ATOM Signal Output Mode Serial	-	-	✓	-	-	-	-	-	
12	Dead Time Module	-	-	✓	-	-	-	-	-	
13	GTM Clock	-	-	✓	-	-	-	-	-	
14	TIM Bit Compression Mode	-	-	✓	-	-	-	-	-	

Table 2-4 Support Components

✓: Support, -: Non-support

No	Components	Mode	RH850/ F1KM	RH850/ U2A	RH850/ F1KH	RH850/ C1M	RH850/ U2B	RH850/ U2C	RH850/ U2B-E	Remarks
15	TIM Gated Periodic Sampling Mode	-	-	✓	-	-	-	-	-	
16	TIM Input Event Mode	-	-	✓	-	-	-	-	-	
17	TIM Input Prescaler Mode	-	-	✓	-	-	-	-	-	
18	TIM Pulse Integration Mode	-	-	✓	-	-	-	-	-	
19	TIM PWM Measurement Mode	-	-	✓	-	-	-	-	-	
20	TIM Serial Shift Mode	-	-	✓	-	-	-	-	-	
21	Time Base Unit	-	-	✓	-	-	-	-	-	
22	Interrupt Controller	-	✓	✓	✓	✓	✓	✓	✓	Only table reference method
23	Key Return	-	✓	-	✓	-	-	-	-	
24	MSPI Master	Transmit	-	✓	-	-	✓	✓	✓	No support LVDS mode
		Receive	-	✓	-	-	✓	✓	✓	
		Transmit/Receive	-	✓	-	-	✓	✓	✓	
25	MSPI Slave	Transmit	-	✓	-	-	✓	✓	✓	
		Receive	-	✓	-	-	✓	✓	✓	
		Transmit/Receive	-	✓	-	-	✓	✓	✓	
26	OS Timer	-	✓	✓	✓	✓	-	✓	-	
27	Ports	-	✓	✓	✓	✓	✓	✓	✓	
28	Real-Time Clock	-	✓	✓	✓	-	-	✓	-	
29	RIIC Master	-	✓	✓	✓	✓	✓	✓	✓	
30	RIIC Slave	-	✓	✓	✓	✓	✓	✓	✓	

Table 2-5 Support Component

✓: Support, -: Non-support

No	Components	Mode	RH850/ F1KM	RH850/ U2A	RH850/ F1KH	RH850/ C1M	RH850/ U2B	RH850/ U2C	RH850/ U2B-E	Remarks
31	SCI3 Asynchronous Mode	Transmission	-	✓	-	✓	-	-	-	
		Reception	-	✓	-	✓	-	-	-	
		Transmission / Reception	-	✓	-	✓	-	-	-	
		Multi-processor Transmission	-	✓	-	✓	-	-	-	
		Multi-processor Reception	-	✓	-	✓	-	-	-	
		Multi-processor Transmission / Reception	-	✓	-	✓	-	-	-	
32	SCI3 Clock Synchronous Mode	Transmission	-	✓	-	✓	-	-	-	
		Reception	-	✓	-	✓	-	-	-	
		Transmission / Reception	-	✓	-	✓	-	-	-	
33	Stand-by Controller	-		✓	✓	✓	-	-	-	Only Stop and DeepStop mode
34	Clock Divider	-		✓	✓	✓	✓	✓	✓	
35	Delay Count	-		✓	✓	✓	✓	✓	✓	
36	External Event Count	-		✓	✓	✓	✓	✓	✓	
37	Input Interval Timer	-		✓	✓	✓	✓	✓	✓	
38	Input Period Count Detection	-		✓	✓	✓	✓	✓	✓	
39	Input Position Detection	-		✓	✓	✓	✓	✓	✓	
40	Input Pulse Interval Judgment	-		✓	✓	✓	✓	✓	✓	
41	Input Pulse Interval Measurement	-		✓	✓	✓	✓	✓	✓	
42	Input Signal Width Judgement	-		✓	✓	✓	✓	✓	-	
43	Input Signal Width Measurement	-		✓	✓	✓	✓	-	✓	
44	Interval Timer	-		✓	✓	✓	✓	✓	✓	
45	One-Pulse Output	-		✓	✓	✓	✓	✓	✓	

Table 2-6 Support Components

✓: Support, -: Non-support

No	Components	Mode	RH850/ F1KM	RH850/ U2A	RH850/ F1KH	RH850/ C1M	RH850/ U2B	RH850/ U2C	RH850/ U2B-E	Remarks
46	One-Shot Pulse output	-	✓	✓	✓	✓	✓	✓	✓	
47	Overflow Interrupt Output (Input Period Count Detection)	-	✓	✓	✓	-	-	✓	-	
48	Overflow Interrupt Output (Width Measurement)	-	✓	✓	✓	-	✓	✓	✓	
49	PWM Output	-	✓	✓	✓	✓	✓	✓	✓	
50	Triangle PWM Output	-	✓	✓	✓	✓	-	✓	-	
51	Triangle PWM Output with Dead Time	-	-	✓	✓	✓	✓	✓	✓	
52	UART Interface	Transmission	✓	✓	✓	✓	✓	✓	✓	
		Reception	✓	✓	✓	✓	✓	✓	✓	
		Transmission / Reception	✓	✓	✓	✓	✓	✓	✓	
53	Window Watchdog Timer	-	✓	✓	✓	✓	-	✓	-	
54	ADC Boundary Flag Generator	-	-	-	-	-	✓	-	✓	

## 2.3 New Support

### 2.3.1 Support new RH850/U2B-E devices

From Smart Configurator for RH850 V1.15.0, R7F7025Bx, R7F7025Cx and R7F7025Dx devices are supported.

See Table 2-2 Support Devices for details on supported device information.

### 3. Changes

This chapter describes changes to the Smart Configurator for RH850 V1.15.0.

#### 3.1 Correction of Issues/Limitations

**Table 3-1 List of Correction of Issues/Limitations**

✓: Applicable, -: Not Applicable


No	Description	RH850 F1KM	RH850 U2A	RH850 F1KH	RH850 C1M	RH850 U2B	RH850 U2C	RH850 U2C	Remarks
1	Fixed the issue of MSPI Master maximum transmission speed out of the range	-	✓	-	-	-	-	✓	
2	Fixed the issue the X2 pin is always used	-	-	-	-	✓	-	-	
3	Fixed the issue MCU package diagram displayed wrong	-	-	-	-	-	-	✓	
4	Fixed the issue driver code generated for TAUD Input setting is not correct	-	-	-	-	-	✓	-	

##### 3.1.1 Fixed the issue of MSPI Master maximum transmission speed out of the range

When using the components MSPI Master, and double click Textbox Baudrate, the maximum transmission speed displayed in console is out of the value defined in user manual:

For RH850/U2A MSPI6 ~ MSPI9, the maximum baudrate is corrected to 10MHz from 20MHz.

For RH850/U2C, all MSPI units, the maximum baudrate is corrected to 20MHz from 40MHz.

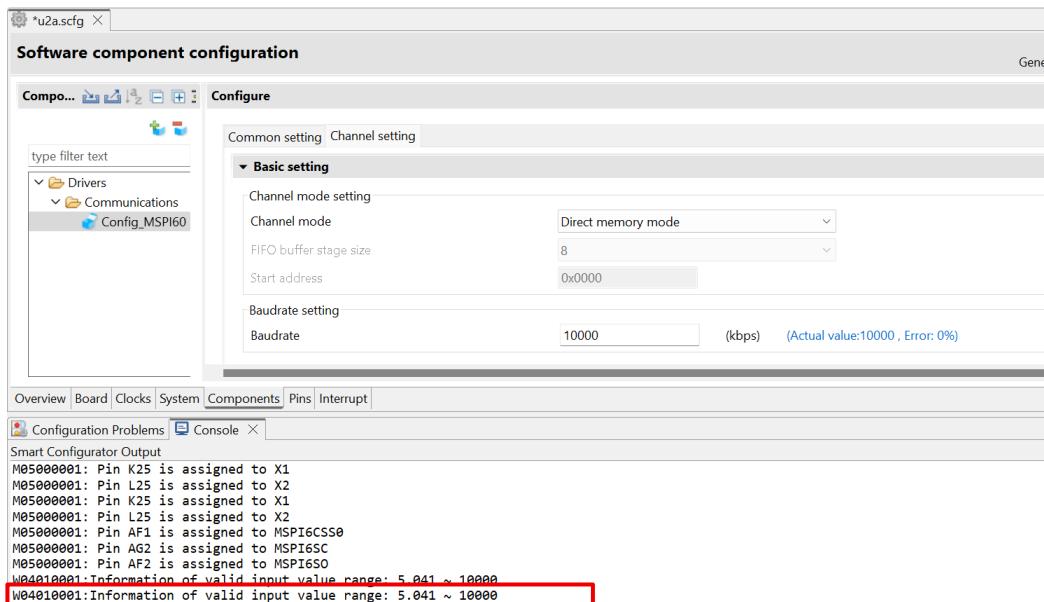

**Figure 3-1 RH850/U2A MSPI Master baudrate range**

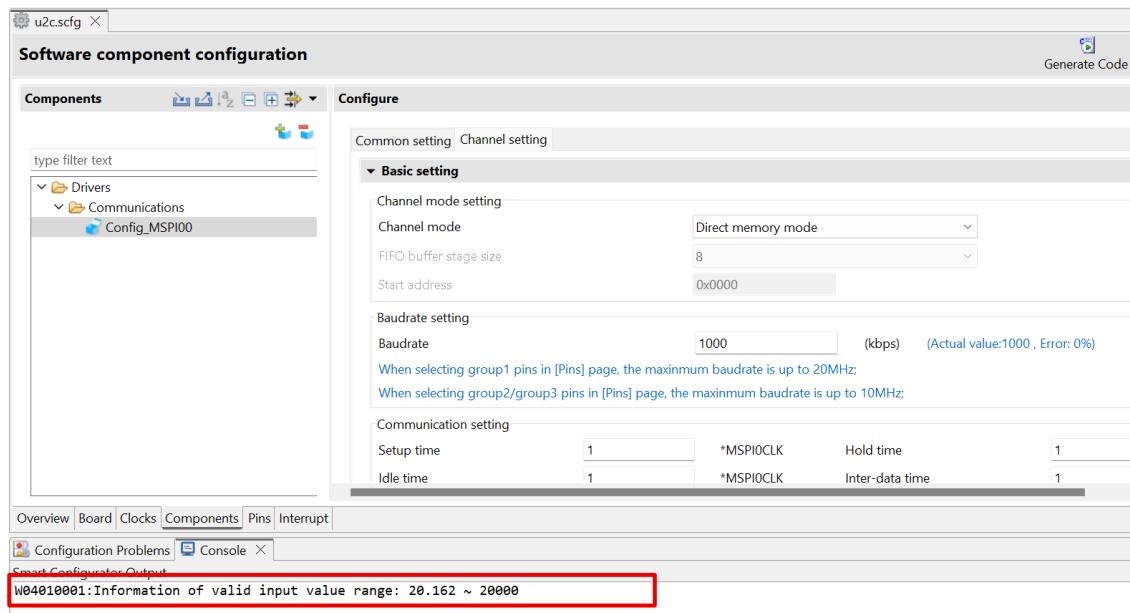


Figure 3-2 RH850/U2C MSPI Master baudrate range

From Smart Configurator for RH850 V1.15.0, the issue is fixed.

### 3.1.2 Fixed the issue X2 pin is always used

After creating Smart Configurator project, and “Input clock source” selects “EXCLK mode” in Clocks view, X2 pin is still in Enabled status which is not correct.

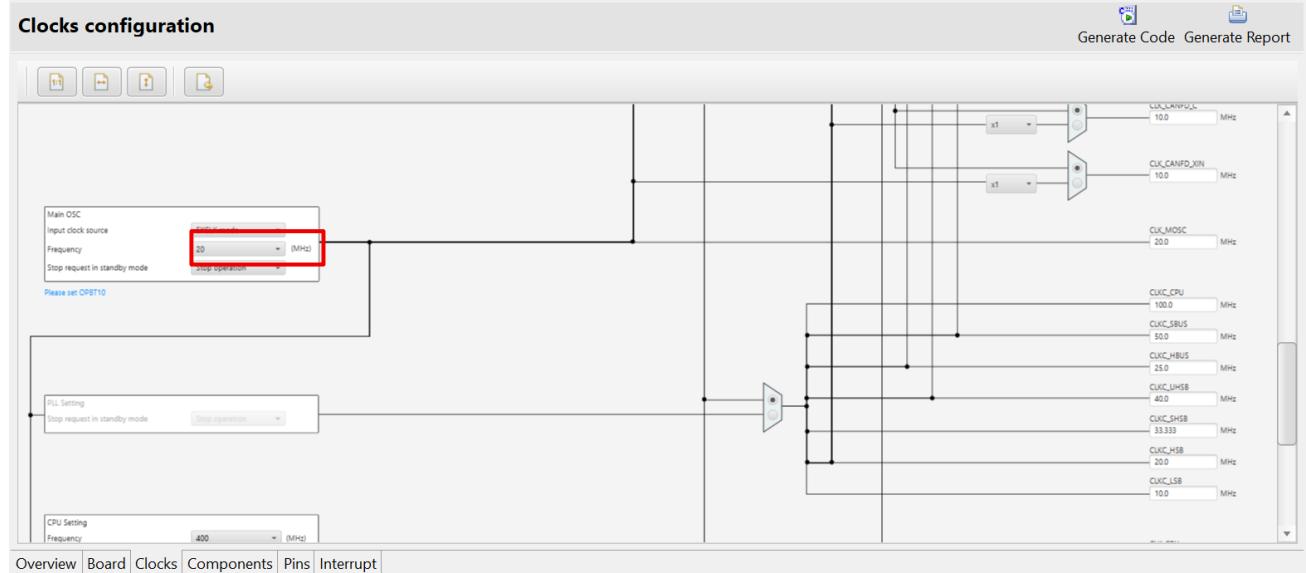


Figure 3-3 Input clock source setting

From Smart Configurator for RH850 V1.15.0, the issue is fixed.

### 3.1.3 Fixed the issue MCU package diagram displayed wrong

When creating Smart Configurator project for RH850/U2C4 – 100pin and RH850/U2C2 - 100pin packages, the pin package diagram displayed in MCU/MPU package view is not correct.

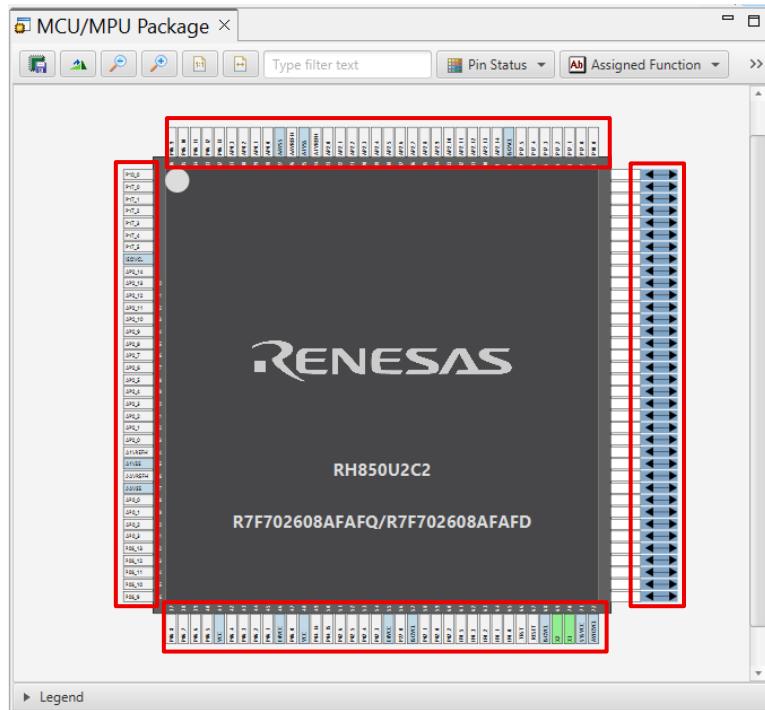


Figure 3-4 Wrong MCU package

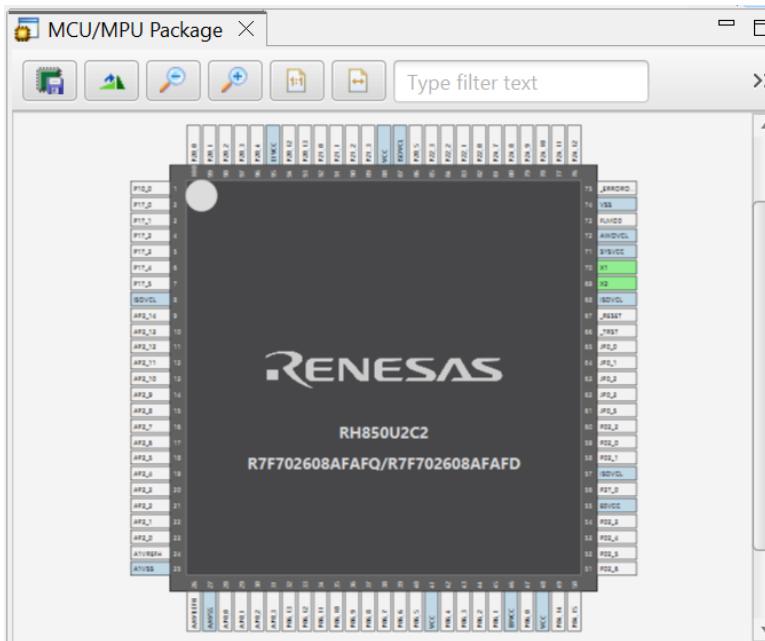


Figure 3-5 Correct MCU package

From Smart Configurator for RH850 V1.15.0, the issue is fixed.

### 3.1.4 Fixed the issue driver code generated for TAUD Input setting is not correct


When creating Smart Configurator project using Input Position Detection and selecting below Input setting, the corresponding driver code is not correct:

Input type: FCMP input

Resource: TAUD0\_0 ~ TAUD0\_3

Below driver code not generated:

```
PIC13.PIC1TAUD0TINSEL0.UINT32 |= _TAUD_INPUT_CH3_BOOST_MOSFET;
```

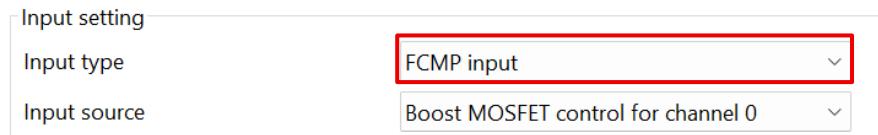

**Figure 3-6 Input type (FCMP input)**


Input type: Port output monitor

Input source: Group5

Resource: TAUD2\_0 ~TAUD2\_11

Below driver code not generated:

```
PIC13.PIC1POMONSEL.UINT8 &= _TAUD2_INPUT_MONITOR_CLEAR;
PIC13.PIC1POMONSEL.UINT8 |= _TAUD2_INPUT_CH1_MONITOR_G5_TSG30_2;
```

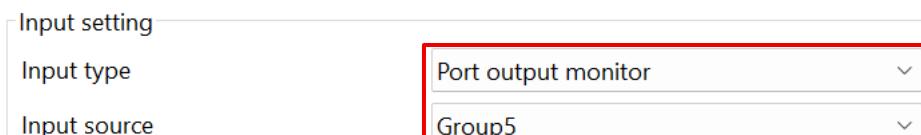


**Figure 3-7 Input type (Port output monitor)**

Input type: ATU input

Resource: TAUD0\_0 ~TAUD3\_15

Below driver code not generated:

```
PIC13.PIC1TAUD0TINSEL0.UINT32 |= _TAUD_INPUT_CH3_ATUC_CH3_SB0;
```

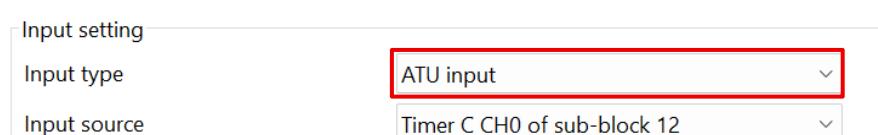

**Figure 3-8 Input type (ATU input)**

From Smart Configurator for RH850 V1.15.0, the issue is fixed.

### 3.2 Specification Changes

Table 3-2 List of Specification Changes

✓ : Applicable, -: Not Applicable

No	Description	RH850 F1KM	RH850 U2A	RH850 F1KH	RH850 C1M	RH850 U2B	RH850 U2C	RH850	Remarks
1	The backup feature is disabled by default	✓	✓	✓	✓	✓	✓		

#### 3.2.1 The backup feature is disabled by default

From Smart Configurator for RH850 V1.15.0, the backup feature is disabled by default to improve build time in e2 studio environment. If you want to use the backup feature, please enable it by setting Enable Backup settings in Preferences view:

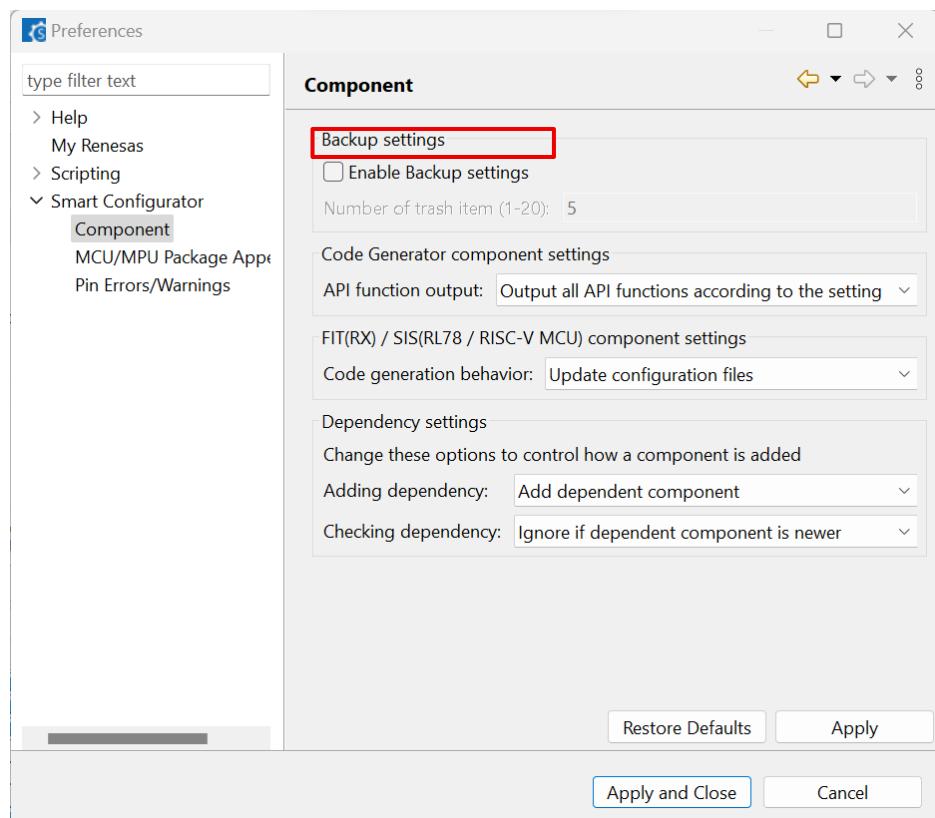


Figure 3-9 Enable Backup settings

#### 4. List of RENESAS TOOL NEWS AND TECHNICAL UPDATE

Below is a list of notifications delivered by RENESAS TOOL NEWS and TECHNICAL UPDATE.

Issue date	Document No.	Description	Applicable MCUs	Fixed version
Mar.16, 2019	R20TS0407	1. Build error occurs when setting not to generate clocks 2. RAM size display error <a href="https://www.renesas.com/document/tnn/notes-rh850-smart-configuration">https://www.renesas.com/document/tnn/notes-rh850-smart-configuration</a>	RH850F1K M	V1.2.0
Jun. 01, 2016	R20TS0431	When using PLL0 Clock <a href="https://www.renesas.com/document/tnn/notes-rh850-smart-configuration-0">https://www.renesas.com/document/tnn/notes-rh850-smart-configuration-0</a>	RH850F1K M	V1.2.0
Jul.01, 2019	R20TS0441	1. When using PWM output and triangle PWM output slave setting 2. Port input buffer setting error 3. Port drive strength control setting error 4. Port register setting error <a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850</a>	RH850F1K M	V1.2.0
Aug.01, 2019	R20TS0463	1. When using the input pulse interval measurement function 2. When using the Clocked Serial Interface in Master mode <a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-0">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-0</a>	RH850F1K M	V1.2.0
Oct.16, 2019	R20TS0500	1. When using data CRC 2. When using one-pulse outputs <a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-1">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-1</a>	RH850F1K M	V1.2.0
Apr.16, 2020	R20TS0569	When using CSI master and CSI slave <a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-2">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-2</a>	RH850F1K M	V1.3.0
May.16, 2020	R20TS0576	When using CSI master and CSI slave <a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-3">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-3</a>	RH850F1K M	V1.3.0
Feb. 16, 2021	R20TS0668	When using CSI master <a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-4">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-4</a>	RH850F1K M	V1.4.0

Issue date	Document No.	Description	Applicable MCUs	Fixed version
Apr. 05, 2021	R20TS0679	<ol style="list-style-type: none"> <li>When using CSI Master and CSI Slave with CSIG</li> <li>When using CSI Master with CSIH</li> <li>When using Data CRC</li> <li>When using One-Pulse Output and One-Shot Pulse Output</li> <li>When using PWM Output and Triangle PWM Output</li> </ol> <p><a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-5">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-5</a></p>	RH850F1K M RH850U2A	V1.4.0
Jun.16, 2021	R20TS0717	<ol style="list-style-type: none"> <li>When using A/D converter with ADCJ2</li> </ol> <p><a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-6">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-6</a></p>	RH850U2A	V1.5.0
Jul. 01, 2021	R20TS0723	<ol style="list-style-type: none"> <li>Notes on using One-Shot Pulse Output, PWM Output, Triangle PWM Output, Triangle PWM Output with Dead Time functions with TAUD1, TAUD2</li> </ol> <p><a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-7">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-7</a></p>	RH850U2A	V1.5.0
Sep. 16, 2021	R20TS0744	<ol style="list-style-type: none"> <li>Notes on selecting PLL0 clock CPLL0OUT as source of CPU Subsystem clock</li> <li>Notes on using CSIH Master receive and Master transmit/receive operation mode</li> </ol> <p><a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-8">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-8</a></p>	RH850F1K M RH850F1K H	V1.5.0
Feb. 01, 2022	R20TS0806	<ol style="list-style-type: none"> <li>Notes on using T&amp;H path self-diagnosis function of A/D Converter</li> <li>Notes on redundant macros and wrong comments in A/D Converter header file</li> </ol> <p><a href="https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-9">https://www.renesas.com/document/tnn/notes-smart-configuration-rh850-9</a></p>	RH850U2A	V1.6.0

## 5. Points for Limitation

This section describes points for limitation regarding the Smart Configurator for RH850 V1.15.0.

### 5.1 List of Limitation

**Table 5-1 List of Limitation**


✓ : Applicable, -: Not Applicable

No	Description	RH850 F1KM	RH850 U2A	RH850 F1KH	RH850 C1M	RH850 U2B	RH850 U2C	RH850 U2B-E	Remarks
1	Note on using RIIC	✓	✓	✓	-	✓	✓	✓	
2	Note on using OS Timer	✓	-	✓	-	-	-	-	
3	Note on using All Toolchain (CC-RH, GHS, IAR)	-	-	-	-	✓	✓	✓	
4	Note on UI display with High Contrast theme on Linux OS	✓	✓	✓	✓	✓	✓	✓	
5	Note on using Ports	-	-	-	-	✓	-	-	

### 5.2 Details of Limitation

#### 5.2.1 Note on using RIIC

When using RIIC master or RIIC Slave to send or receive data, error interrupt priority must be higher than any other interrupt priority.

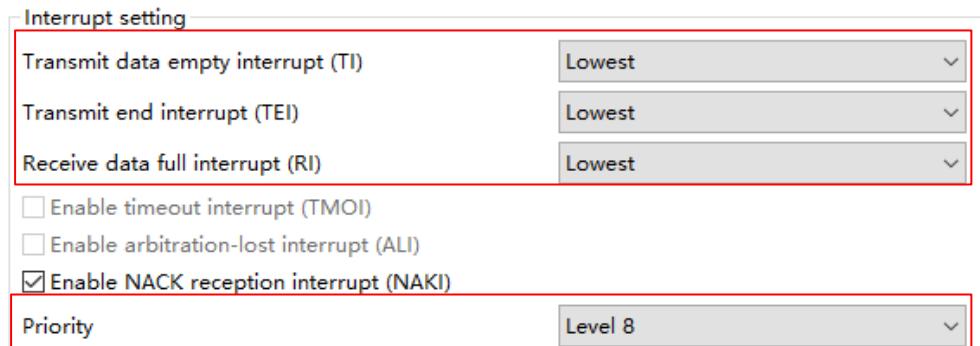

**Figure 5-1. RIIC interrupt priority setting**

### 5.2.2 Note on using OS Timer

Smart Configurator only supports OSTM0, OSTM1~OSTM4 are not supported.

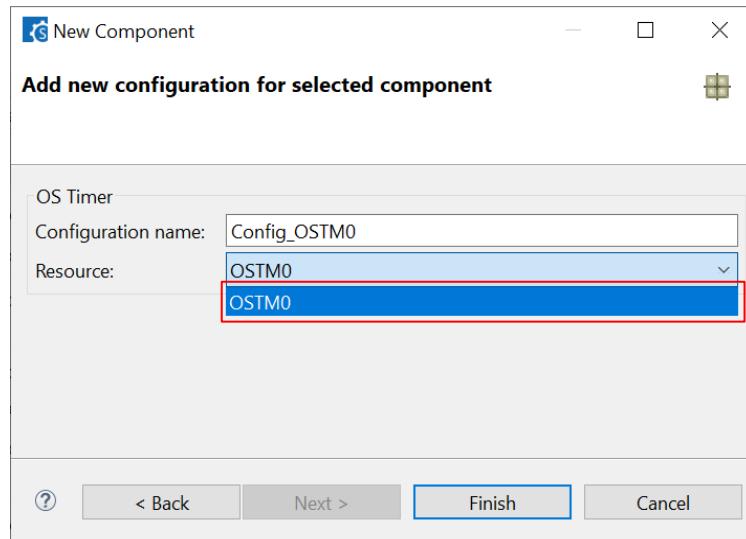


Figure 5-2 OS Timer Resource selection

### 5.2.3 Note on using All Toolchain (CC-RH, GHS, IAR)

When selecting RH850/U2B or RH850/U2C devices and All Toolchain (CC-RH, GHS, IAR) to create project, the generated code does not support IAR compiler, the reason is:

IAR Embedded Workbench for RH850 V3.10.1 doesn't support RH850/U2B and RH850/U2C yet, so Smart Configurator doesn't generate code adapted to IAR compiler.

All toolchain (CC-RH, GHS, IAR) will be changed to All Toolchain (CC-RH, GHS) in future.

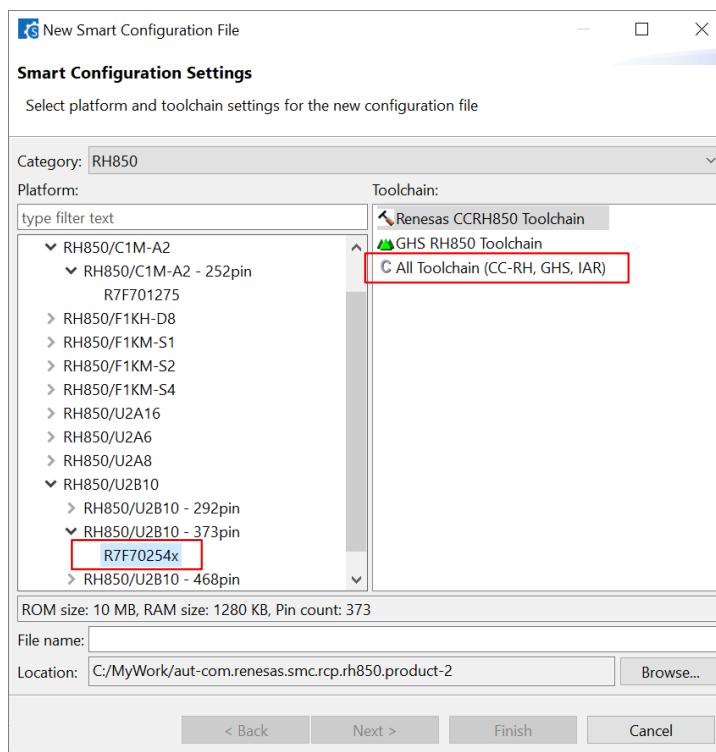


Figure 5-3 All Toolchain (CC-RH, GHS, IAR) selection

### 5.2.4 Note on UI display with High Contrast theme on Linux OS

When using e<sup>2</sup> studio with High Contrast theme on Linux OS, some display texts of Smart Configurator cannot be seen. To avoid this issue, please use other themes.



Figure 5-4 UI display with High Contrast theme

### 5.2.5 Note on using Ports

When using P40\_m( $m=0\sim 15$ ) of Ports, generating driver code and then building the code, there is build error issue occurring because unsupported register “PORT0.PM40(UINT16” is generated in API “R\_Config\_PORT\_Create()”.

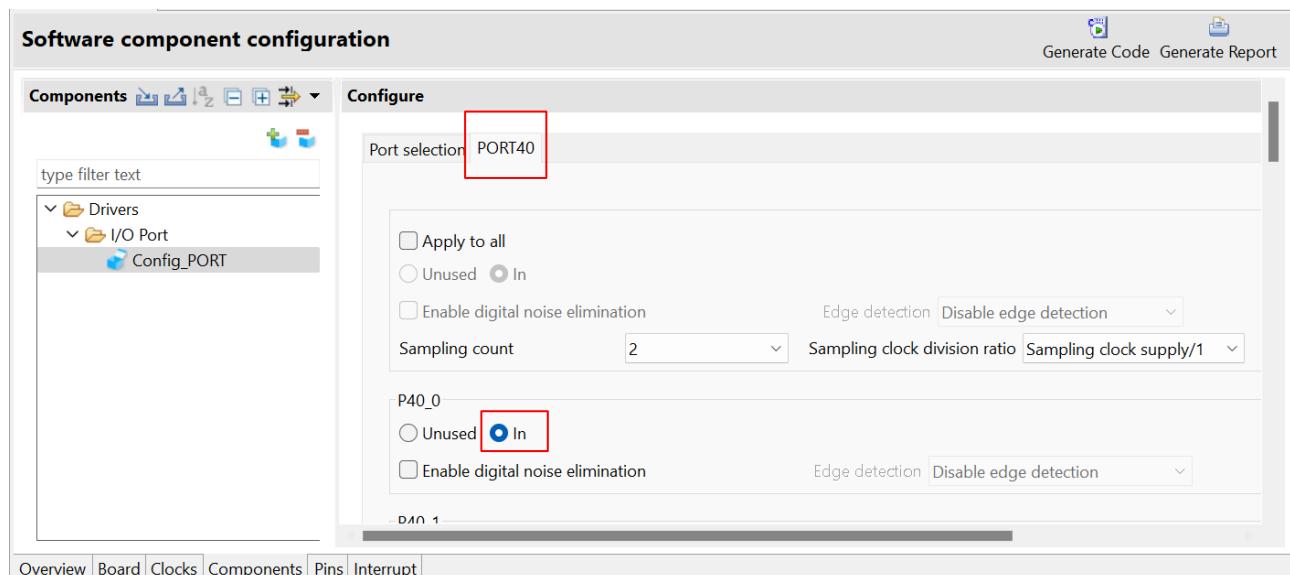


Figure 5-5. Ports configuration

Workaround for fixing this issue is to correct the register name in API “R\_Config\_PORT\_Create()” in file “Config\_PORT.c”:

Wrong: g\_cg\_sync\_read = PORT0.PM40(UINT16;  
Correct: g\_cg\_sync\_read = PORT0.PMC40(UINT16;

## 6. Points for Caution

This section describes points for caution regarding the Smart Configurator for RH850 V1.15.0.

### 6.1 List of Caution

Table 6-1 List of Caution

✓: Applicable, -: Not Applicable

No	Description	RH850 F1KM	RH850 U2A	RH850 F1KH	RH850 C1M	RH850 U2B	RH850 U2C	RH850 U2B-E	RH850 U2B	Remarks
1	About the I/O define header file	✓	✓	✓	✓	✓	✓	✓	✓	
2	About loading the project on CS+	✓	✓	✓	✓	✓	✓	✓	✓	
3	About the sample projects	✓	✓	✓	✓	✓	✓	✓	✓	
4	About the decimal point	✓	✓	✓	✓	✓	✓	✓	✓	
5	Note on pins sharing functions.	✓	✓	✓	✓	✓	✓	✓	✓	
6	Note on Interrupt Controller resource name	✓	-	-	-	-	-	-	-	
7	Note on DMA/DTS trigger generator setting of MSPI Master	-	✓	-	-	✓	✓	✓	✓	
8	Note on CPU Operating mode of DTS Controller	-	✓	-	-	-	-	-	-	
9	Note on using Smart Configurator when the OS language is Japanese	-	✓	-	-	✓	✓	✓	✓	
10	Note on changing device when using Error Control Module	-	✓	-	✓	-	-	-	-	
11	Note on reloading project for Error Control Module	-	✓	-	-	-	-	-	-	
12	Note on the "Release Notes" or "Tool News" display issue in Renesas Website	✓	✓	✓	✓	✓	-	-	-	
13	Note on using Smart Configurator for RH850 project in CS+	✓	✓	✓	✓	✓	✓	✓	✓	
14	Note on using RH850/U2A devices	-	✓	-	-	-	-	-	-	

## 6.2 Details of Caution

### 6.2.1 About the I/O define header file

Please use Renesas iodefine.h for the header file that defines the register. Because RH850 Smart Configurator outputs code conforming to the definition in Renesas iodefine.h, a build error occurs when using the register definition file provided by other environments.

### 6.2.2 About loading the project on CS+

When launching RH850 Smart Configurator from CS+, please set 'RH850 Build tool CC-RH plugin' and 'RH850 Build tool GHS CCRH850 plugin' to enable. If these plugins are disable, the error occurs when CS+ project that includes the setting of RH850 Smart Configurator is loaded.

### 6.2.3 About the sample project

The RH850 Smart Configurator does not output the processing after resetting the microcontroller (including the startup routine).

Therefore, we provide sample projects that include sample startup routines and other necessary processing so that user applications can be built immediately after peripheral modules are set up using the RH850 Smart Configurator.

Please refer to the user guide for sample projects under installation path.

Default installation path:

C:\Program Files (x86)\Renesas Electronics\SmartConfigurator\RH850\

### 6.2.4 About the decimal point

For error-free operation of the RH850 Smart Configurator, use a period (".") as the decimal point and a comma (",") as the digit grouping separator. Which of "." (period), "," (comma) or " " (space) is used as the decimal point or digit grouping separator differs depending on the language setting of the Windows OS that is used. For example, if you use a comma (",") as the decimal point, the RH850 Smart Configurator may not work correctly. This will occur when you are using Windows OS with language set to other than Japanese or English. If you are using the RH850 Smart Configurator on Windows OS with language set to other than Japanese or English, change the language setting to Japanese or English.

### 6.2.5 Note on pins sharing functions

When function shared pin selects a shared pin, shared pin displays an error.

But the shared pin can be selected correctly and work correctly.

Example) For RH850/U2A RSENT0

Assign RSENT0RX and RSENT0SPCO to the T24 pin

When assigned: T24 pin displays an error

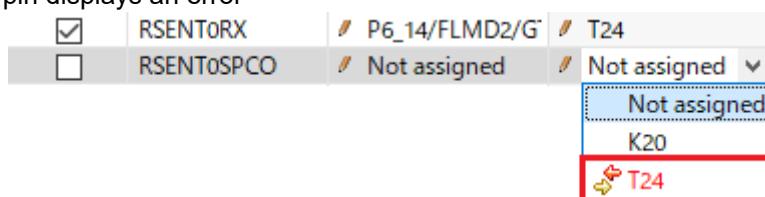


Figure 6-1. pins sharing function sample when assigned

After assignment




Figure 6-2. pins sharing function sample after assigned

### 6.2.6 Note on Interrupt Controller resource name

In RH850 Smart Configurator V1.2.0, the resource name of the interrupt controller has been changed to "INTC". The resource name of the interrupt controller of the previous version is automatically changed from "ICU" to "INTC".

Therefore, the following file name and macro name are changed.

Table 6-2 File name change

Before change	After change
r_cg_icu.h	r_cg_intc.h

Table 6-3 Macro name change

File name	Before change	After change
r_smc_interrupt.h	ICU_xxx_PRIORITY	INTC_xxx_PRIORITY

### 6.2.7 Note on DMA/DTS trigger generator setting of MSPI Master

If alternative trigger is selected in Smart Configurator for RH850 V1.5.0, when reloading the project file (.scfg file) into Smart Configurator for RH850 V1.6.0, the alternative trigger signal "Use alternative trigger" can't be reloaded and the default trigger signal "Trigger1(DTSMSPI12)/Trigger2(DTSMSPI13)" will be used.

There isn't this cautions when reloading project between Smart Configurator for RH850 V1.5.0 and before, or between Smart Configurator for RH850 V1.6.0 and later.

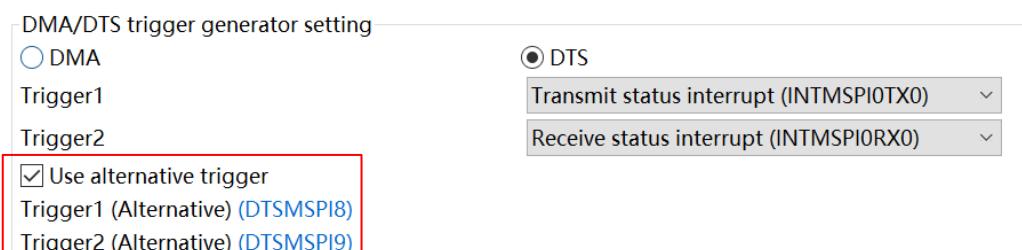


Figure 6-3. "Use alternative trigger" checked in Smart Configurator for RH850 V1.5.0

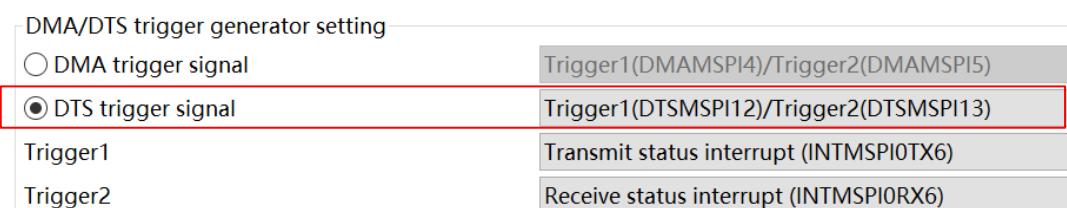


Figure 6-4. "Trigger1(DTSMSPI12/Trigger2(DTSMSPI13)" selected after reloading in Smart Configurator for RH850 V1.6.0

### 6.2.8 Note on CPU Operating mode of DTS Controller

If CPU operating mode selects “User mode” in Smart Configurator for RH850 V1.5.0, after reloading the project in Smart Configurator for RH850 V1.6.0, CPU operating mode will be changed to “Supervisor mode” which is default setting.

There isn't this cautions when reloading project between Smart Configurator for RH850 V1.5.0 and before, or between Smart Configurator for RH850 V1.6.0 and later.



Figure 6-5. CPU operating mode in Smart Configurator for RH850 V1.5.0

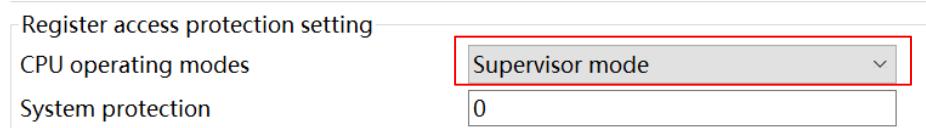


Figure 6-6. CPU operating mode after reloading in Smart Configurator for RH850 V1.6.0

### 6.2.9 Note on using Smart Configurator when the OS language is Japanese

For RH850/U2x users, we recommend using Smart Configurator on English OS. If your OS is Japanese, you also can add “-Duser.language=en” to “<install directory>\SmartConfigurator\RH850\eclipse\SmartConfigurator.ini” file, then you can see English GUI in Smart Configurator. For RH850/U2x, Smart Configurator Japanese UI is just for your reference, and we do not recommend that you use it.

### 6.2.10 Note on changing device when using Error Control Module


When using Error Control Module, we don't recommend changing device between RH850/U2A and RH850/C1M. Because most of the error sources of these two devices are different, the error sources can't migrate.

### 6.2.11 Note on reloading project for Error Control Module


If user used some error sources of Error Control Module in the project created using Smart Configurator for RH850 V1.7.0 or earlier, when reloading the project using Smart Configurator for RH850 V1.8.0 or later, the error source will be different between the two versions.

Figure 6-7 and Figure 6-8 show the difference.


Figure 6-9 shows the error sources that have such issue.

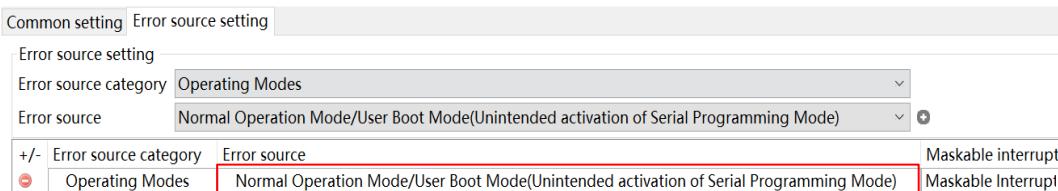

**Figure 6-7. Error source added in Smart Configurator for RH850 V1.7.0 or earlier**

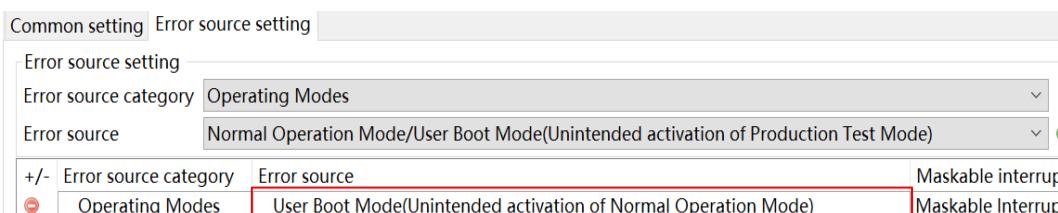

**Figure 6-8. Error source reloaded in Smart Configurator for RH850 V1.8.0 or later**

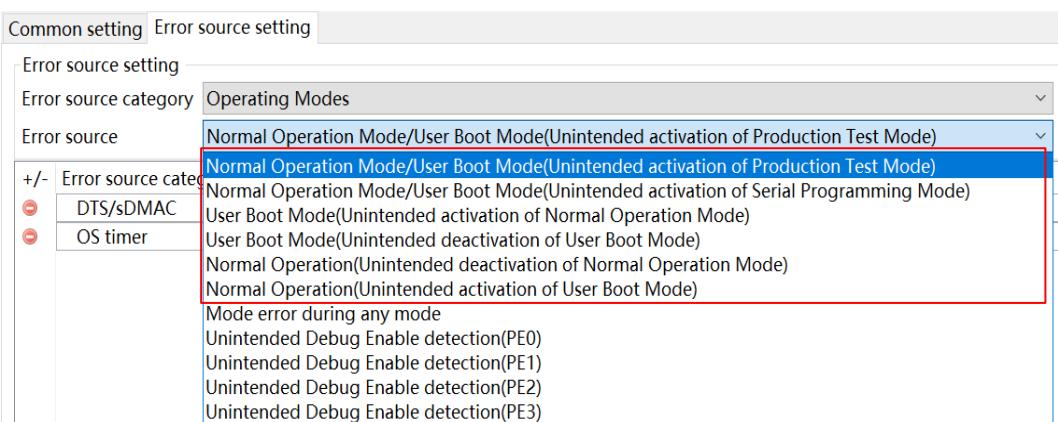

**Figure 6-9. Error sources that have such issue**

**6.2.12 Note on the “Release Notes”, “Tool News” display issue in Renesas Website**

For Smart Configurator for RH850 V1.14.0 or before version, release note or tools news might not be displayed correctly on Renesas Website after clicking the “Renesas Notes” or “Tool News” under the help menu of Smart Configurator.

As a workaround, please use the URL directly:

- Release Notes: <https://www.renesas.com/en/software-tool/rh850-smart-configuration?documents-type-filter=release-note#documents>
- Tool News: <https://www.renesas.com/en/software-tool/rh850-smart-configuration?documents-type-filter=tool-news-note#documents>
- 

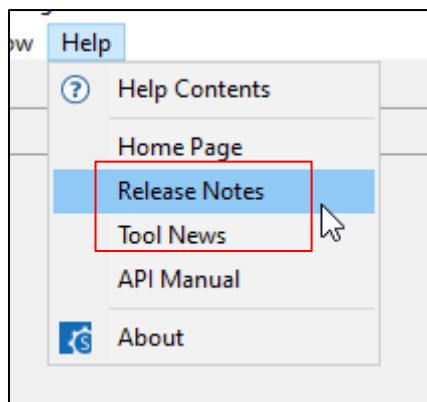


Figure 6-10 Help menu of Smart Configurator

### 6.2.13 Note on using Smart Configurator for RH850 in CS+

When you want to use Smart Configurator for RH850 in CS+, Please take note to select below six kinds of projects in “Create project” dialog of CS+:

- Application(CC-RH) (for single-core devices, such as RH850/F1KM)
- Application for Multi-core(CC-RH) (for multi-core devices, such as RH850/C1M-A2, RH850/F1KH, RH850/U2A, RH850/U2B)
- Empty Application(CC-RH)
- Library(CC-RH)
- Empty Application(GHS CCRH850)
- Application(RH850V4,CC-RH)
- 

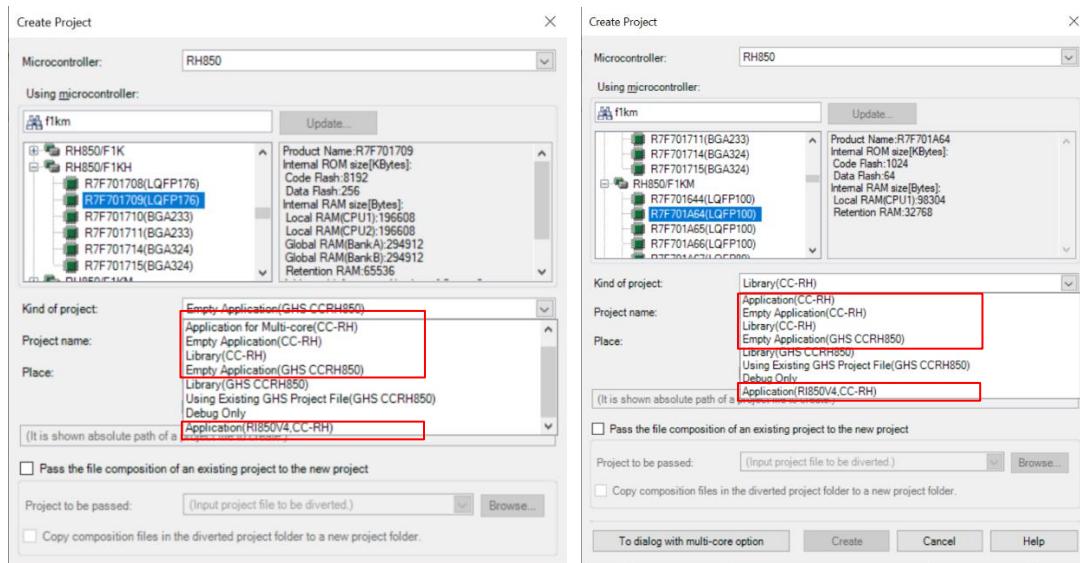


Figure 6-11 Kinds of project for multi-core devices and single-core devices

### 6.2.14 Note on using RH850/U2A devices

For RH850/U2A devices, if using Smart Configurator for RH850 in CS+ CC for V8.11.01 and later, please use Smart Configurator for RH850 V1.12.00 and later; when using Smart Configurator for RH850 in CS+ CC for V8.11.00 and before, please use Smart Configurator for RH850 V1.11.00 and before; otherwise, there would be build error because of the RH850/U2A device file update.

In e<sup>2</sup> studio 2024-04 there is build error too for RH850/U2A devices when using Smart Configurator for RH850. In order to avoid the build error, please use e<sup>2</sup> studio 2024-01, or e<sup>2</sup> studio 2024-07 or later.

## Revision History

Rev.	Section	Description
1.00	-	First edition issued

# General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

## 1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity.

Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

## 2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

## 3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

## 4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

## 5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

## 6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between  $V_{IL}$  (Max.) and  $V_{IH}$  (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between  $V_{IL}$  (Max.) and  $V_{IH}$  (Min.).

## 7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

## 8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
  - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
  - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. **RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.**
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

## Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan

[www.renesas.com](http://www.renesas.com)

## Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

## Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit: [www.renesas.com/contact/](http://www.renesas.com/contact/).